



MONUMENT PARK, PRINCETON (BLDG. 22)

MONUMENT PARK STAKE

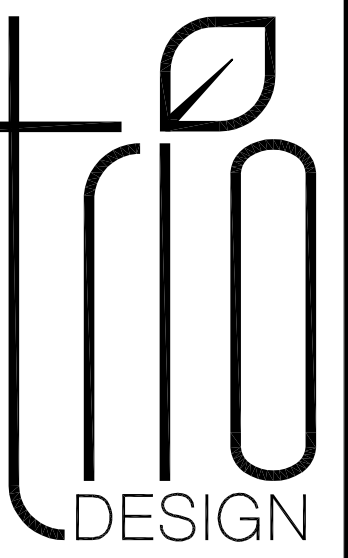

3895 WEST 7800 SOUTH #201
WEST JORDAN, UT 84088
801.417.9951
www.triodesigninc.com

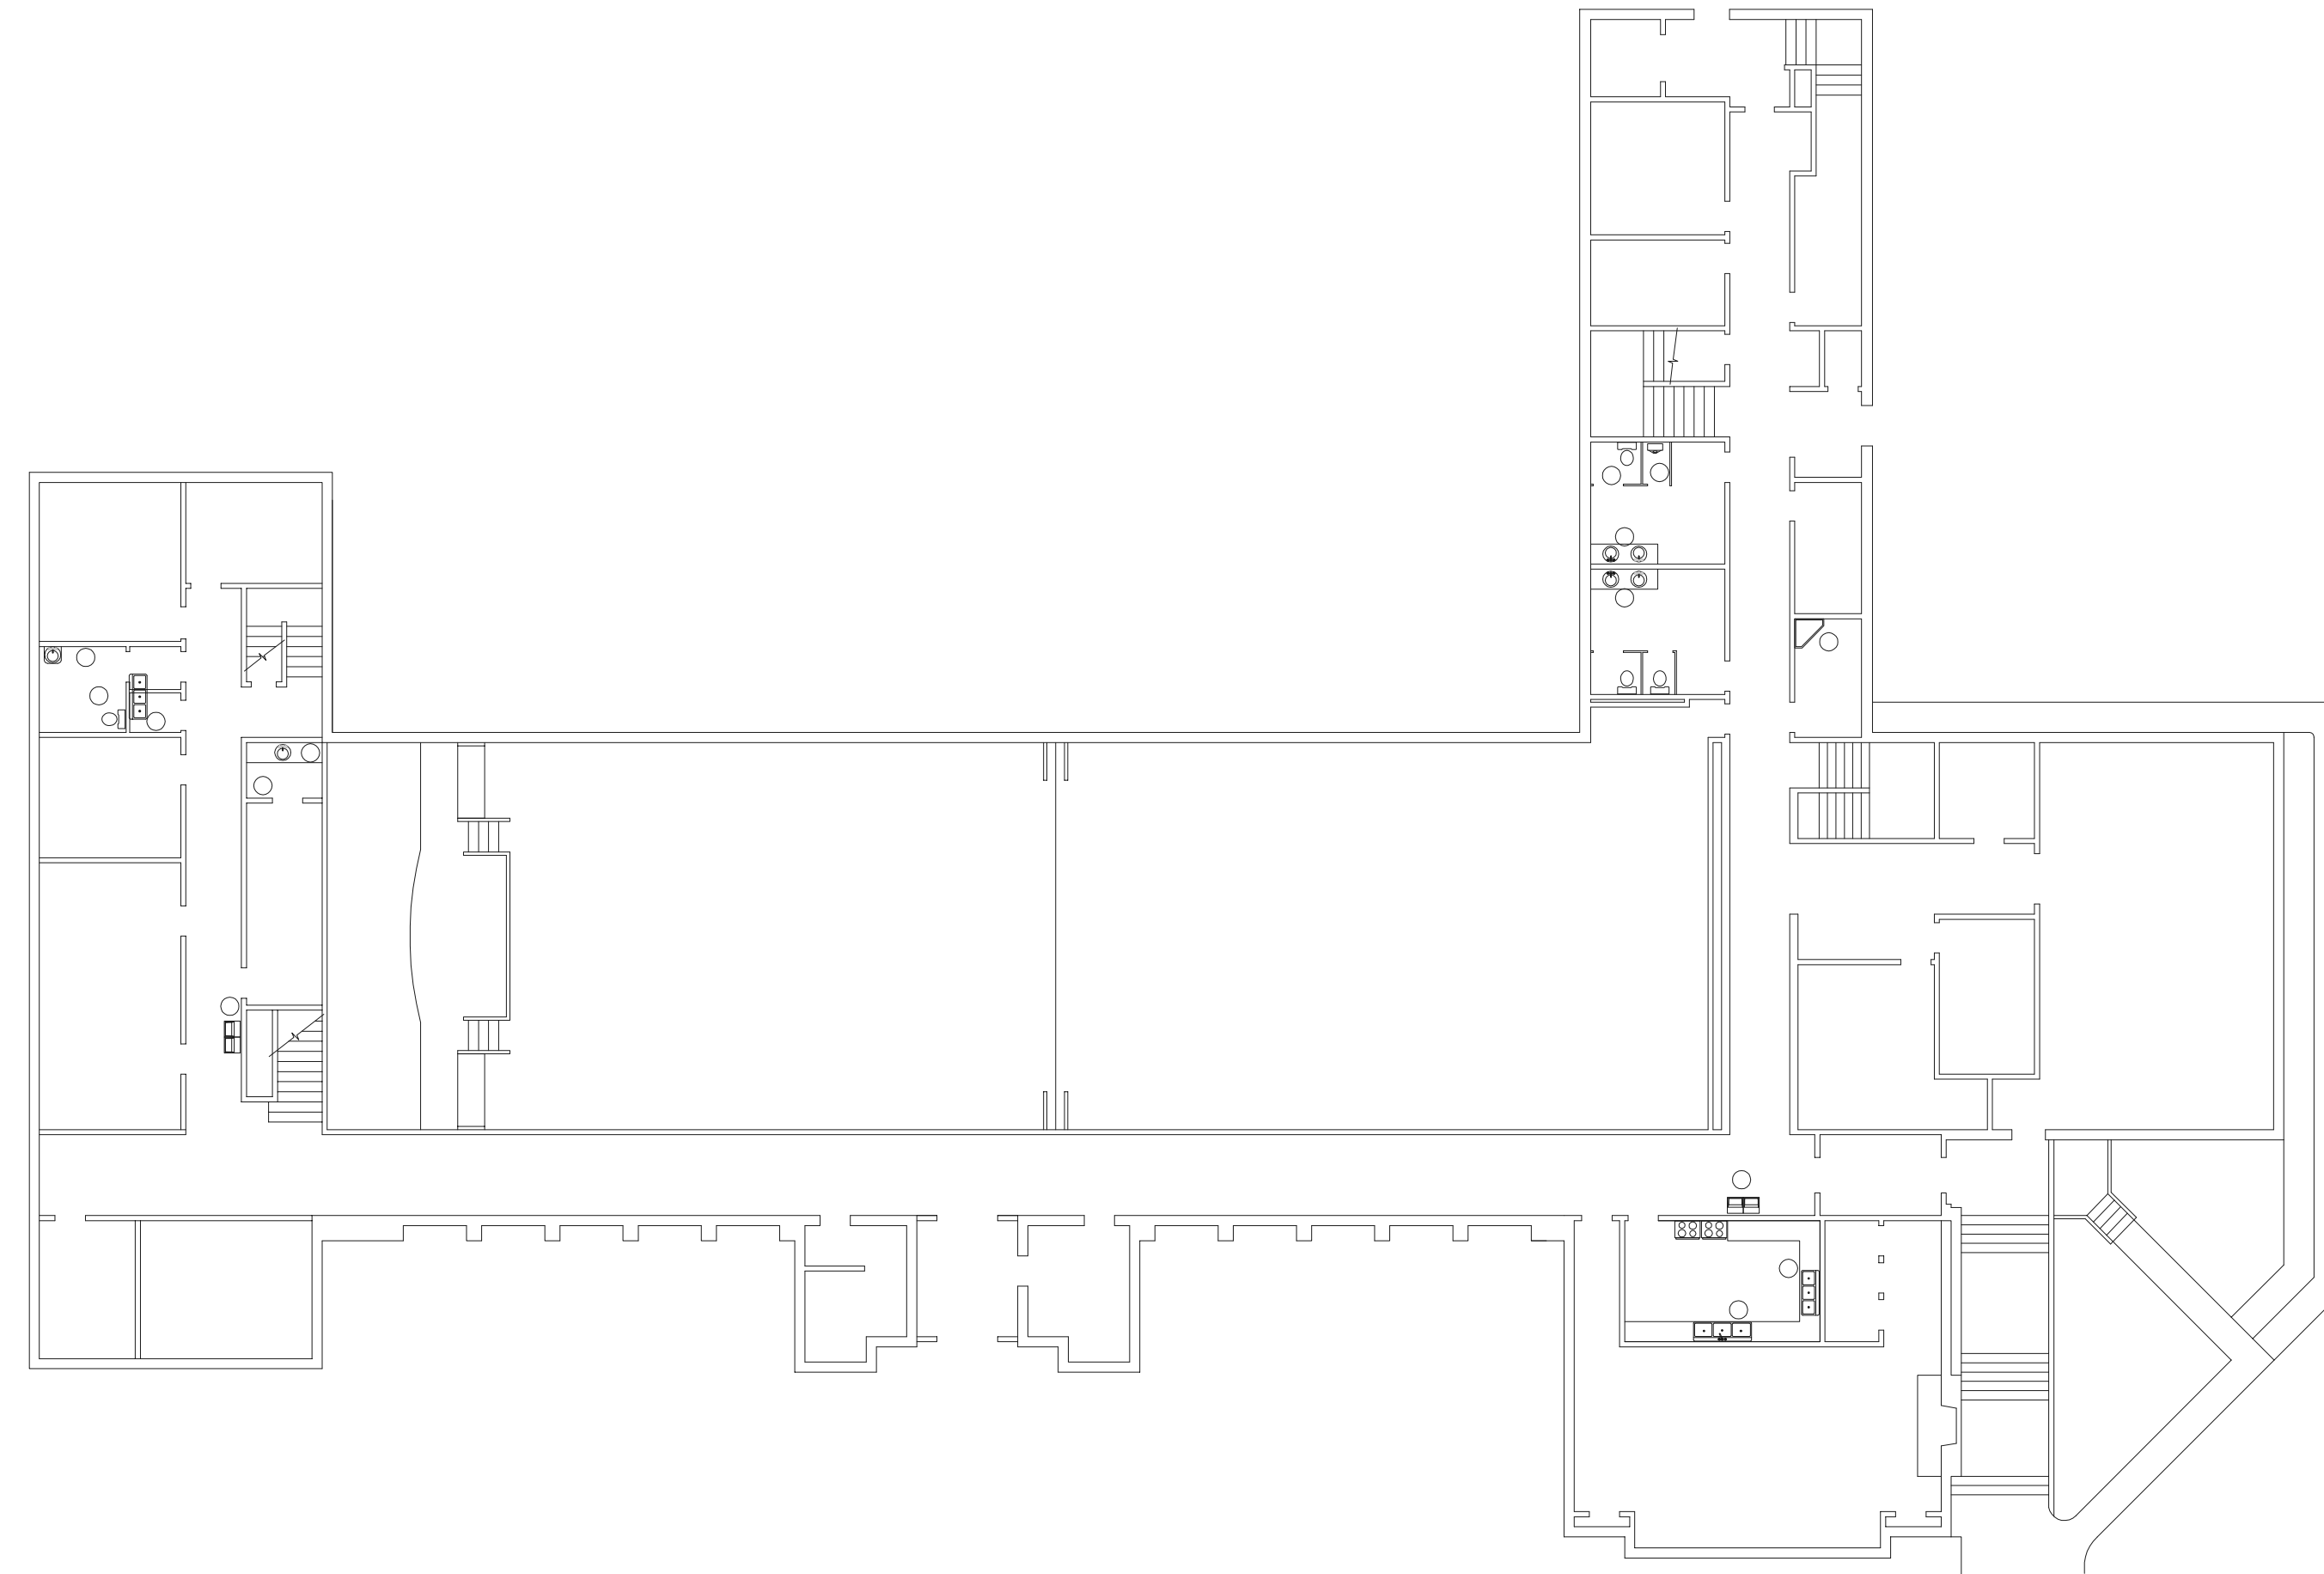

PROJECT NAME:

MONUMENT PARK,
PRINCETON (BLDG. 22)
MONUMENT PARK STAKE
1005 S. 2000 E. SALT LAKE CITY, UT

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

REVISIONS:

ARCHITECT & CONSULTANTS


STANDARD SYMBOLS LEGEND

VICINITY MAP

SHEET NUMBER

ARCHITECT
TRIO DESIGN, INC.
BRITTANY WHITE JOHNSON
3895 WEST 7800 SO, SUITE 201
WEST JORDAN, UT 84088
(801) 417-9951

DETAIL		DETAIL LETTER SHEET NUMBER
SECTION		SECTION LETTER SHEET NUMBER
SHEET REFERENCE		DETAIL LETTER SHEET NUMBER
ELEVATION (VIEW)		ELEVATION LETTER SHEET NUMBER
ELEVATION (DATUM)		

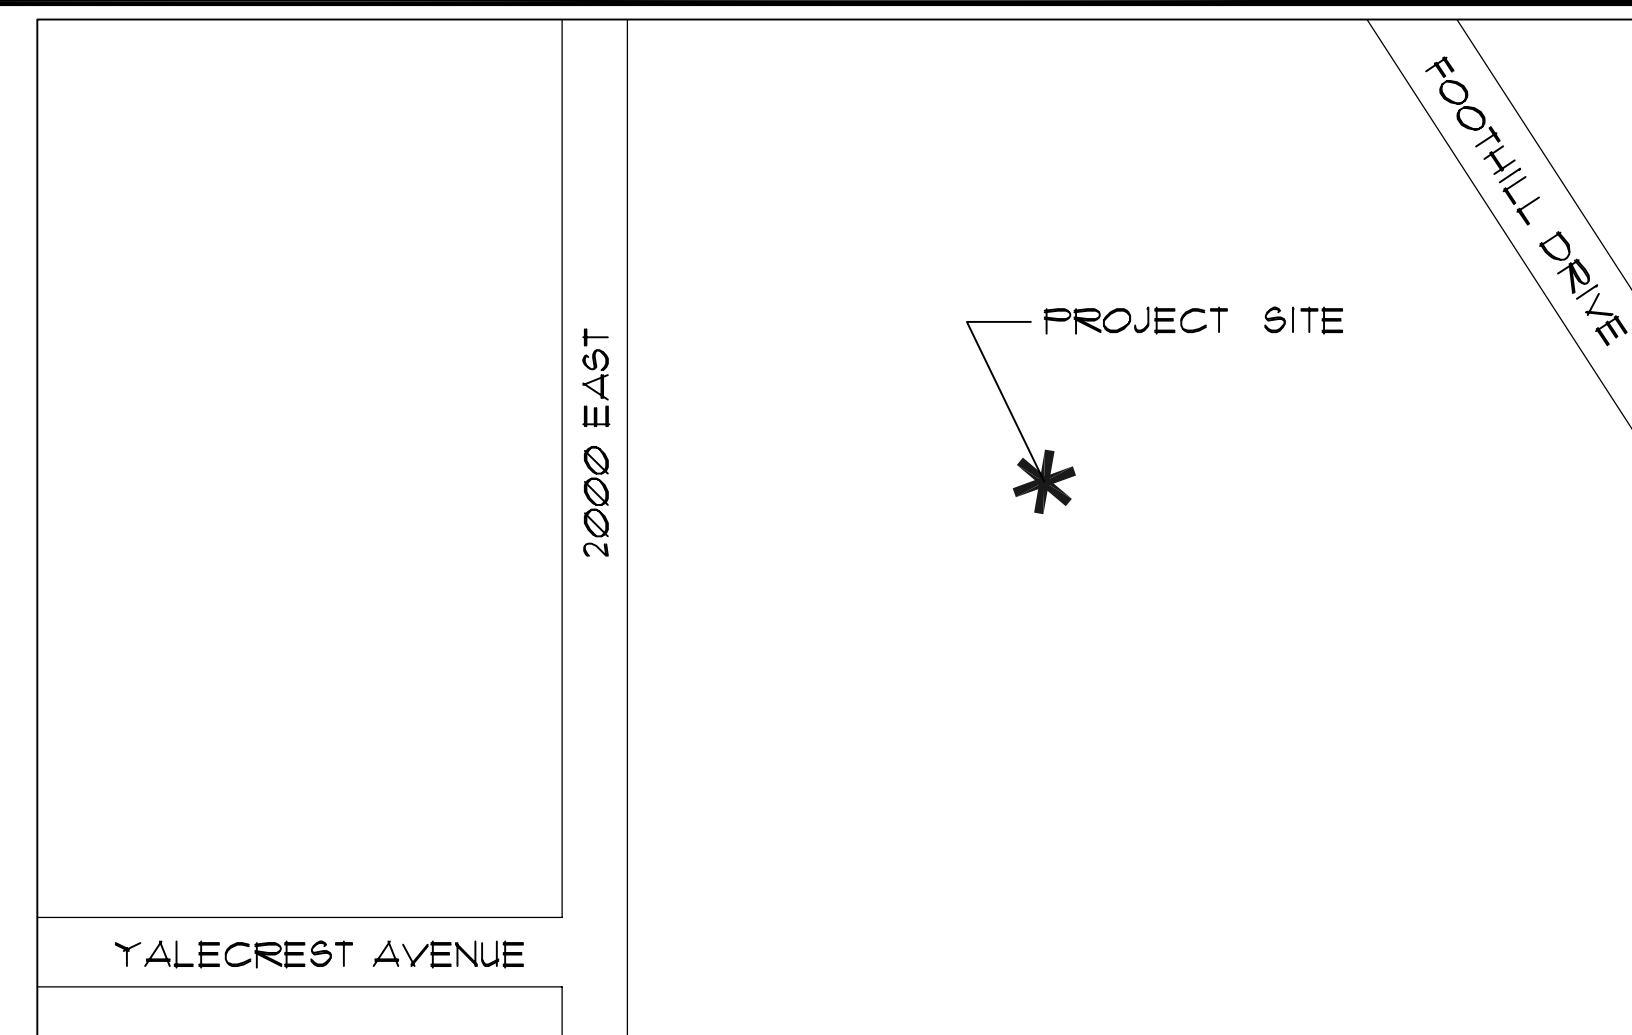

SHEET NUMBER	DESCRIPTION
G.1	GENERAL COVER / INDEX SHEET
A.1	ARCHITECTURAL MAIN FLOOR PLAN
A.2	ARCHITECTURAL LOWER AND UPPER PLANS
P.1	MECHANICAL MAIN AND UPPER FLOOR PLUMBING PLAN
P.2	MECHANICAL LOWER FLOOR PLUMBING LINE
P.1D	MECHANICAL MAIN AND UPPER FLOOR PLUMBING DEMO PLAN
P.2D	MECHANICAL LOWER FLOOR PLUMBING DEMO PLAN

Date: APRIL 28 / 2017

Plan Series:


Property Number: 506-8525

Sheet Title:

COVER INDEX SHEET

Sheet No.:

G.1

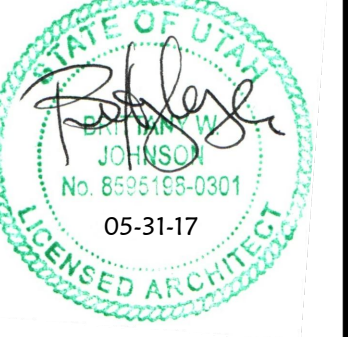

PROJECT NAME:

MONUMENT PARK,
PRINCETON (BLDG. 22)
MONUMENT PARK STAKE
1005 S. 2000 E., SALT LAKE CITY, UT

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

REVISIONS:

Date:
APRIL 28 / 2017

Plan Series:

Property Number:
506-8525

Sheet Title:


MAIN FLOOR
PLAN

Sheet No.:


A.1

KEYED NOTES

- 1 CAREFULLY REMOVE DRINKING FOUNTAIN, CUT OUT CERAMIC TILE AT COURSE LINES, REMOVE G.W.B. (GYPSUM WALL BOARD) AS NEEDED TO REPLACE PLUMBING LINE. PATCH G.W.B., INSTALL CERAMIC TILE, MATCH EXISTING.
- 2 REMOVE BOTTOM SHELF OF BASE CABINET AND 12" X 12" PORTION OF BACK OF CABINET AND WALL PLASTER TO PROVIDE ACCESS FOR NEW PLUMBING SUPPLY LINE TO SINK. PATCH WALL, SEAL AROUND PLUMBING LINE, INSTALL NEW BACK PANEL AND BOTTOM SHELF TO BASE CABINET.
- 3 REMOVE VERTICAL SECTION OF WALL FLOOR TO CEILING, TO ALLOW REMOVAL AND REPLACEMENT OF PLUMBING SUPPLY LINES TO 2ND FLOOR. PATCH WALL & FINISH TO MATCH EXISTING.
- 4 REMOVE MOP SINK AND VERTICAL SECTION OF WALL TO ALLOW REMOVAL AND REPLACEMENT OF PLUMBING SUPPLY LINES, PATCH WALL AND FINISH TO MATCH EXISTING SURFACES. REPLACE MOP SINK.
- 5 REMOVE 12" WIDE SECTION OF CERAMIC TILE AND G.W.B. (GYPSUM WALL BOARD) TO PROVIDE ACCESS FOR NEW PLUMBING SUPPLY LINE TO WATER CLOSET. INSTALL NEW G.W.B. AND CERAMIC TILE. SEAL AROUND PLUMBING. MATCH EXISTING CERAMIC TILE.
- 6 REMOVE 12" WIDE SECTION OF CERAMIC AND G.W.B. FROM BELOW SINK DOWN TO FLOOR TO PROVIDE ACCESS FOR NEW PLUMBING LINES. INSTALL NEW G.W.B. AND CERAMIC TILE. SEAL AROUND PLUMBING LINES, MATCH EXISTING CERAMIC TILE.
- 7 REMOVE 12" WIDE, DOWN TO FLOOR, SECTION OF CERAMIC TILE AND G.W.B. TO PROVIDE ACCESS FOR INSTALLATION OF NEW PLUMBING LINES TO VANITY SINK, AS REQUIRED FOR EACH SINK.
- 8 REMOVE URINAL AND 12" WIDE SECTION OF CERAMIC TILE AND G.W.B. TO PROVIDE ACCESS FOR NEW PLUMBING SUPPLY LINE TO URINAL. INSTALL NEW G.W.B. AND CERAMIC TILE. SEAL AROUND PLUMBING. MATCH EXISTING CERAMIC TILE. RE-INSTALL URINAL.
- 9 REMOVE 18" WIDE SECTION OF G.W.B. AND CERAMIC TILE FROM PLUMBING FIXTURE DOWN TO MOP SINK TO PROVIDE ACCESS FOR INSTALLATION OF NEW PLUMBING SUPPLY LINES. INSTALL NEW G.W.B. AND CERAMIC TILE. MATCH EXISTING CERAMIC TILE & REPAINT EAST WALL. MATCH EXISTING.
- 10 REMOVE SECTION OF CEILING TO ALLOW REMOVAL AND REPLACEMENT OF PLUMBING SUPPLY LINES. PATCH AND REPLACE CEILING. MATCH EXISTING.
- 11 FRAME IN VERTICAL CHASE 12" X 12" WITH ACCESS DOOR AT VALVE.

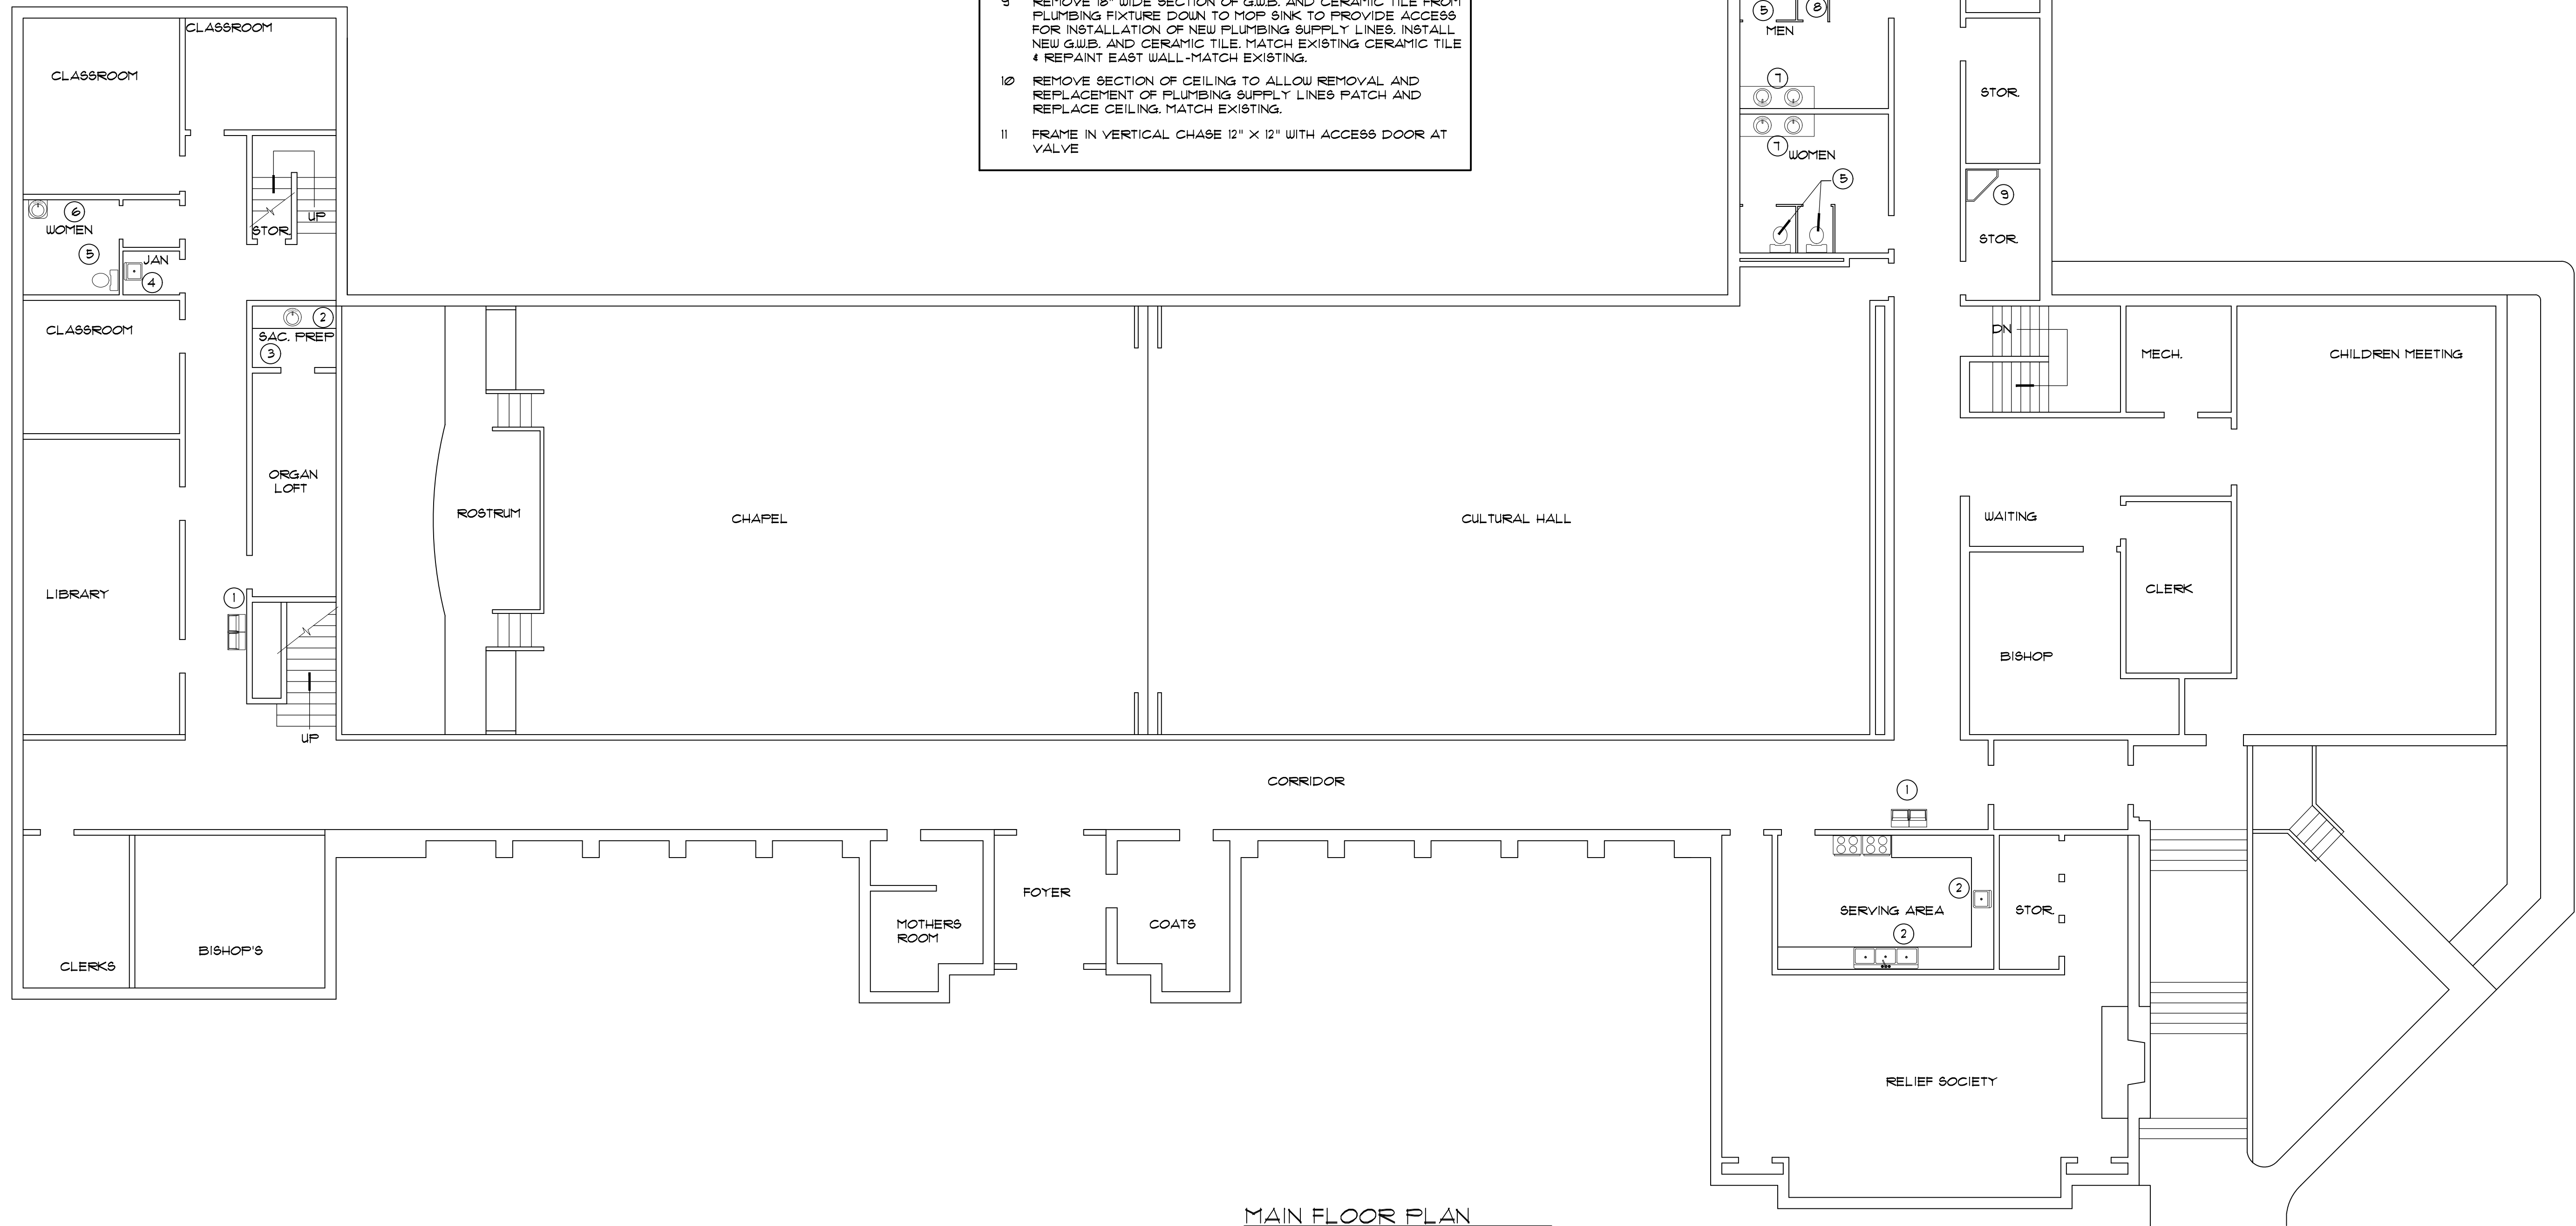

MAIN FLOOR PLAN
SCALE: 1/8" = 1'-0"

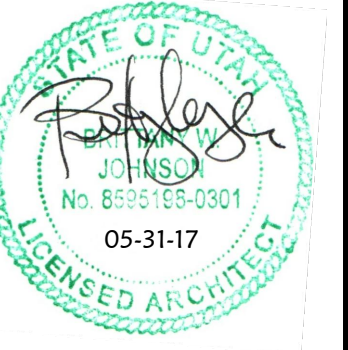

PROJECT NAME:

MONUMENT PARK,
PRINCETON (BLDG. 22)
MONUMENT PARK STAKE
1005 S. 2000 E., SALT LAKE CITY, UT

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

REVISIONS:

Date:
APRIL 28 / 2017

Plan Series:

Property Number:
506-8525

Sheet Title:



LOWER &
UPPER PLANS


Sheet No.:

A.2


KEYED NOTES

- 1 CAREFULLY REMOVE DRINKING FOUNTAIN, CUT OUT CERAMIC TILE AT COURSE LINES, REMOVE G.W.B. (GYPSUM WALL BOARD) AS NEEDED TO REPLACE PLUMBING LINE, PATCH G.W.B., INSTALL CERAMIC TILE, MATCH EXISTING.
- 2 REMOVE BOTTOM SHELF OF BASE CABINET AND 12" X 12" PORTION OF BACK OF CABINET AND WALL PLASTER TO PROVIDE ACCESS FOR NEW PLUMBING SUPPLY LINE TO SINK, PATCH WALL, SEAL AROUND PLUMBING LINE, INSTALL NEW BACK PANEL AND BOTTOM SHELF TO BASE CABINET.
- 3 REMOVE VERTICAL SECTION OF WALL FLOOR TO CEILING, TO ALLOW REMOVAL AND REPLACEMENT OF PLUMBING SUPPLY LINES TO 2ND FLOOR, PATCH WALL & FINISH TO MATCH EXISTING.
- 4 REMOVE MOP SINK AND VERTICAL SECTION OF WALL TO ALLOW REMOVAL AND REPLACEMENT OF PLUMBING SUPPLY LINES, PATCH WALL AND FINISH TO MATCH EXISTING SURFACES, REPLACE MOP SINK.
- 5 REMOVE 12" WIDE SECTION OF CERAMIC TILE AND G.W.B. (GYPSUM WALL BOARD) TO PROVIDE ACCESS FOR NEW PLUMBING SUPPLY LINE TO WATER CLOSET, INSTALL NEW G.W.B. AND CERAMIC TILE, SEAL AROUND PLUMBING, MATCH EXISTING CERAMIC TILE.
- 6 REMOVE 12" WIDE SECTION OF CERAMIC AND G.W.B. FROM BELOW SINK DOWN TO FLOOR TO PROVIDE ACCESS FOR NEW PLUMBING LINES, INSTALL NEW G.W.B. AND CERAMIC TILE, SEAL AROUND PLUMBING LINES, MATCH EXISTING CERAMIC TILE.
- 7 REMOVE 12" WIDE, DOWN TO FLOOR, SECTION OF CERAMIC TILE AND G.W.B. TO PROVIDE ACCESS FOR INSTALLATION OF NEW PLUMBING LINES TO VANITY SINK, AS REQUIRED FOR EACH SINK.
- 8 REMOVE URINAL AND 12" WIDE SECTION OF CERAMIC TILE AND G.W.B. TO PROVIDE ACCESS FOR NEW PLUMBING SUPPLY LINE TO URINAL, INSTALL NEW G.W.B. AND CERAMIC TILE, SEAL AROUND PLUMBING, MATCH EXISTING CERAMIC TILE, RE-INSTALL URINAL.
- 9 REMOVE 18" WIDE SECTION OF G.W.B. AND CERAMIC TILE FROM PLUMBING FIXTURE DOWN TO MOP SINK TO PROVIDE ACCESS FOR INSTALLATION OF NEW PLUMBING SUPPLY LINES, INSTALL NEW G.W.B. AND CERAMIC TILE, MATCH EXISTING CERAMIC TILE & REPAINT EAST WALL-MATCH EXISTING.
- 10 REMOVE SECTION OF CEILING TO ALLOW REMOVAL AND REPLACEMENT OF PLUMBING SUPPLY LINES, PATCH AND REPLACE CEILING, MATCH EXISTING.
- 11 FRAME IN VERTICAL CHASE 12" X 12" WITH ACCESS DOOR AT VALVE

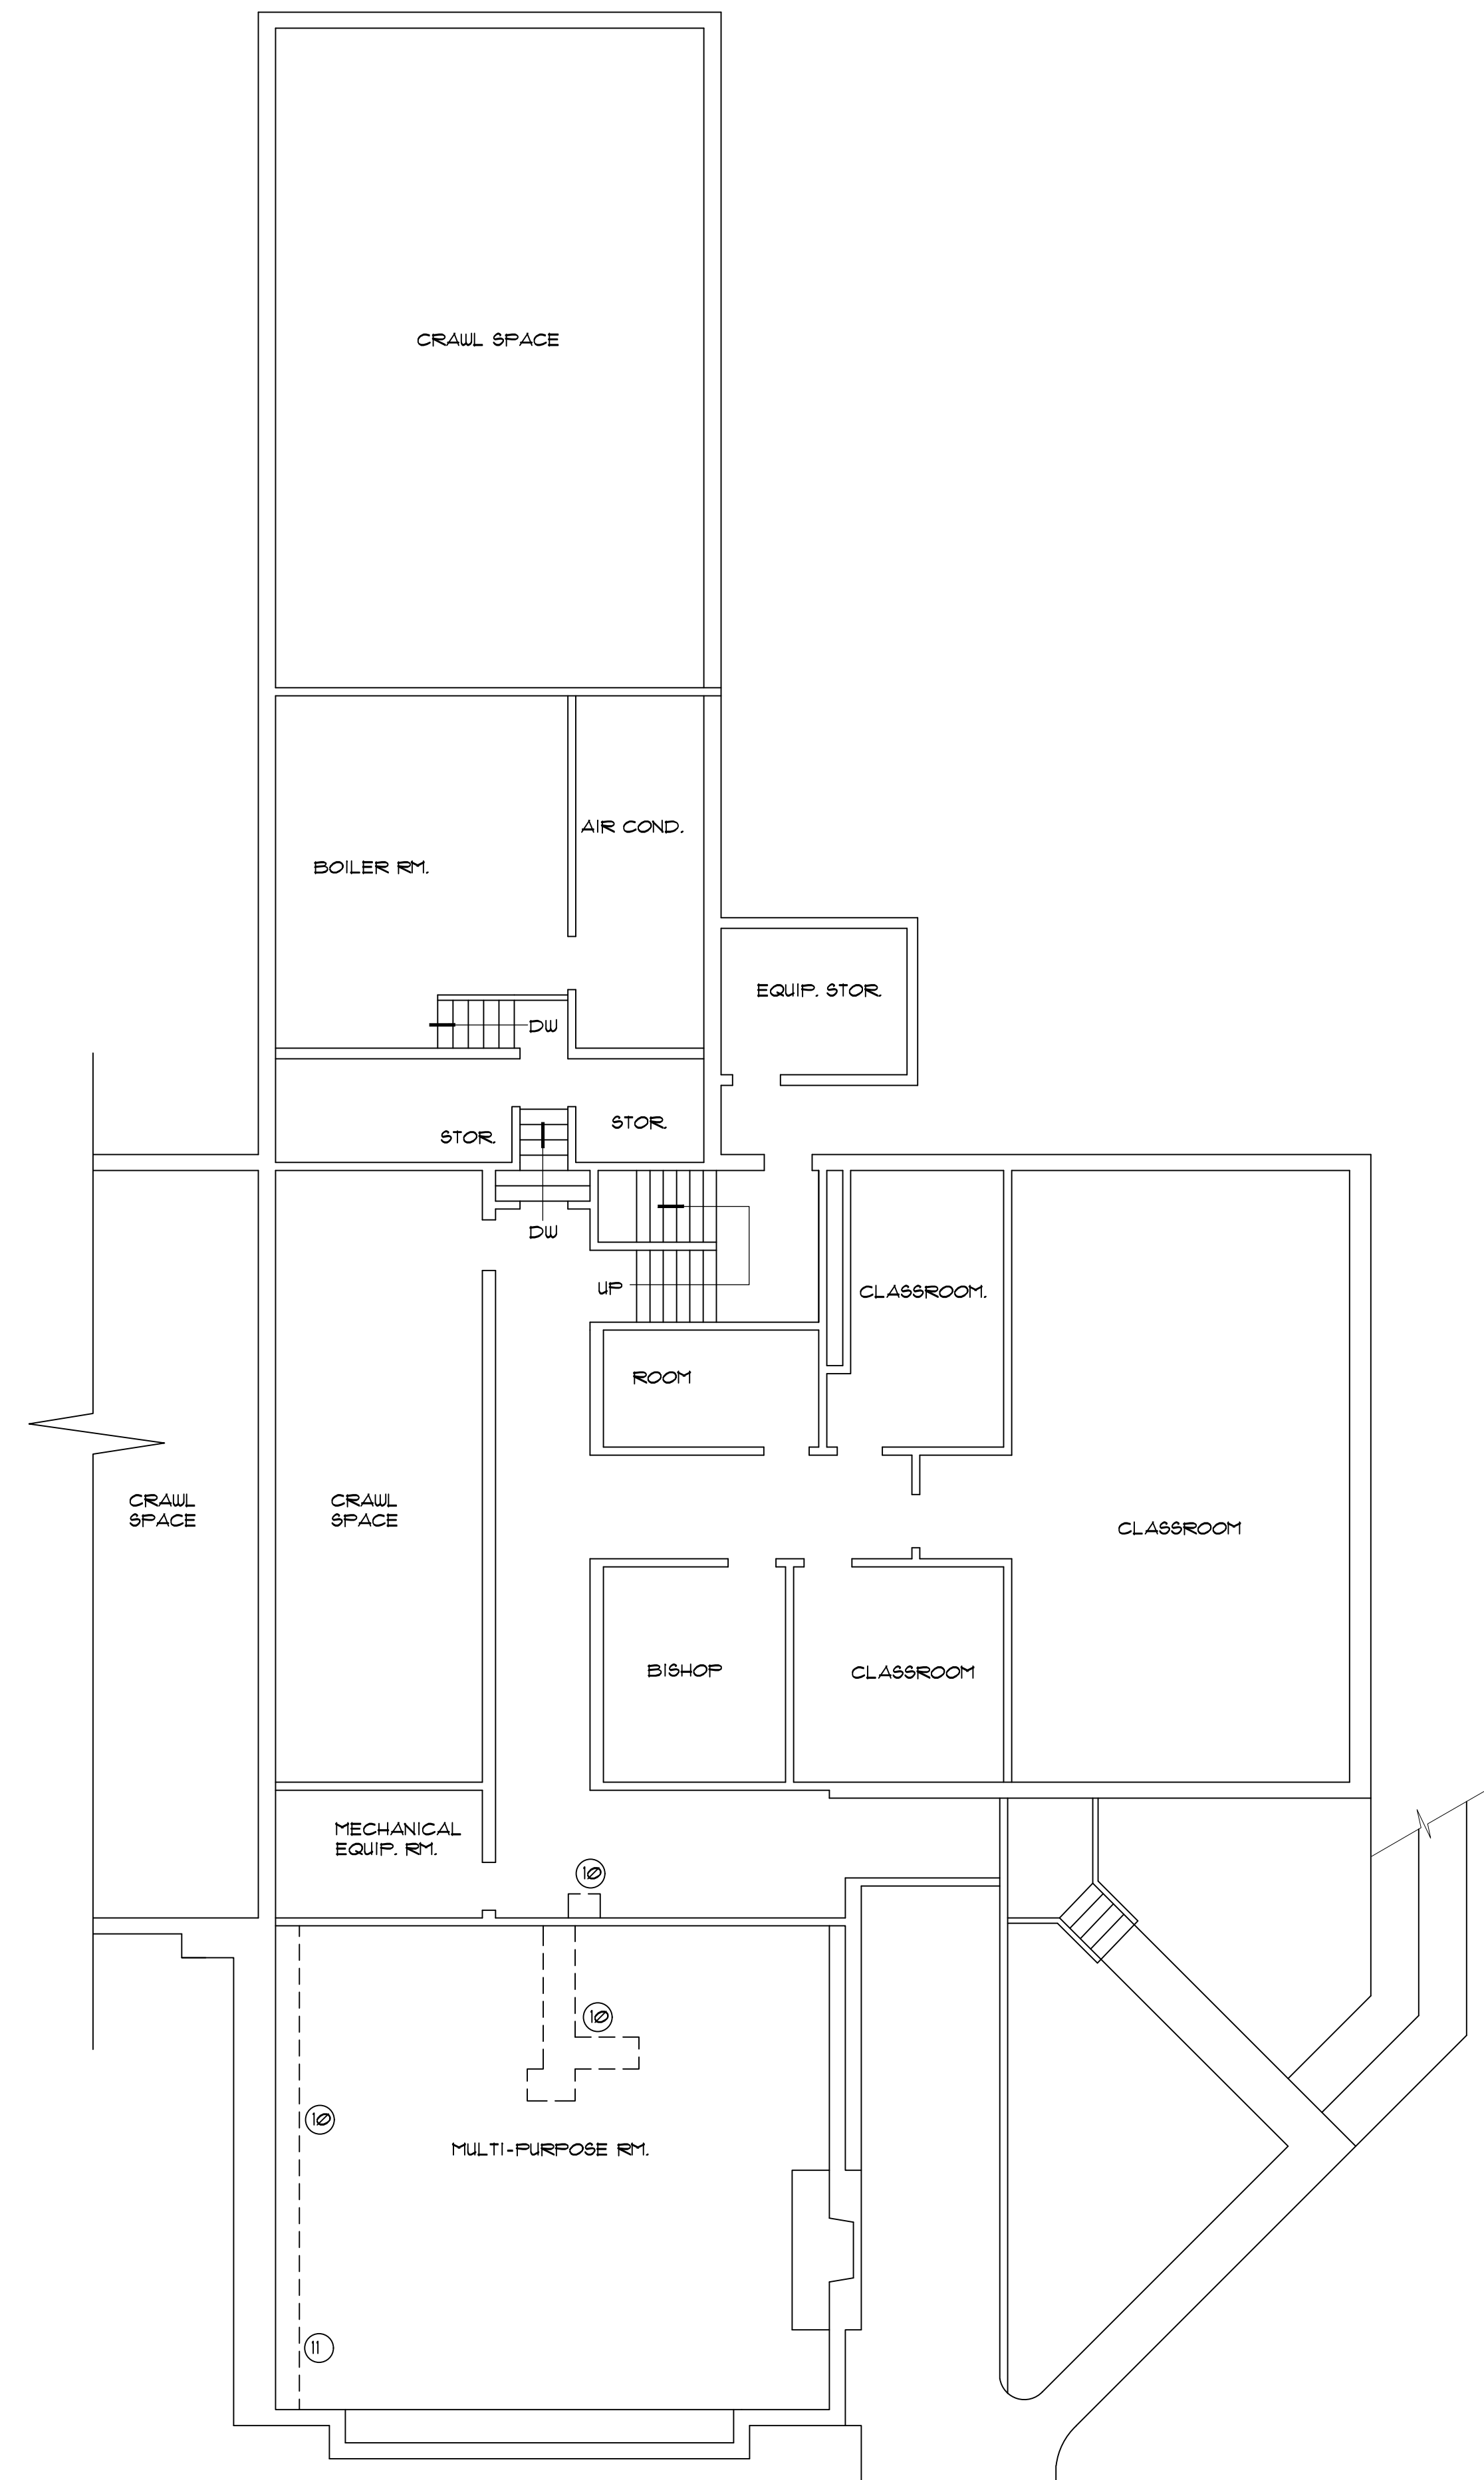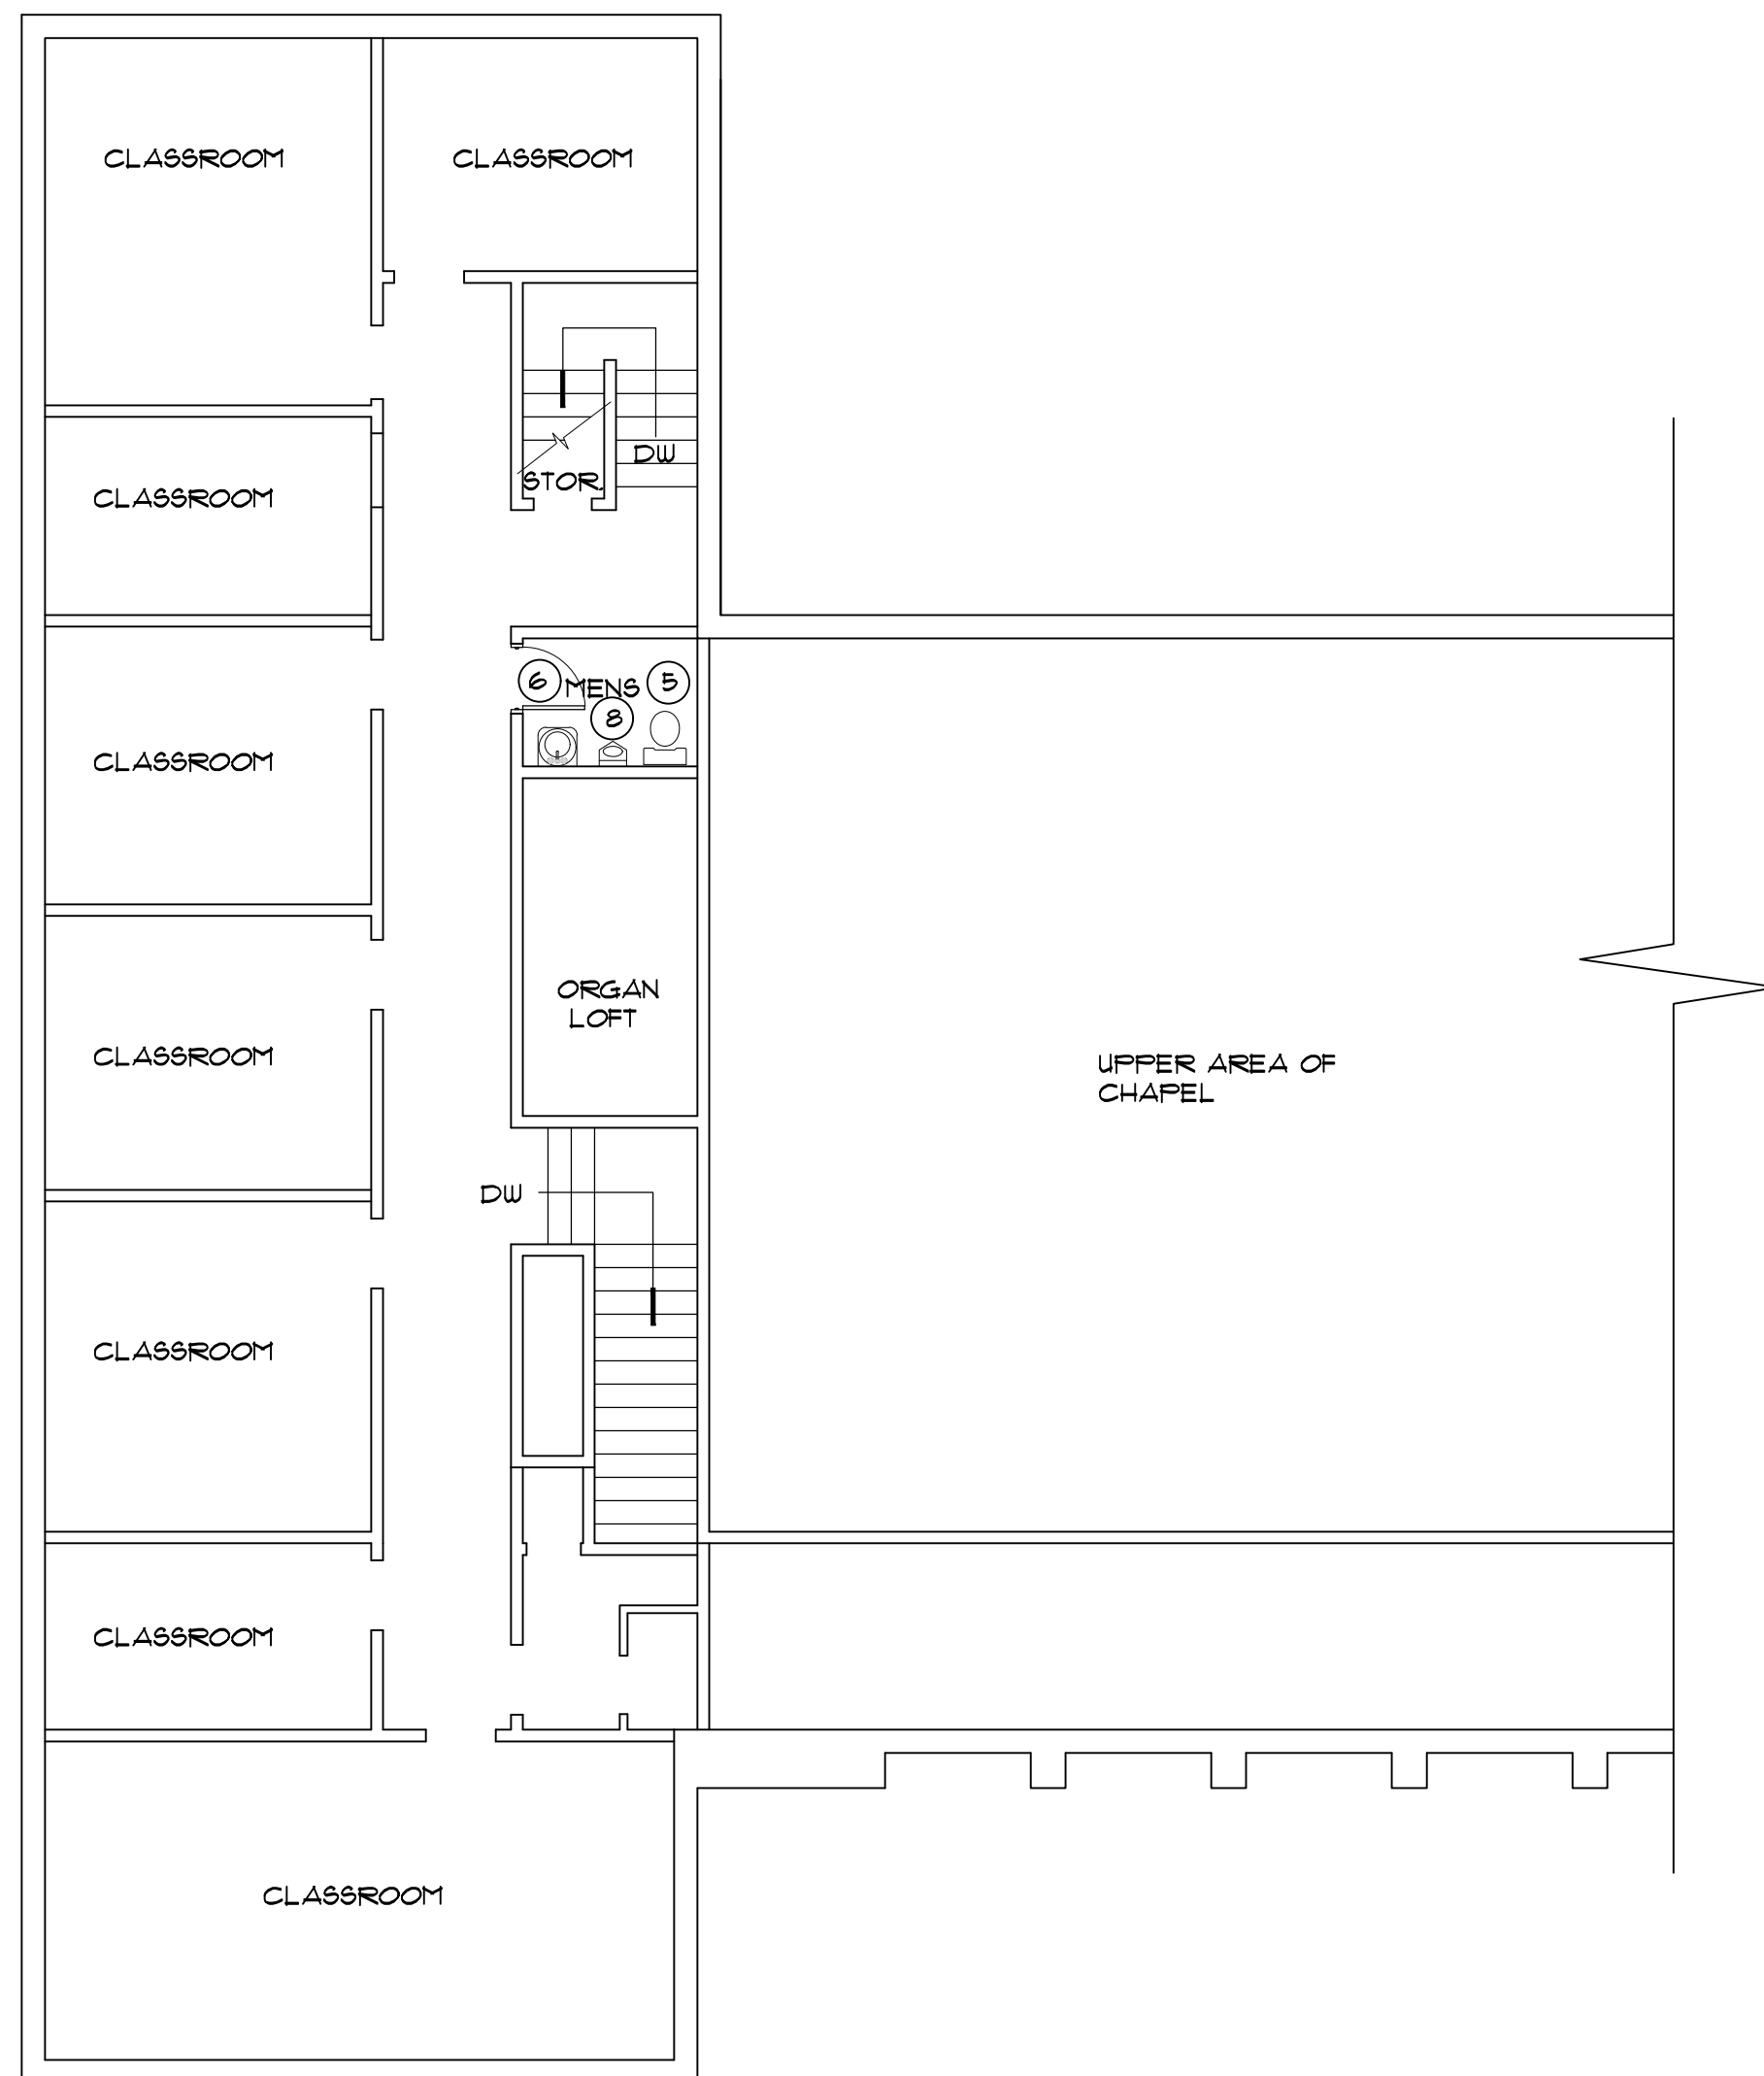

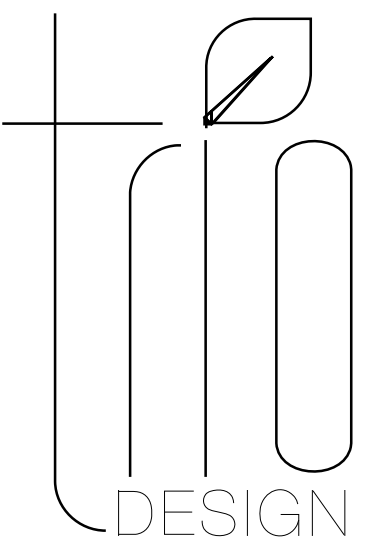

3935 west 7800 south #201
west jordan, ut 84088
801.417.9951
www.triodesigninc.com

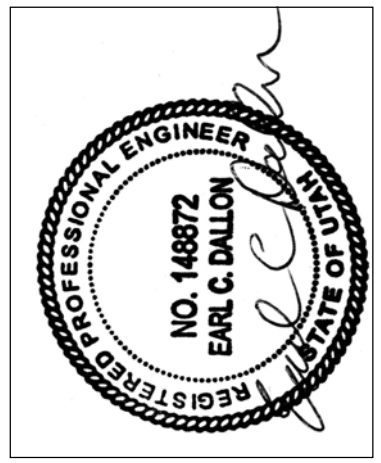

BBRUNNER & DALLON
ENGINEERING
5330 S. 900 E. #240
SALT LAKE CITY, UT 84117
801-685-8081

PROJECT NAME:

MONUMENT PARK, PRINCETON (Bldg. 22)
MONUMENT PARK STAKE
1005 S. 2000 E. SALT LAKE CITY, UTAH

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

REVISIONS:

Date:
APRIL 28, 2017

Plan Series:

Property Number:
506-8525

Sheet Title:


MAIN & UPPER
FLOOR PLUMBING
PLAN

Sheet No.:


P.1

PIPING KEYNOTES

SYMBOL	NOTE
⑦	EXISTING HOSE BIB TO REMAIN.
⑨	INSTALL NEW 1/2" RISERS UP TO FIXTURE. PROVIDE NEW STOPS AND SUPPLIES AND CONNECT TO FIXTURES. BLENDING VALVE BELOW LAVATORIES ON HOT WATER.
⑩	EXISTING COPPER PIPING, STOPS AND SUPPLIES TO REMAIN. INSTALL WATTS 1/2" USG-B-M1 TEMPERING VALVE BELOW LAVATORIES IN HOT WATER SUPPLY.
⑭	PROVIDE AND INSTALL NEW 10 GALLON ELECTRIC WH-2. MOUNT ON WALL ABOVE JANITOR SINK. SECURE PER MANUFACTURES INSTALLATION INSTRUCTIONS. PROVIDE EXPANSION TANK. SET TEMPERATURE AT 140 F.
⑮	3/4" CW & 1/2" HW TO RISE IN WALL FROM BELOW. OFFSET IN WALL AND CONNECT NEW STOPS AND SUPPLIES TO FIXTURES. INSTALL BLENDING VALVE UNDER LAVATORY.
⑯	3/4" CW & HW TO RISE IN WALL FROM BELOW. CONNECT TO WH-2 AND FIXTURES. NEW STOP AND SUPPLY TO TOILET. BALL VALVE AT WH-2.

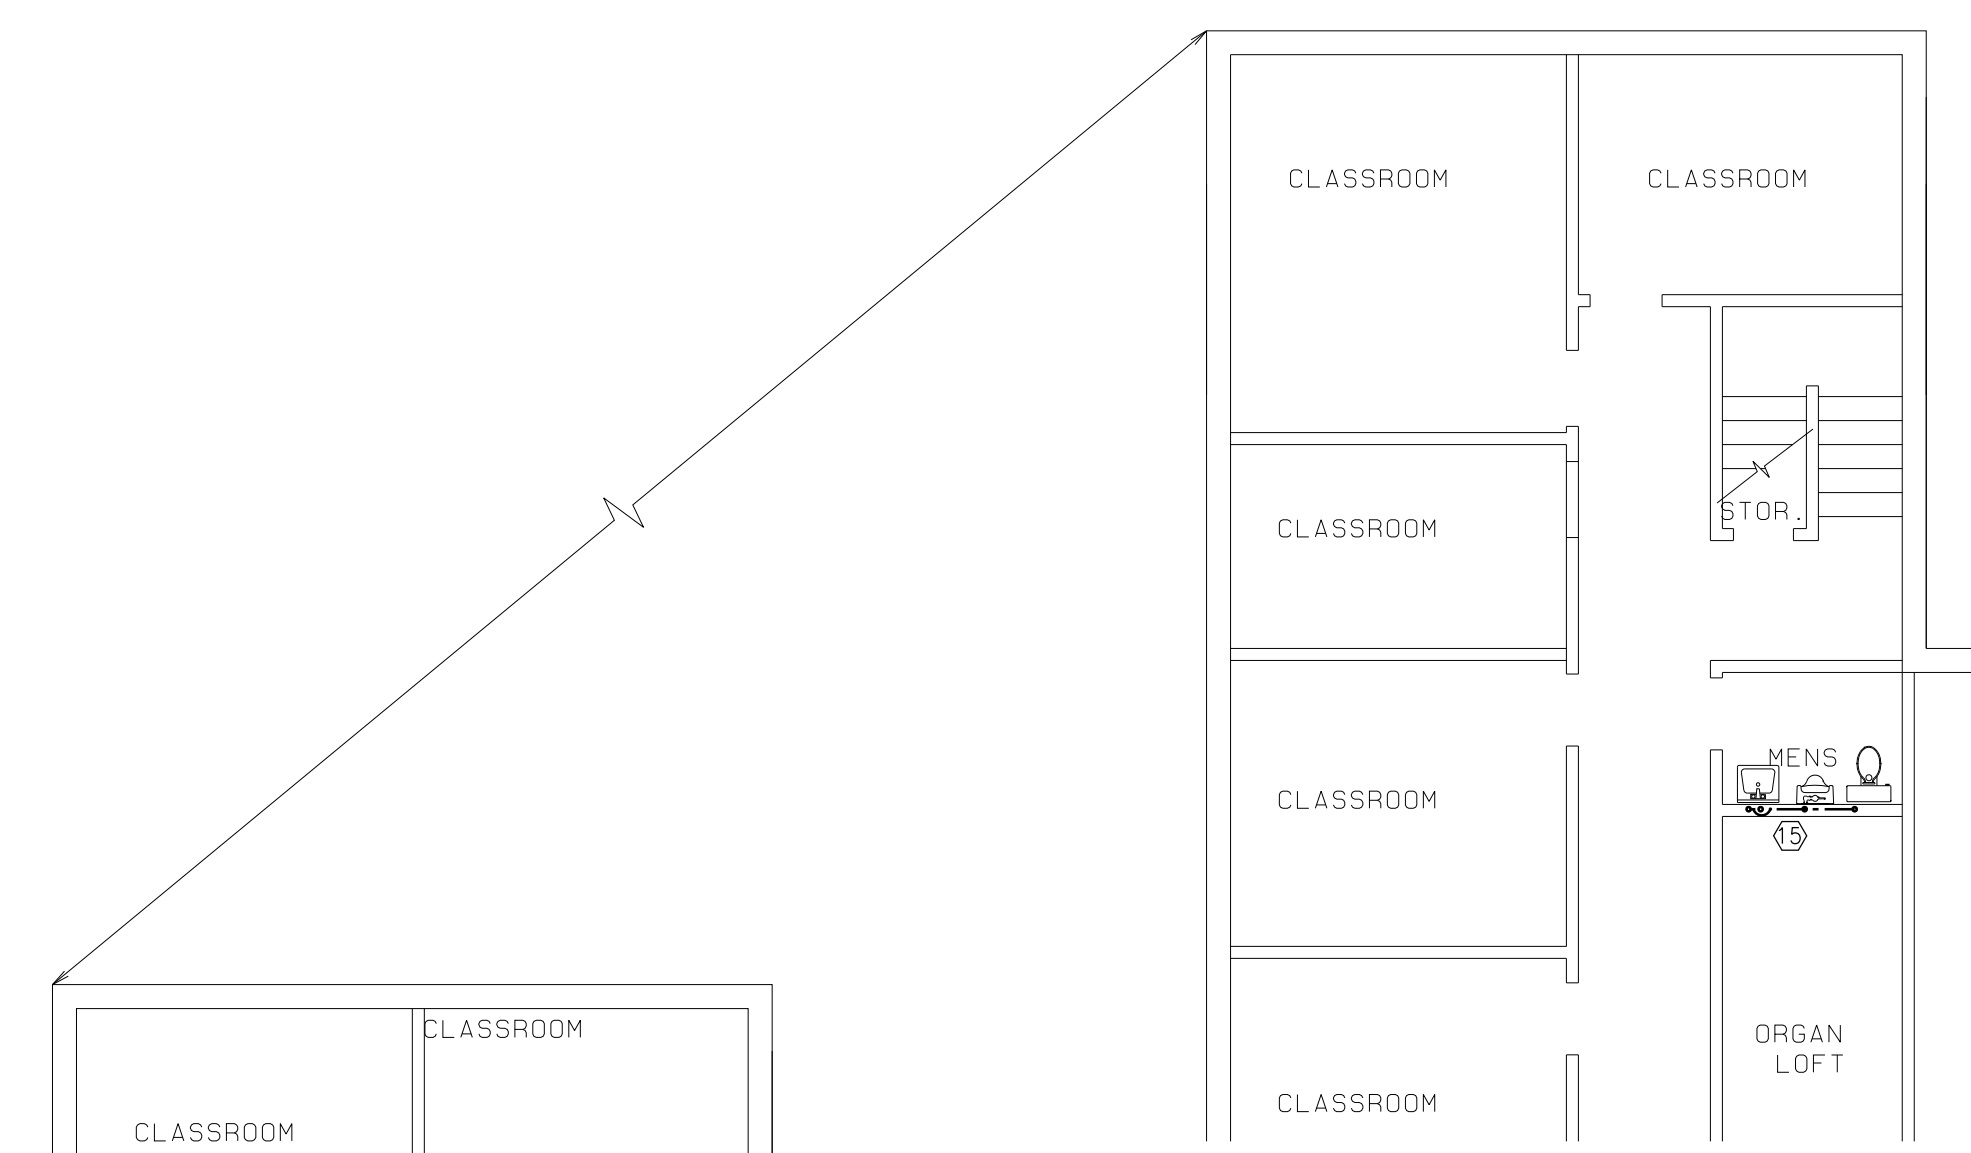

UPPER FLOOR PLUMBING PLAN
SCALE:
1/8"=1'-0"

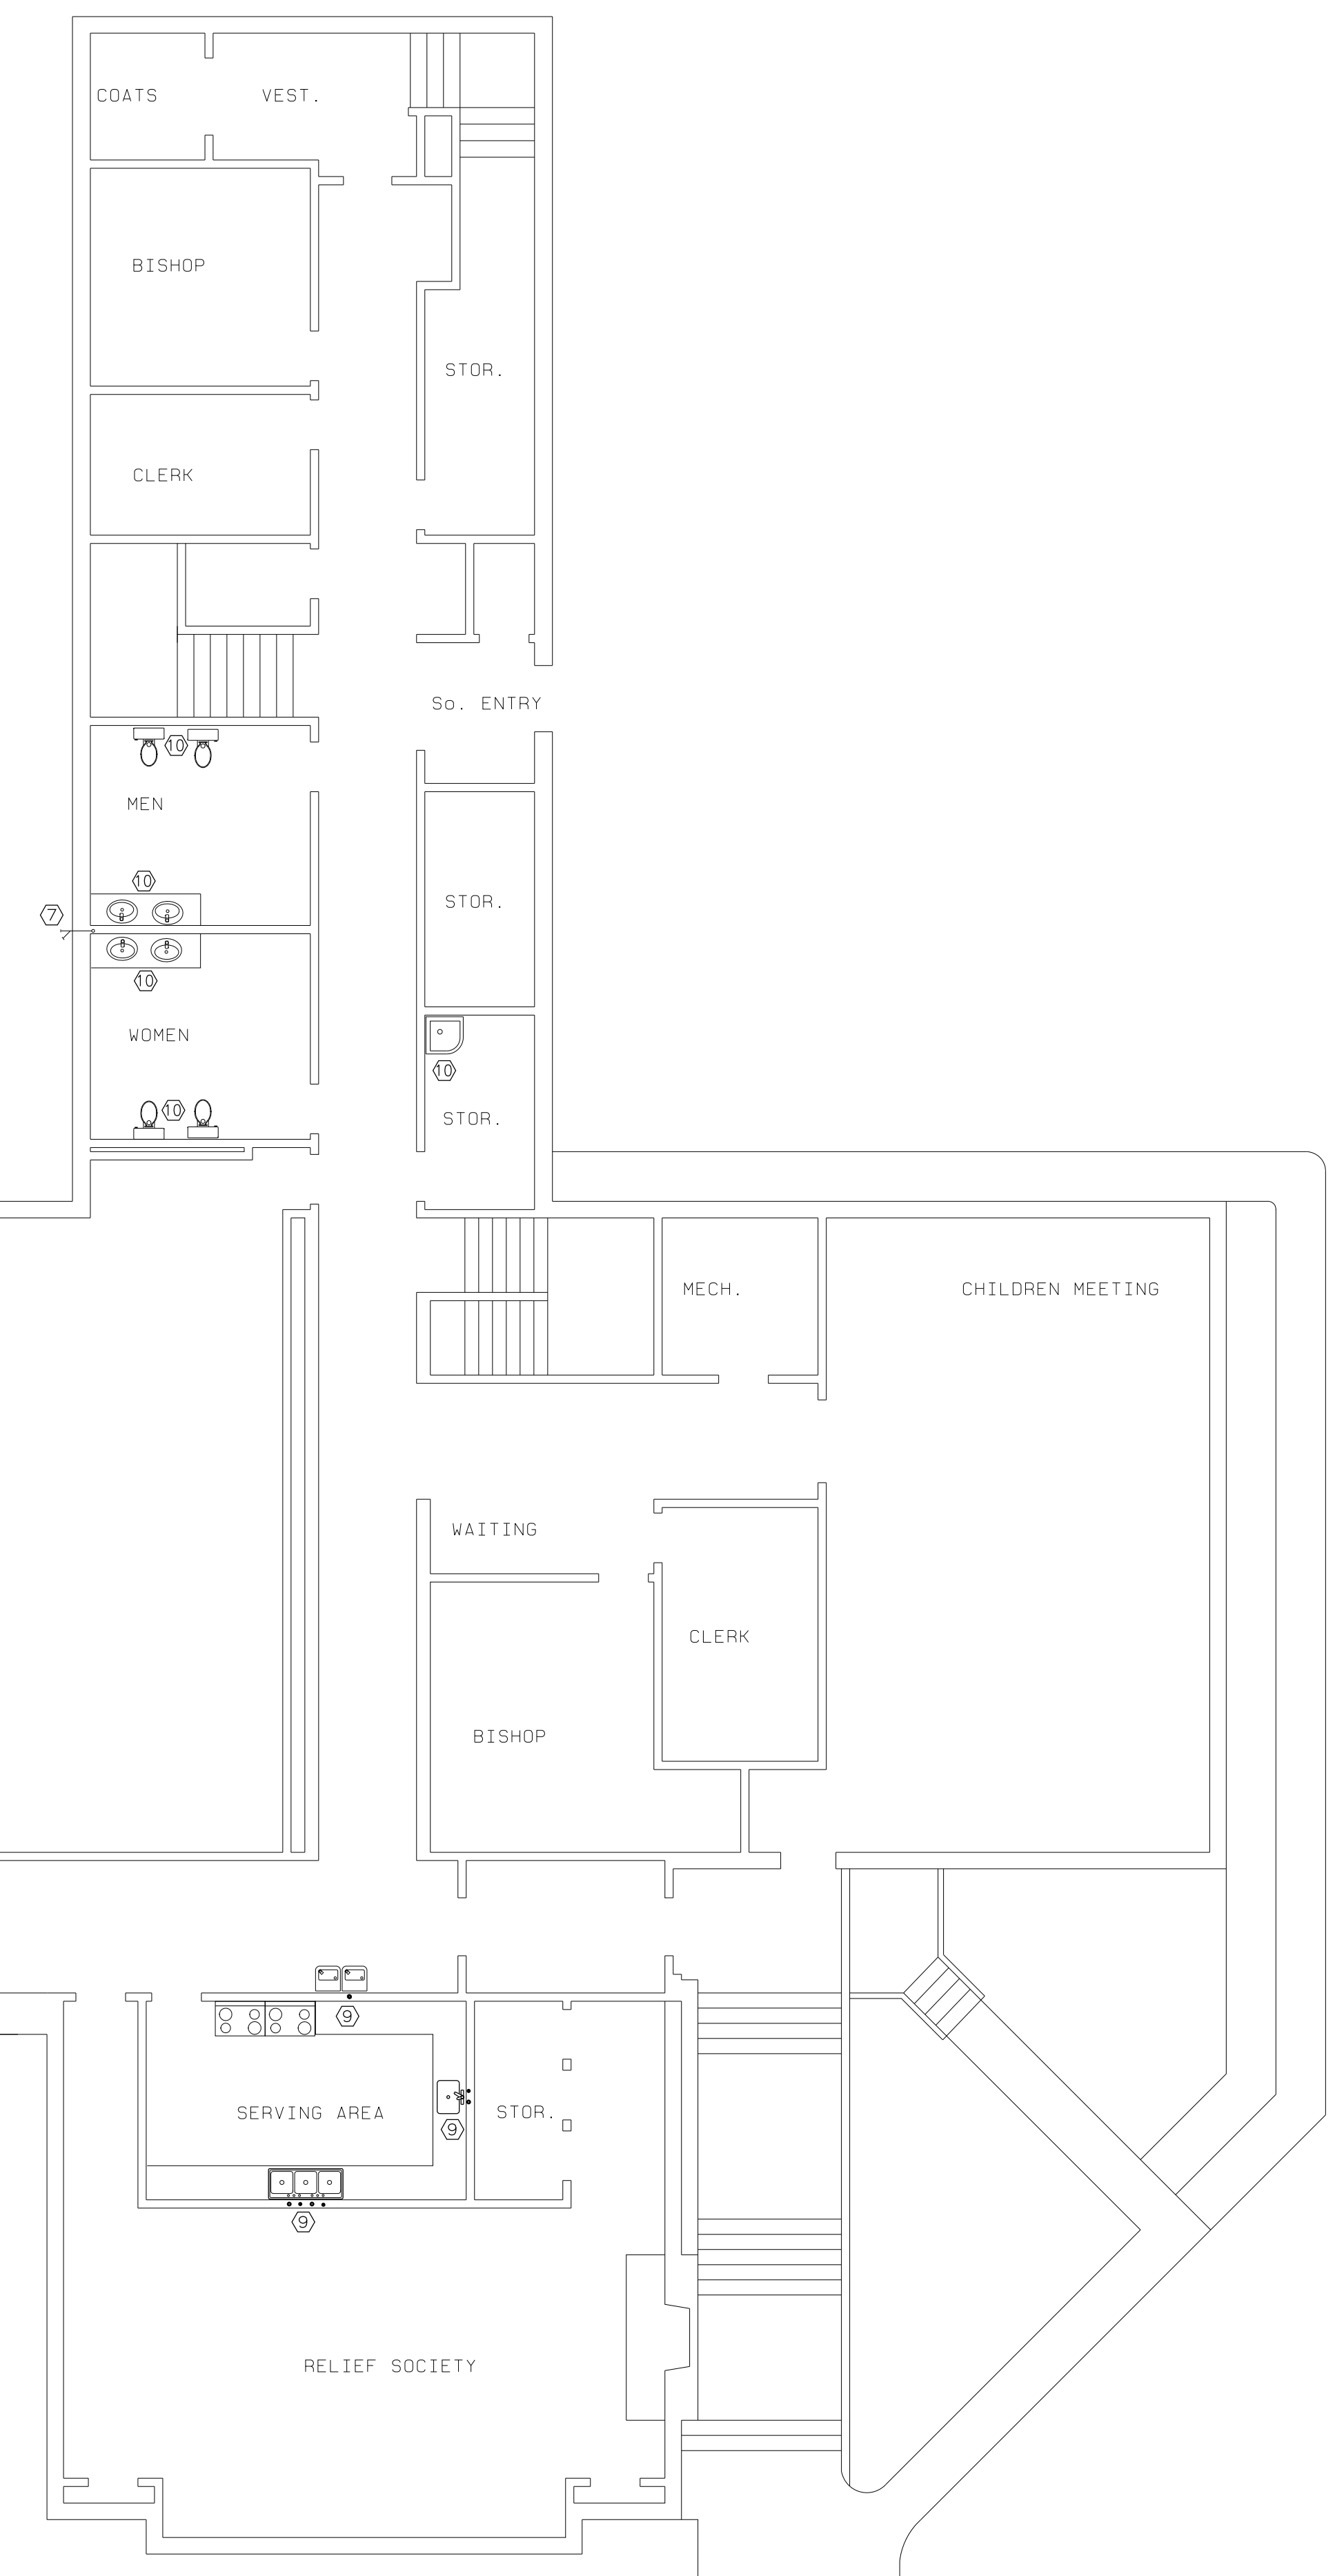

MAIN FLOOR PLUMBING PLAN
SCALE:
1/8"=1'-0"

SCOPE OF WORK:


1. REPLACE ALL GALVANIZED CULINARY WATER PIPING SERVING THE BUILDING, FROM EXISTING 2" METER TO BUILDING AND WITHIN THE BUILDING.
2. REMOVE ALL ABANDONED PIPING THAT CAN BE REMOVED WITHOUT ADDITIONAL DEMOLITION OF FLOORS, WALLS, OR CEILINGS.
3. REPLACE STOPS AND SUPPLIES FOR ALL FIXTURES. REMOVE EXISTING FIXTURES AS REQUIRED TO ALLOW SUPPLY PIPING TO BE REPLACED AND REPLACE FIXTURES AFTER WALLS ARE REPAIRED BY GENERAL CONTRACTOR.
4. REPLACE EXTERIOR HOSE BIBS AS NOTED. PROVIDE ISOLATION VALVES AT BRANCH FROM MAIN. SEAL PIPING THRU EXTERIOR FOUNDATION WALL. GROUT NEW FIXTURE IN PLACE. EXTERIOR WALL FINISH TO BE REPAIRED BY GENERAL CONTRACTOR.
5. REPLACE EXISTING GAS HOT WATER HEATER LOCATED IN BOILER ROOM. INSTALL NEW ELECTRIC WATER HEATER IN MAIN LEVEL JANITOR CLOSEST.
6. REPIPE EXISTING CONDENSOR WATER FILL SYSTEM, REPLACING GALVANIZED PIPE, WITH COPPER OR BRASS. REUSE EXISTING STRAINER, RP BACKFLOW, PRV & SOLENOID VALVE. REPLACE BALL VALVES.
7. IRRIGATION SYSTEM IS NOT IN CONTRACT, EXCEPT FOR RECONNECTION OF IRRIGATION MAIN TO NEW SERVICE LINE FROM METER TO BUILDING, AND REPAIR OF ANY IRRIGATION SYSTEM DAMAGED OR DISTURBED BY MAIN LINE EXCAVATION AND REPLACEMENT.
8. INSTALL 1/2" WATTS USG-B-M1 BLENDING VALVE UNDER EACH LAVATORY. ADJUST TO DELIVER 110F HOT WATER TO EACH LAVATORY FAUCET. EQUAL ASSE 1016 & 1070 LISTED BY PRIOR APPROVAL.
9. BUILDING IS OCCUPIED. WORK MUST BE SCHEDULED THRU FM GROUP AND WATER SERVICE TO IRRIGATION SYSTEM AND ESSENTIAL INTERIOR FIXTURES MAINTAINED TO PROTECT LANDSCAPING. ALLOW OPERATION OF MECHANICAL SYSTEM AND ALLOW USE OF BUILDING DURING SCHEDULED HOURS OF OCCUPANCY.

DRAWING NOTES:

1. BUILDING CONTAINS STEAM AND CONDENSATE PIPING THAT IS NOT TO BE DISTURBED.
2. EXACT ROUTING OF EXISTING PIPING IS NOT KNOWN. CONTRACTOR WILL NEED TO VERIFY ROUTING OF EXISTING PIPING. NEW PIPING MAY FOLLOW ROUTING OF EXISTING PIPING AND REUSE EXISTING HANGERS WERE POSSIBLE. ADJUST ROUTING OF NEW PIPING TO MINIMIZE EXTENT OF REQUIRED WALL AND CEILING DEMOLITION/REPAIR.
3. PROVIDE AND INSTALL NEW STOPS AND SUPPLIES ON ALL FIXTURES HAVING NEW SUPPLY PIPING INSTALLED. EXISTING STOPS AND SUPPLIES TO REMAIN ON FIXTURES WITH EXISTING COPPER PIPING.
4. PROVIDE AND INSTALL NEW TEMPERING VALVES IN HOT WATER PIPING BELOW ALL LAVATORIES.
5. ALL FIXTURES EXCEPT WATER HEATER ARE TO BE REUSED. IF REMOVAL IS REQUIRED TO INSTALL NEW STOPS AND SUPPLY PIPING, EXERCISE CARE & STORE IN SAFE LOCATION. REINSTALL AFTER WALLS/CABINETS ARE REPAIRED.

SCOPE OF WORK:


1. REPLACE ALL GALVANIZED CULINARY WATER PIPING SERVING THE BUILDING, FROM EXISTING 2" METER TO BUILDING AND WITHIN THE BUILDING.
2. REMOVE ALL ABANDONED PIPING THAT CAN BE REMOVED WITHOUT ADDITIONAL DEMOLITION OF FLOORS, WALLS, OR CEILINGS.
3. REPLACE STOPS AND SUPPLIES FOR ALL FIXTURES. REMOVE EXISTING FIXTURES AS REQUIRED TO ALLOW SUPPLY PIPING TO BE REPLACED AND REPLACE FIXTURES AFTER WALLS ARE REPAIRED BY GENERAL CONTRACTOR.
4. REPLACE EXTERIOR HOSE BIBS AS NOTED. PROVIDE ISOLATION VALVES AT BRANCH FROM MAIN. SEAL PIPING THRU EXTERIOR FOUNDATION WALL, GROUT NEW FIXTURE IN PLACE. EXTERIOR WALL FINISH TO BE REPAIRED BY GENERAL CONTRACTOR.
5. REPLACE EXISTING GAS HOT WATER HEATER LOCATED IN BOILER ROOM. INSTALL NEW ELECTRIC WATER HEATER IN MAIN LEVEL JANITOR CLOSEST.
6. REPIPE EXISTING CONDENSOR WATER FILL SYSTEM, REPLACING GALVANIZED PIPE, WITH COPPER OR BRASS. REUSE EXISTING STRAINER, RP BACKFLOW, PRV & SOLENOID VALVE. REPLACE BALL VALVES.
7. IRRIGATION SYSTEM IS NOT IN CONTRACT, EXCEPT FOR RECONNECTION OF IRRIGATION MAIN TO NEW SERVICE LINE FROM METER TO BUILDING, AND REPAIR OF ANY IRRIGATION SYSTEM DAMAGED OR DISTURBED BY MAIN LINE EXCAVATION AND REPLACEMENT.
8. INSTALL 1/2" WATTS USC-B-M1 BLENDING VALVE UNDER EACH LAVATORY. ADJUST TO DELIVER 110F HOT WATER TO EACH LAVATORY FAUCET. EQUAL ASSE 1016 & 1070 LISTED BY PRIOR APPROVAL.
9. BUILDING IS OCCUPIED. WORK MUST BE SCHEDULED THRU FM GROUP AND WATER SERVICE TO IRRIGATION SYSTEM AND ESSENTIAL INTERIOR FIXTURES MAINTAINED TO PROTECT LANDSCAPING. ALLOW OPERATION OF MECHANICAL SYSTEM AND ALLOW USE OF BUILDING DURING SCHEDULED HOURS OF OCCUPANCY.

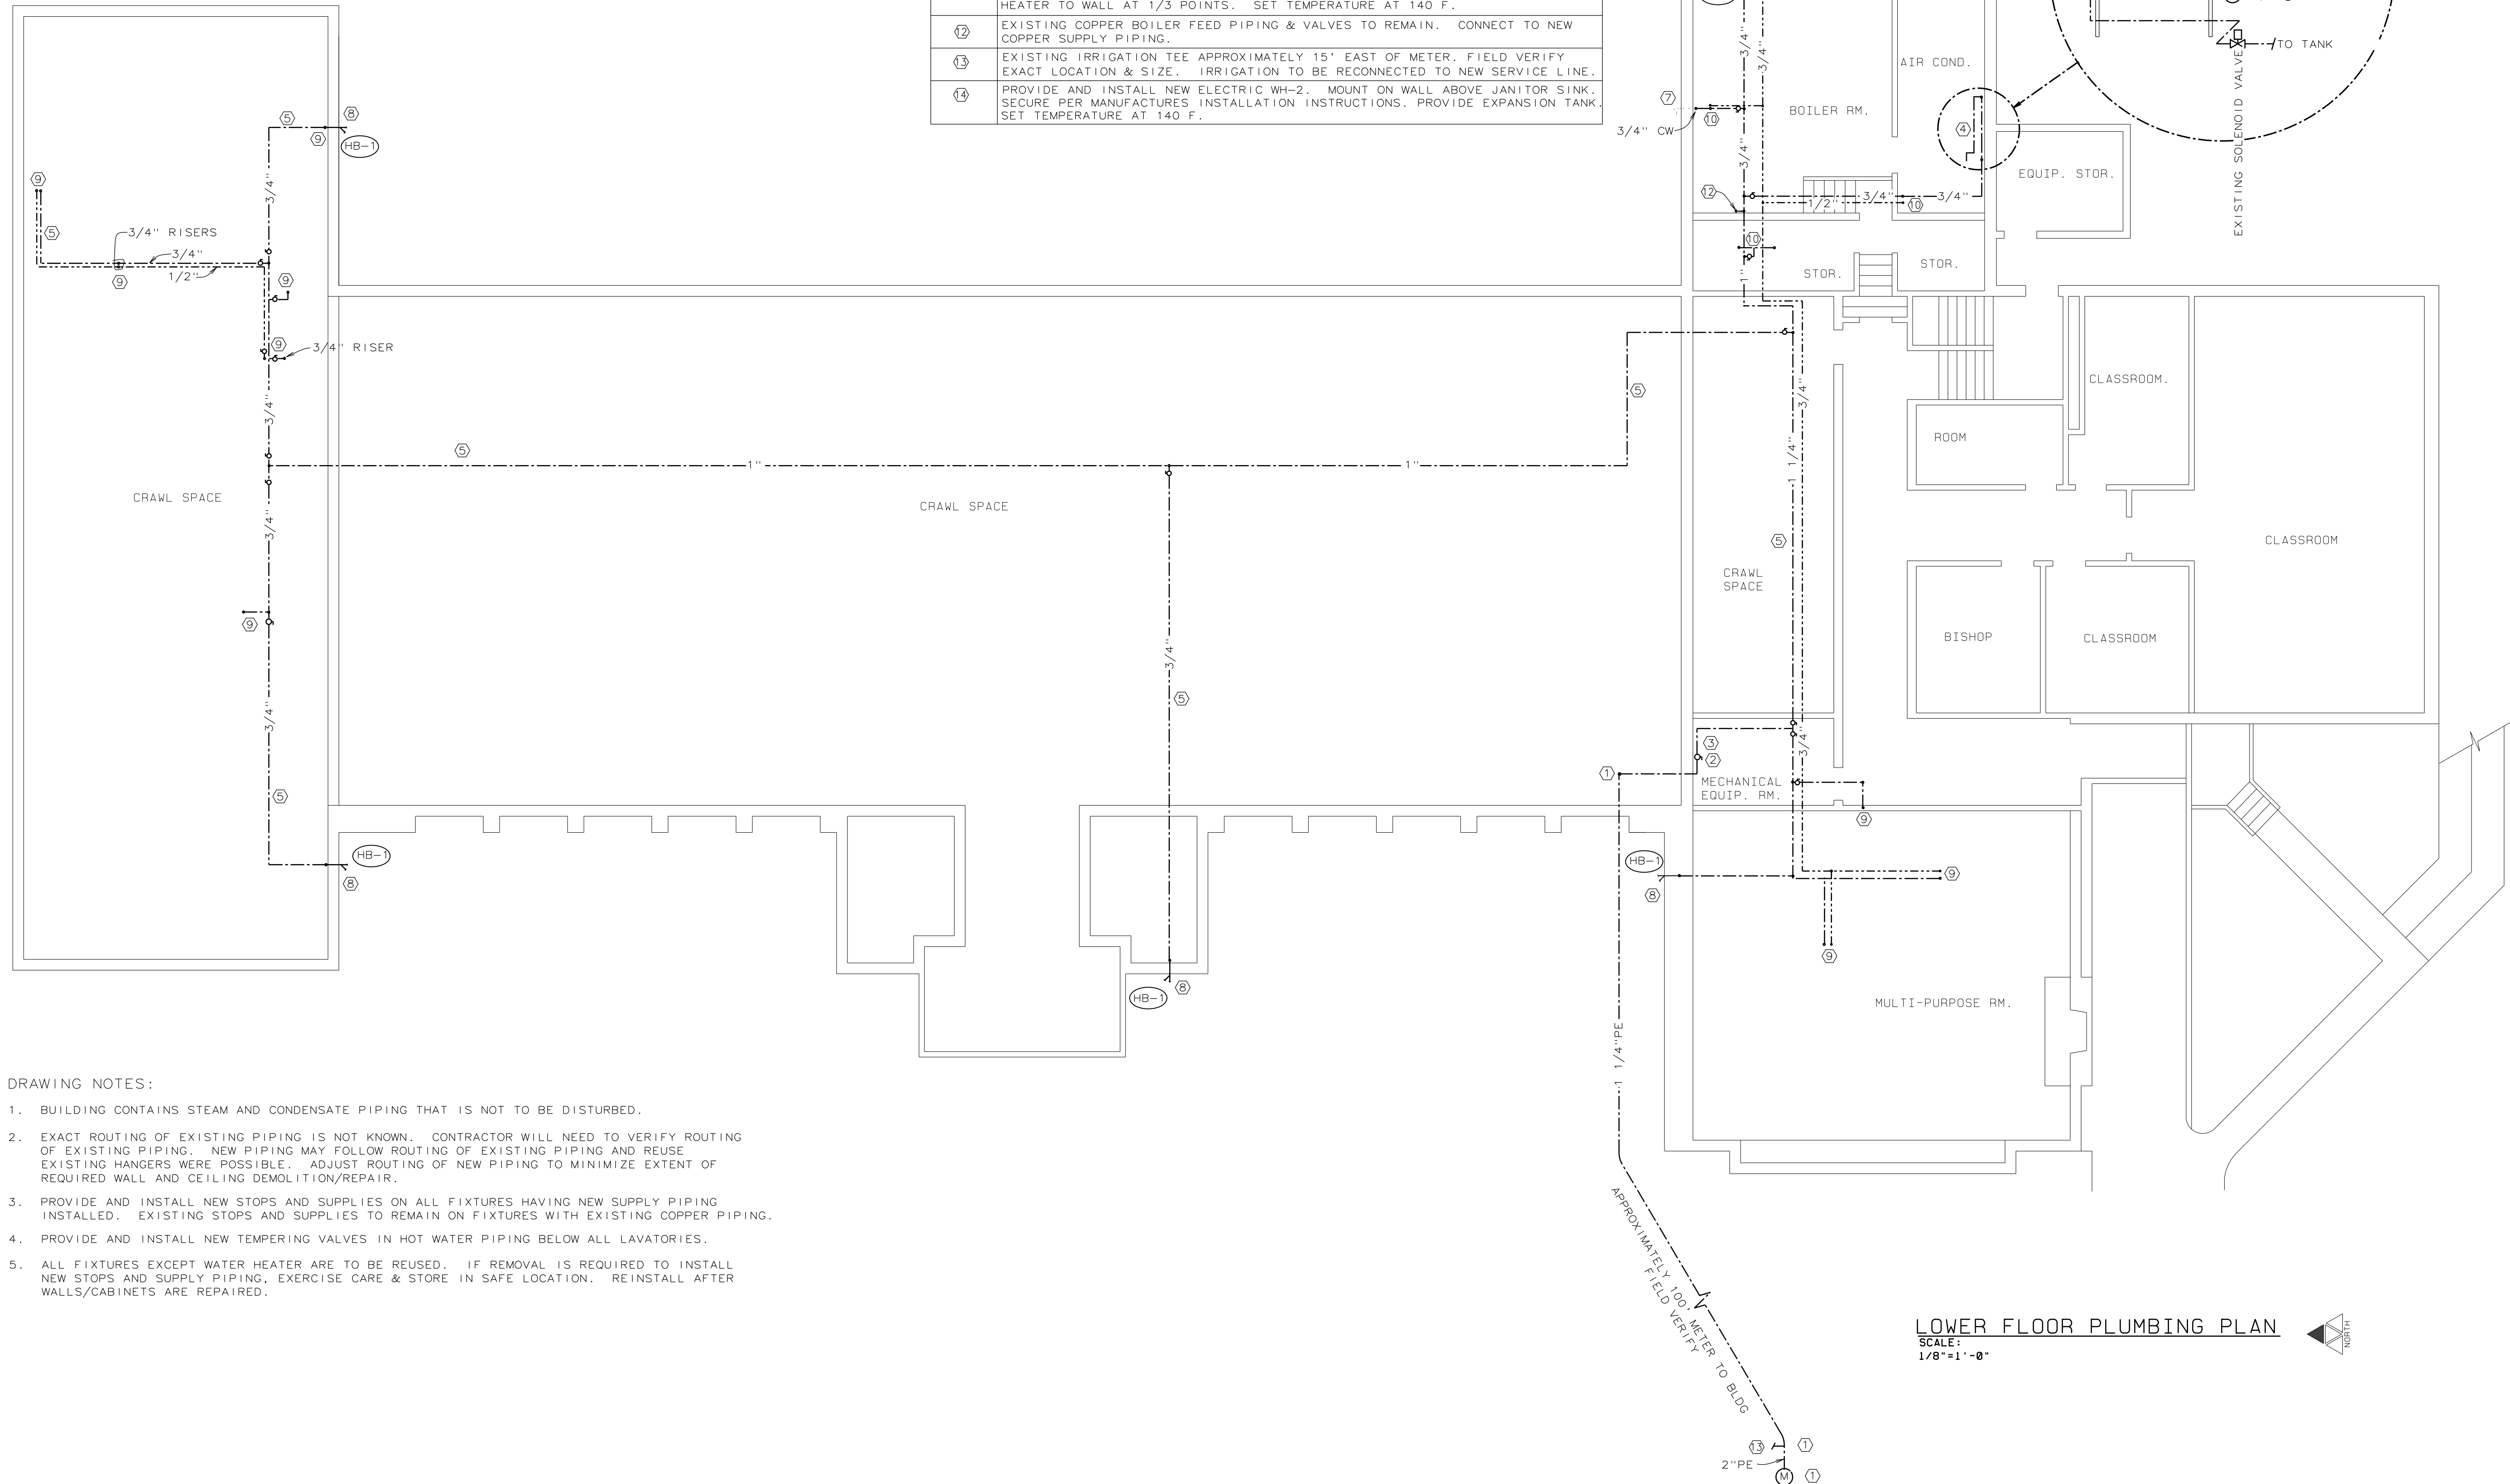


PIPING KEYNOTES	
SYMBOL	NOTE
①	REPLACE EXISTING 2" GALVANIZED SERVICE LINE FROM METER TO IRRIGATION TEE. WITH NEW 2" PE PIPE. ROUTE NEW 1-1/4" PE PIPE FROM TEE TO BUILDING. TRANSITION TO RIGID COPPER, RUN THRU FOUNDATION WALL AND RISE IN CRAWL SPACE. ROUTE TO MINIMIZE DAMAGE TO LANDSCAPE AND IRRIGATION SYSTEM.
②	EXTEND NEW 1-1/4" COPPER THRU OPENING WALL INTO MECHANICAL EQUIPMENT ROOM AND INSTALL FULL PORT BALL VALVE ABOVE CONDENSATE PUMP.
③	EXTEND NEW COLD WATER PIPE FROM BUILDING SHUT OFF VALVE TO ALL EXISTING FIXTURES. TO CONNECTION OF EXISTING COPPER PIPING AND OTHER POINTS OF USE AS SHOWN ON THE DRAWING.
④	REPLACE ALL EXISTING GALVANIZED PIPE IN CONDENSOR WATER FILL SYSTEM. EXISTING EQUIPMENT TO BE REPIPED WITH COPPER OR BRASS PIPE.
⑤	SUSPEND NEW COLD WATER PIPING IN CRAWL SPACE. FOLLOW ROUTING OF REMOVED GALVANIZED PIPING WHERE POSSIBLE. REUSE OF EXISTING HANGERS IS PERMITTED. PROVIDE ADDITIONAL HANGERS AS REQUIRED FOR NEW PIPE INSTALLED.
⑥	SUSPEND NEW WATER PIPING ABOVE FINISHED CEILING. ROUTE PIPING TO MINIMIZE REQUIRED DEMOLITION AND REPAIR.
⑦	EXISTING HOSE BIB AND COPPER PIPING TO REMAIN. (ALSO SHOWN ON P.1)
⑧	INSTALL NEW HOSE BIB. GROUT IN PLACE. WALL FINISH REPAIR BY GENERAL.
⑨	INSTALL NEW RISERS UP THRU FLOOR INTO WALL OR TO FIXTURE ABOVE. FIELD VERIFY EXACT LOCATION. RISERS TO BE 1/2" UNLESS NOTED.
⑩	CONNECT TO EXISTING COPPER PIPING OR RISERS UP TO FIXTURES ABOVE. FIELD VERIFY EXACT LOCATION.
⑪	PROVIDE AND INSTALL NEW 50 GALLON WH-1. CONNECT TO EXISTING GAS AND FLUE. CONNECT TO NEW HOT & COLD WATER PIPING. PROVIDE EXPANSION TANK. SECURE HEATER TO WALL AT 1/3 POINTS. SET TEMPERATURE AT 140 F.
⑫	EXISTING COPPER BOILER FEED PIPING & VALVES TO REMAIN. CONNECT TO NEW COPPER SUPPLY PIPING.
⑬	EXISTING IRRIGATION TEE APPROXIMATELY 15' EAST OF METER. FIELD VERIFY EXACT LOCATION & SIZE. IRRIGATION TO BE RECONNECTED TO NEW SERVICE LINE.
⑭	PROVIDE AND INSTALL NEW ELECTRIC WH-2. MOUNT ON WALL ABOVE JANITOR SINK. SECURE PER MANUFACTURES INSTALLATION INSTRUCTIONS. PROVIDE EXPANSION TANK. SET TEMPERATURE AT 140 F.

DRAWING NOTES:

1. BUILDING CONTAINS STEAM AND CONDENSATE PIPING THAT IS NOT TO BE DISTURBED.
2. EXACT ROUTING OF EXISTING PIPING IS NOT KNOWN. CONTRACTOR WILL NEED TO VERIFY ROUTING OF EXISTING PIPING. NEW PIPING MAY FOLLOW ROUTING OF EXISTING PIPING AND REUSE EXISTING HANGERS WHERE POSSIBLE. ADJUST ROUTING OF NEW PIPING TO MINIMIZE EXTENT OF REQUIRED WALL AND CEILING DEMOLITION/REPAIR.
3. PROVIDE AND INSTALL NEW STOPS AND SUPPLIES ON ALL FIXTURES HAVING NEW SUPPLY PIPING INSTALLED. EXISTING STOPS AND SUPPLIES TO REMAIN ON FIXTURES WITH EXISTING COPPER PIPING.
4. PROVIDE AND INSTALL NEW TEMPERING VALVES IN HOT WATER PIPING BELOW ALL LAVATORIES.
5. ALL FIXTURES EXCEPT WATER HEATER ARE TO BE REUSED. IF REMOVAL IS REQUIRED TO INSTALL NEW STOPS AND SUPPLY PIPING, EXERCISE CARE & STORE IN SAFE LOCATION. REINSTALL AFTER WALLS/CABINETS ARE REPAIRED.

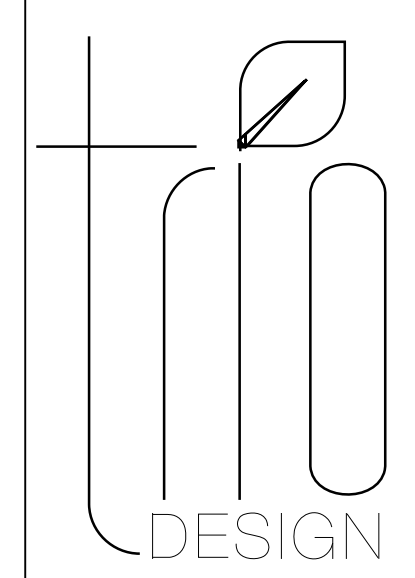

3995 west 7800 south #201
west Jordan, UT 84088
801.417.9951
www.triodesigninc.com

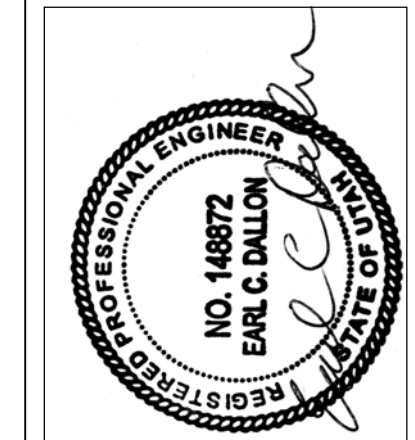

Brunner & Dallan
ENGINEERING
5330 S. 900 E. #240
SALT LAKE CITY, UT 84117
801-685-8081

PROJECT NAME:

MONUMENT PARK, PRINCETON (Bldg. 22)
MONUMENT PARK STAKE
1005 S. 2000 E. SALT LAKE CITY, UT

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

REVISIONS:

Date:
APRIL 28, 2017

Plan Series:


Property Number:
506-8525

Sheet Title:
LOWER FLOOR
PLUMBING
PLAN


Sheet No.:

P.2

LOWER FLOOR PLUMBING PLAN
SCALE:
1/8"=1'-0"

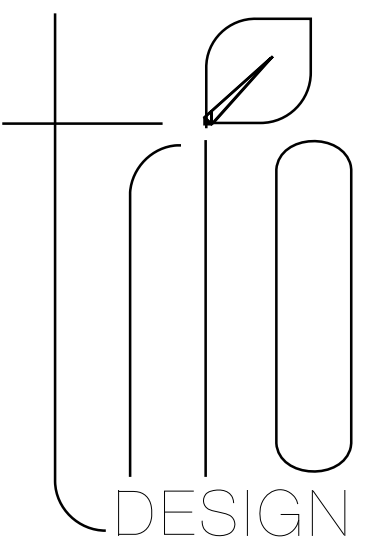

3935 west 7600 south #201
west jordan, ut 84088
801.417.9951
www.triodesigninc.com

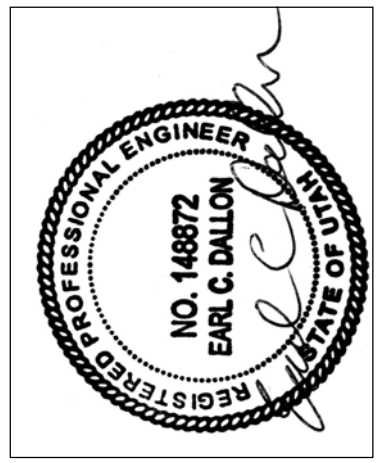

B BRUNNER & DALLON
ENGINEERING
5330 S 900 E, #240
SALT LAKE CITY, UT 84117
801 685-8081

PROJECT NAME:

MONUMENT PARK, PRINCETON (Bldg. 22)
MONUMENT PARK STAKE
1005 S. 2000 E. SALT LAKE CITY, UTAH

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

REVISIONS:

Date:
APRIL 28, 2017

Plan Series:

Property Number:
506-8525


Sheet Title:
**MAIN & UPPER
FLOOR PLUMBING
DEMO PLAN**

Sheet No.:

P.1D

DEMOLITION KEYNOTES

SYMBOL	NOTE
⑦	EXISTING HOSE BIB TO REMAIN.
⑧	EXISTING HOSE BIB TO BE REPLACED.
⑨	ESTIMATED LOCATION OF RISERS UP THRU FLOOR INTO WALL TO BE REMOVED AND REPLACED.
⑩	FIXTURE WITH EXISTING COPPER SUPPLY PIPING RISERS THAT ARE TO REMAIN.

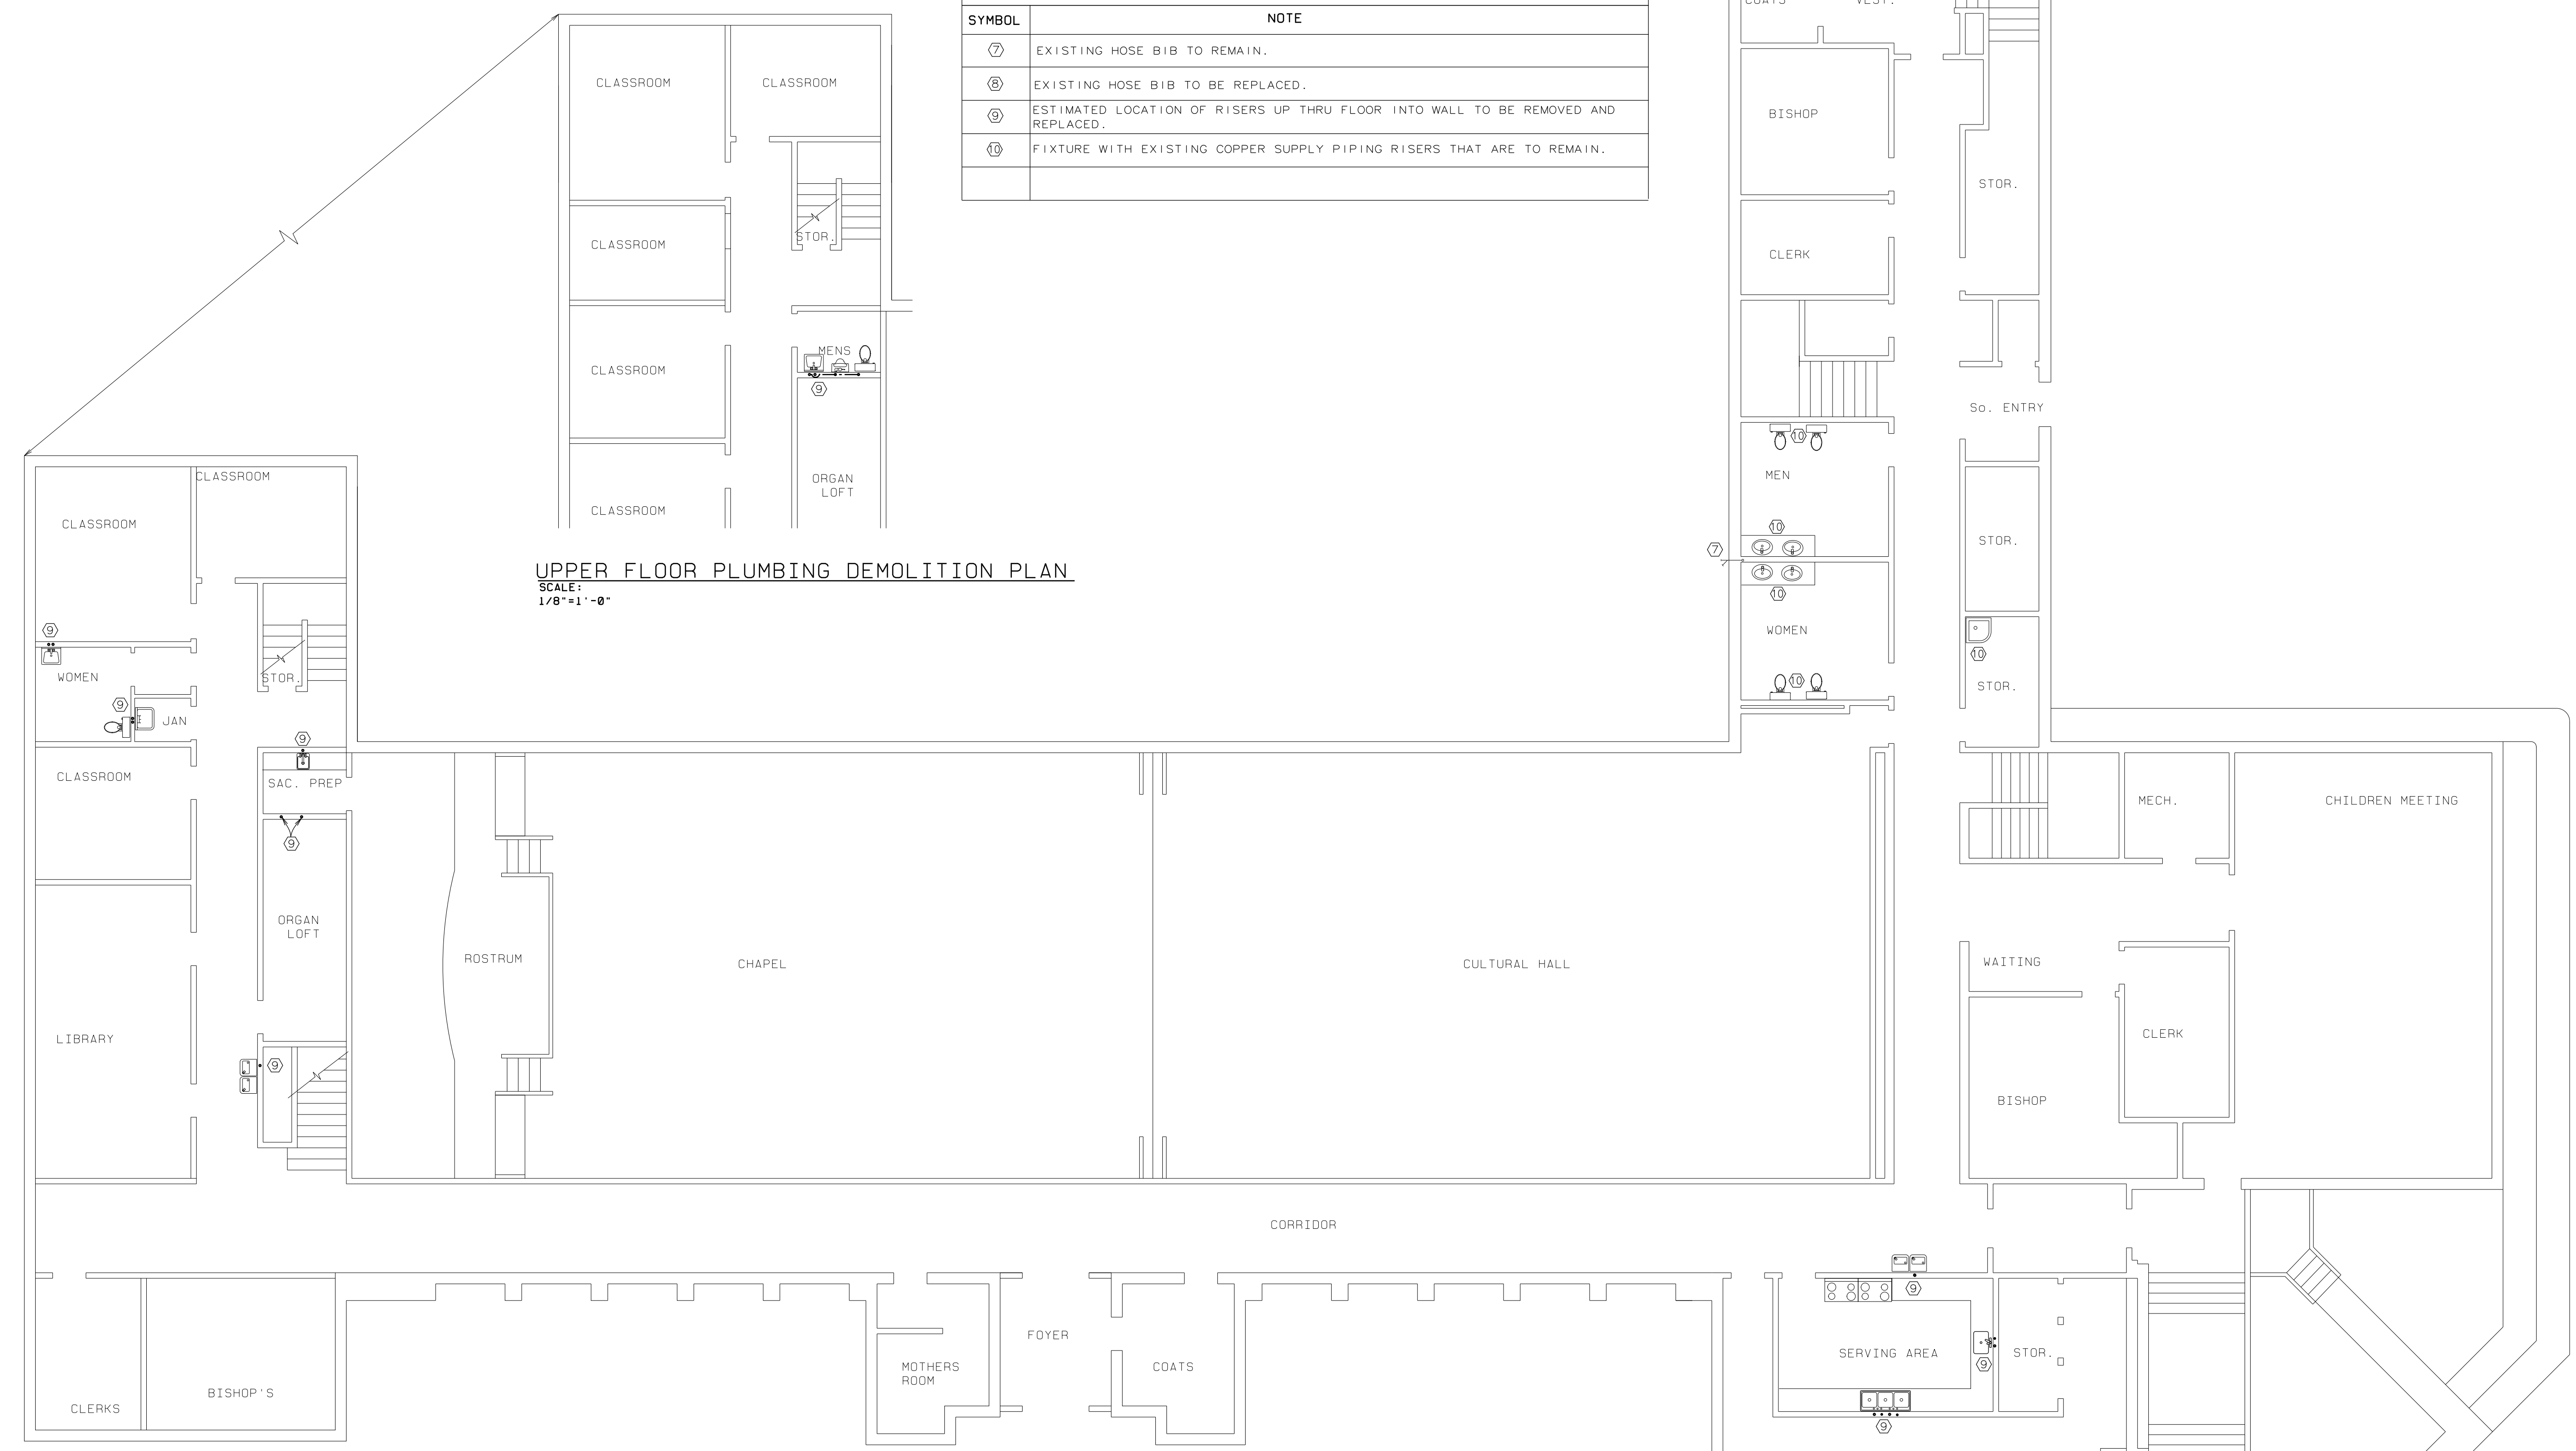

UPPER FLOOR PLUMBING DEMOLITION PLAN
SCALE:
1/8"=1'-0"

MAIN FLOOR PLUMBING DEMOLITION PLAN
SCALE:
1/8"=1'-0"

DEMOLITION NOTES:


- BUILDING CONTAINS STEAM AND CONDENSATE PIPING THAT IS NOT TO BE DISTURBED.
- EXACT ROUTING OF EXISTING PIPING IS NOT KNOWN. CONTRACTOR WILL NEED TO VERIFY SIZE, LOCATION AND ROUTING OF ALL EXISTING GALVANIZED WATER PIPE. REMOVE ALL EXISTING ACTIVE AND ABANDONED GALVANIZED WATER PIPING LOCATED IN CRAWL SPACES, BOILER ROOM AND UNFINISHED AREAS. ABANDONED PIPING IN WALLS OR ABOVE CEILINGS THAT DO NOT NEED TO BE OPENED FOR INSTALLATION OF NEW PIPING MAY BE ABANDONED IN PLACE.
- COORDINATE REQUIRED DEMOLITION OF WALLS, FLOORS & CEILINGS WITH GENERAL CONTRACTOR TO MINIMIZE REQUIRED DEMOLITION AND REPAIR.
- ALL FIXTURES EXCEPT WATER HEATER ARE TO BE REUSED. IF REMOVAL IS REQUIRED TO INSTALL NEW STOPS AND SUPPLY PIPING, EXERCISE CARE & STORE IN SAFE LOCATION. REINSTALL AFTER WALLS/CABINETS ARE REPAIRED.
- REUSE OF EXISTING PIPE HANGERS IN UTILITY AREAS IS PERMITTED. INSULATE COPPER PIPE FROM FERROUS PIPE HANGERS.

SCOPE OF WORK:

- REPLACE ALL GALVANIZED CULINARY WATER PIPING SERVING THE BUILDING, FROM EXISTING 2" METER TO BUILDING AND WITHIN THE BUILDING.
- REMOVE ALL ABANDONED PIPING THAT CAN BE REMOVED WITHOUT ADDITIONAL DEMOLITION OF FLOORS, WALLS, OR CEILINGS.
- REPLACE STOPS AND SUPPLIES FOR ALL FIXTURES. REMOVE EXISTING FIXTURES AS REQUIRED TO ALLOW SUPPLY PIPING TO BE REPLACED AND REPLACE FIXTURES AFTER WALLS ARE REPAIRED BY GENERAL CONTRACTOR.
- REPLACE EXTERIOR HOSE BIBS AS NOTED. PROVIDE ISOLATION VALVES AT BRANCH FROM MAIN. SEAL PIPING THRU EXTERIOR FOUNDATION WALL. GROUT NEW FIXTURE IN PLACE. EXTERIOR WALL FINISH TO BE REPAIRED BY GENERAL CONTRACTOR.
- REPLACE EXISTING GAS HOT WATER HEATER LOCATED IN BOILER ROOM. INSTALL NEW ELECTRIC WATER HEATER IN MAIN LEVEL JANITOR CLOSEST.
- REPIPE EXISTING CONDENSOR WATER FILL SYSTEM, REPLACING GALVANIZED PIPE, WITH COPPER OR BRASS. REUSE EXISTING STRAINER, RP BACKFLOW, PRV & SOLENOID VALVE. REPLACE BALL VALVES.
- IRRIGATION SYSTEM IS NOT IN CONTRACT, EXCEPT FOR RECONNECTION OF IRRIGATION MAIN TO NEW SERVICE LINE FROM METER TO BUILDING, AND REPAIR OF ANY IRRIGATION SYSTEM DAMAGED OR DISTURBED BY MAIN LINE EXCAVATION AND REPLACEMENT.
- INSTALL 1/2" WATTS USG-B-M1 BLENDING VALVE UNDER EACH LAVATORY. ADJUST TO DELIVER 110F HOT WATER TO EACH LAVATORY FAUCET. EQUAL ASSE 1016 & 1070 LISTED BY PRIOR APPROVAL.
- BUILDING IS OCCUPIED. WORK MUST BE SCHEDULED THRU FM GROUP AND WATER SERVICE TO IRRIGATION SYSTEM AND ESSENTIAL INTERIOR FIXTURES MAINTAINED TO PROTECT LANDSCAPING, ALLOW OPERATION OF MECHANICAL SYSTEM AND ALLOW USE OF BUILDING DURING SCHEDULED HOURS OF OCCUPANCY.

DEMOLITION KEYNOTES

SYMBOL	NOTE
①	REMOVE EXISTING 2" GALVANIZED SERVICE LINE FROM METER TO IRRIGATION TEE. ABANDON IN PLACE REMAINING GALVANIZED PIPE FROM IRRIGATION TEE TO 2" VALVE WHERE LINE RISES INTO CRAWL SPACE. CAP ENDS OF ABANDONED PIPE.
②	REMOVE EXISTING 1-1/2" GALVANIZED SUPPLY MAIN FROM VALVE AT RISER THRU BOILER ROOM. DO NOT DAMAGE GAS, STEAM OR CONDENSATE PIPING.
③	REMOVE ALL EXISTING CULINARY WATER PIPING & VALVES LOCATED IN THE BOILER ROOM. EXISTING COPPER PIPING RISING THRU CEILING TO FIXTURES TO REMAIN. NEW PIPING WILL CONNECT TO THESE RISERS.
④	REMOVE ALL EXISTING GALVANIZED PIPE IN CONDENSOR WATER FILL SYSTEM. EXISTING EQUIPMENT TO BE REPIPED WITH COPPER OR BRASS PIPE.
⑤	REMOVE ALL EXISTING COLD WATER, HOT WATER AND ABANDONED GALVANIZED WATER PIPE LOCATED IN CRAWL SPACE. TAKE CARE NOT TO DAMAGE OTHER EXISTING PIPING.
⑥	REMOVE EXISTING WATER PIPING ABOVE FINISHED CEILING. VERIFY PIPE ROUTING PRIOR TO DEMOLITION. IF NEW PIPING WILL FOLLOW DIFFERENT ROUTING THAN EXISTING, ABANDON IN PLACE.
⑦	EXISTING HOSE BIB TO REMAIN.
⑧	EXISTING HOSE BIB TO BE REPLACED.
⑨	ESTIMATED LOCATION OF RISER UP THRU FLOOR INTO WALL TO BE REPLACED.
⑩	EXISTING COPPER RISERS THRU CEILING TO REMAIN AND BE CONNECTED TO NEW SUPPLY PIPING.
⑪	REMOVE WATER HEATER & CONNECTED WATER PIPING. PROTECT GAS PIPING AND FLUE
⑫	EXISTING COPPER BOILER FEED PIPING & VALVES TO REMAIN. CONNECT TO NEW COPPER SUPPLY PIPING.
⑬	FIELD VERIFY EXACT LOCATION OF EXISTING IRRIGATION TEE. IRRIGATION LINE TO BE RECONNECTED TO NEW SERVICE LINE.

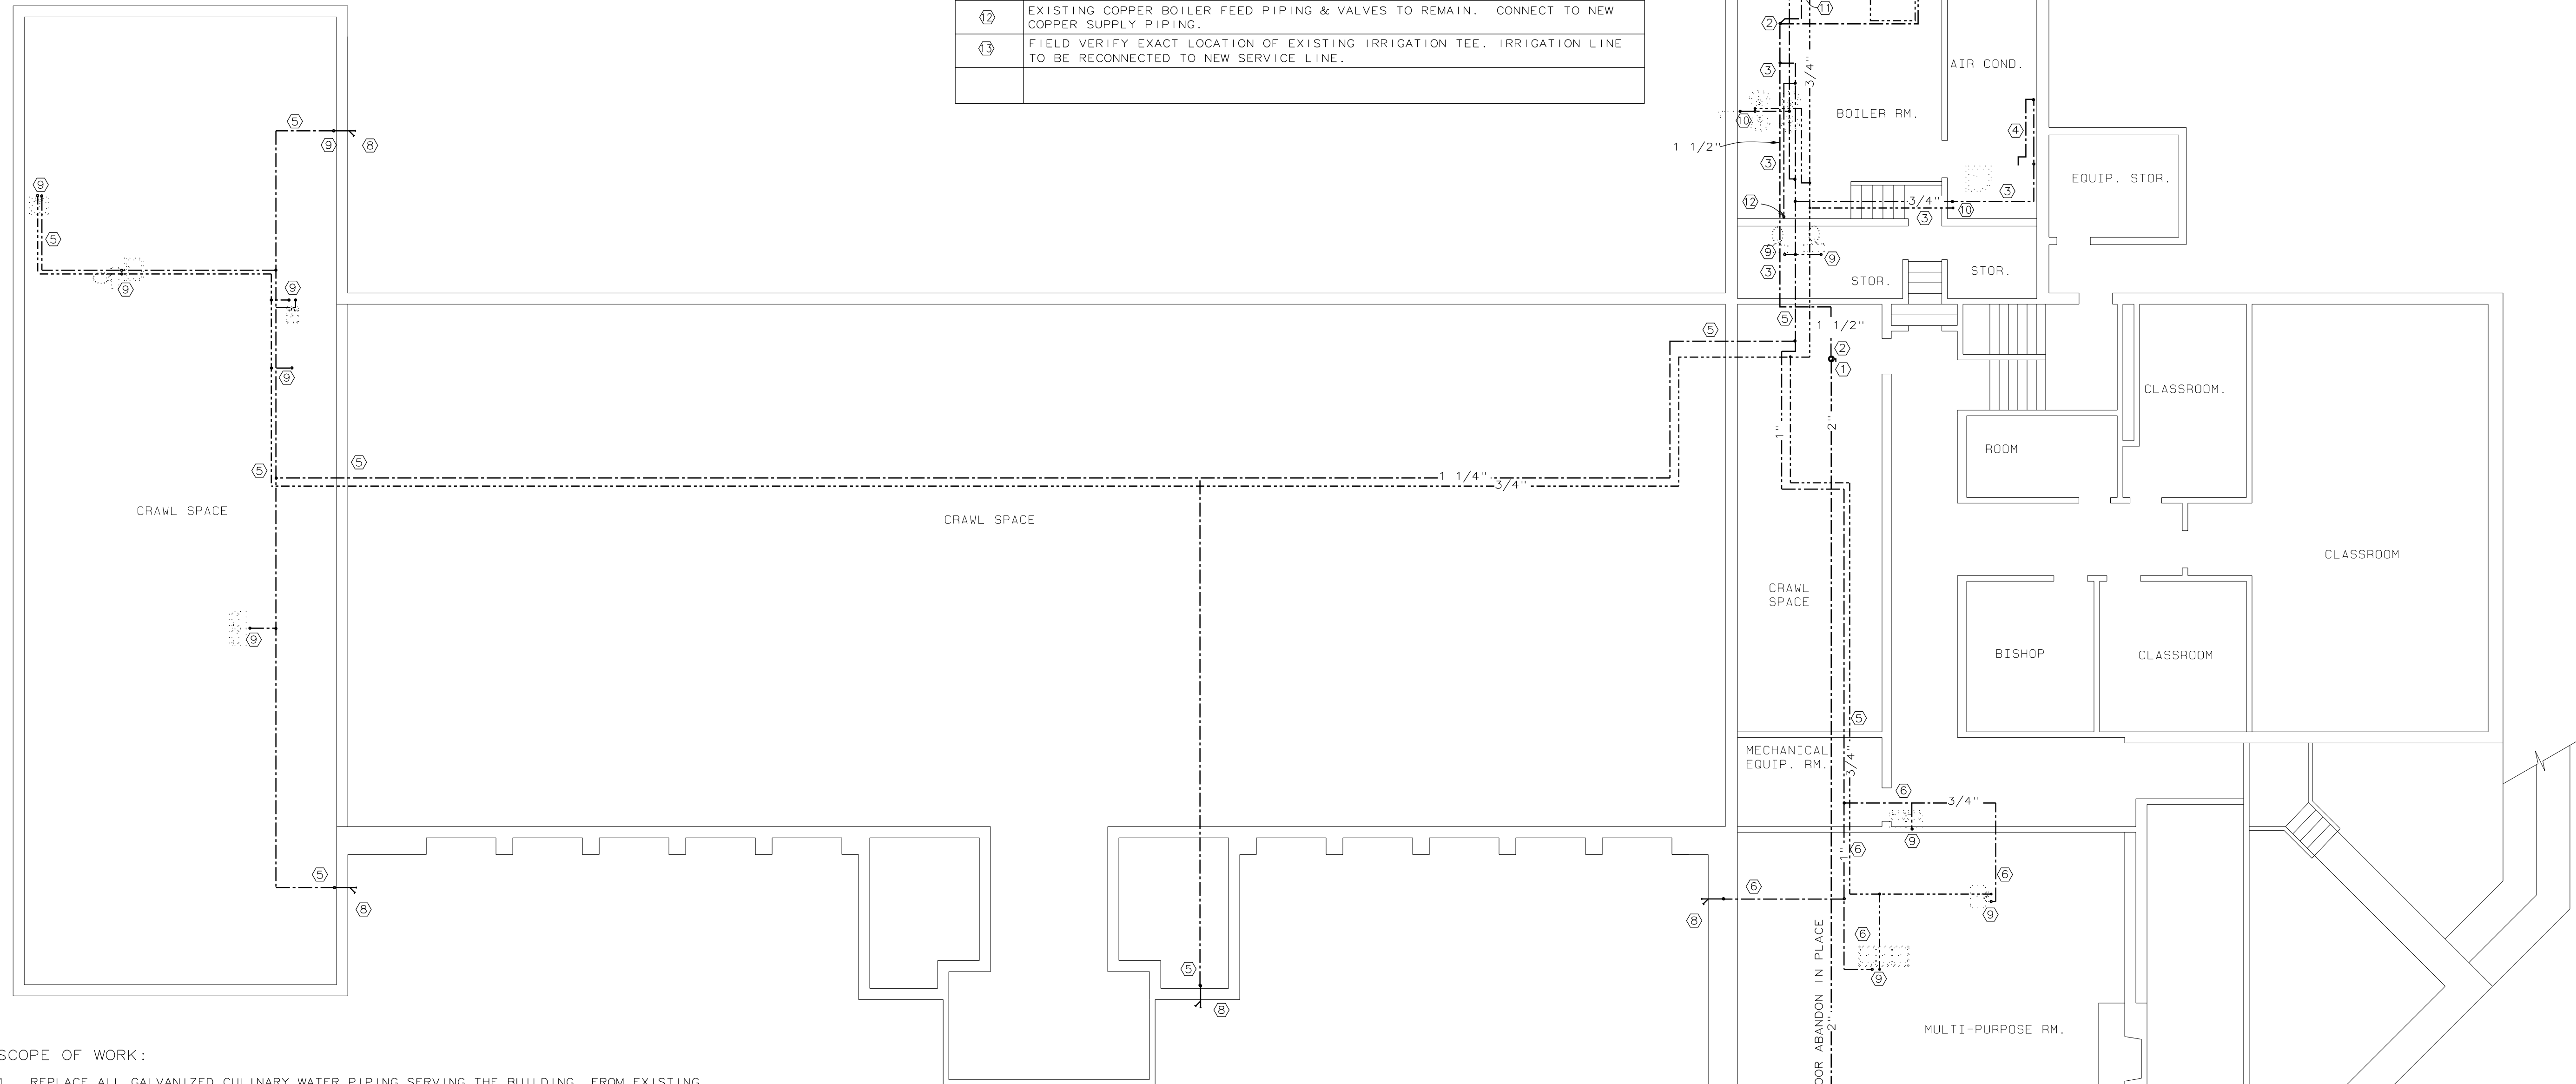


SCOPE OF WORK:

- REPLACE ALL GALVANIZED CULINARY WATER PIPING SERVING THE BUILDING, FROM EXISTING 2" METER TO BUILDING AND WITHIN THE BUILDING.
- REMOVE ALL ABANDONED PIPING THAT CAN BE REMOVED WITHOUT ADDITIONAL DEMOLITION OF FLOORS, WALLS, OR CEILINGS.
- REPLACE STOPS AND SUPPLIES FOR ALL FIXTURES. REMOVE EXISTING FIXTURES AS REQUIRED TO ALLOW SUPPLY PIPING TO BE REPLACED AND REPLACE FIXTURES AFTER WALLS ARE REPAIRED BY GENERAL CONTRACTOR.
- REPLACE EXTERIOR HOSE BIBS AS NOTED. PROVIDE ISOLATION VALVES AT BRANCH FROM MAIN. SEAL PIPING THRU EXTERIOR FOUNDATION WALL, GROUT NEW FIXTURE IN PLACE. EXTERIOR WALL FINISH TO BE REPAIRED BY GENERAL CONTRACTOR.
- REPLACE EXISTING GAS HOT WATER HEATER LOCATED IN BOILER ROOM. INSTALL NEW ELECTRIC WATER HEATER IN MAIN LEVEL JANITOR CLOSEST.
- REPIPE EXISTING CONDENSOR WATER FILL SYSTEM, REPLACING GALVANIZED PIPE, WITH COPPER OR BRASS. REUSE EXISTING STRAINER, RP BACKFLOW, PRV & SOLENOID VALVE. REPLACE BALL VALVES.
- IRRIGATION SYSTEM IS NOT IN CONTRACT, EXCEPT FOR RECONNECTION OF IRRIGATION MAIN TO NEW SERVICE LINE FROM METER TO BUILDING, AND REPAIR OF ANY IRRIGATION SYSTEM DAMAGED OR DISTURBED BY MAIN LINE EXCAVATION AND REPLACEMENT.
- INSTALL 1/2" WATTS USC-B-M1 BLENDING VALVE UNDER EACH LAVATORY. ADJUST TO DELIVER 110F HOT WATER TO EACH LAVATORY FAUCET. EQUAL ASSE 1016 & 1070 LISTED BY PRIOR APPROVAL.
- BUILDING IS OCCUPIED. WORK MUST BE SCHEDULED THRU FM GROUP AND WATER SERVICE TO IRRIGATION SYSTEM AND ESSENTIAL INTERIOR FIXTURES MAINTAINED TO PROTECT LANDSCAPING, ALLOW OPERATION OF MECHANICAL SYSTEM AND ALLOW USE OF BUILDING DURING SCHEDULED HOURS OF OCCUPANCY.


DEMOLITION NOTES:

- BUILDING CONTAINS STEAM AND CONDENSATE PIPING THAT IS NOT TO BE DISTURBED.
- EXACT ROUTING OF EXISTING PIPING IS NOT KNOWN. CONTRACTOR WILL NEED TO VERIFY SIZE, LOCATION AND ROUTING OF ALL EXISTING GALVANIZED WATER PIPE. REMOVE ALL EXISTING ACTIVE AND ABANDONED GALVANIZED WATER PIPING LOCATED IN CRAWL SPACES, BOILER ROOM AND UNFINISHED AREAS. ABANDONED PIPING IN WALLS OR ABOVE CEILINGS THAT DO NOT NEED TO BE OPENED FOR INSTALLATION OF NEW PIPING MAY BE ABANDONED IN PLACE.
- COORDINATE REQUIRED DEMOLITION OF WALLS, FLOORS & CEILINGS WITH GENERAL CONTRACTOR TO MINIMIZE REQUIRED DEMOLITION AND REPAIR.
- ALL FIXTURES EXCEPT WATER HEATER ARE TO BE REUSED. IF REMOVAL IS REQUIRED TO INSTALL NEW STOPS AND SUPPLY PIPING, EXERCISE CARE & STORE IN SAFE LOCATION. REINSTALL AFTER WALLS/CABINETS ARE REPAIRED.
- REUSE OF EXISTING PIPE HANGERS IN UTILITY AREAS IS PERMITTED. INSULATE COPPER PIPE FROM FERROUS PIPE HANGERS.

LOWER FLOOR PLUMBING DEMOLITION PLAN
SCALE:
1/8"=1'-0"

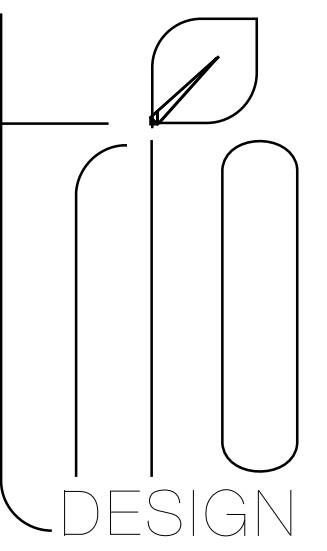

3995 west 7800 south #201
west jordan, ut 84088
801.417.9951
www.triodesigninc.com

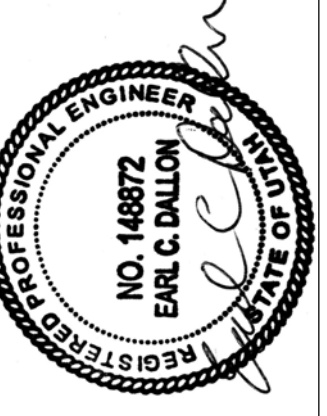

B BRUNNER & DALLON
ENGINEERING
5330 S. 900 E. #240
SALT LAKE CITY, UT 84117
801 685-8081

PROJECT NAME:

MONUMENT PARK, PRINCETON (Bldg. 22)
 MONUMENT PARK STAKE
 1005 S. 2000 E. SALT LAKE CITY, UTAH

PROJECT FOR:

THE CHURCH OF
JESUS CHRIST
 OF LATTER-DAY SAINTS

REVISIONS:

Date:
APRIL 28, 2017

Plan Series:

Property Number:
506-8525

Sheet Title:

**LOWER FLOOR
PLUMBING
DEMO PLAN**

Sheet No.:

P.2D