
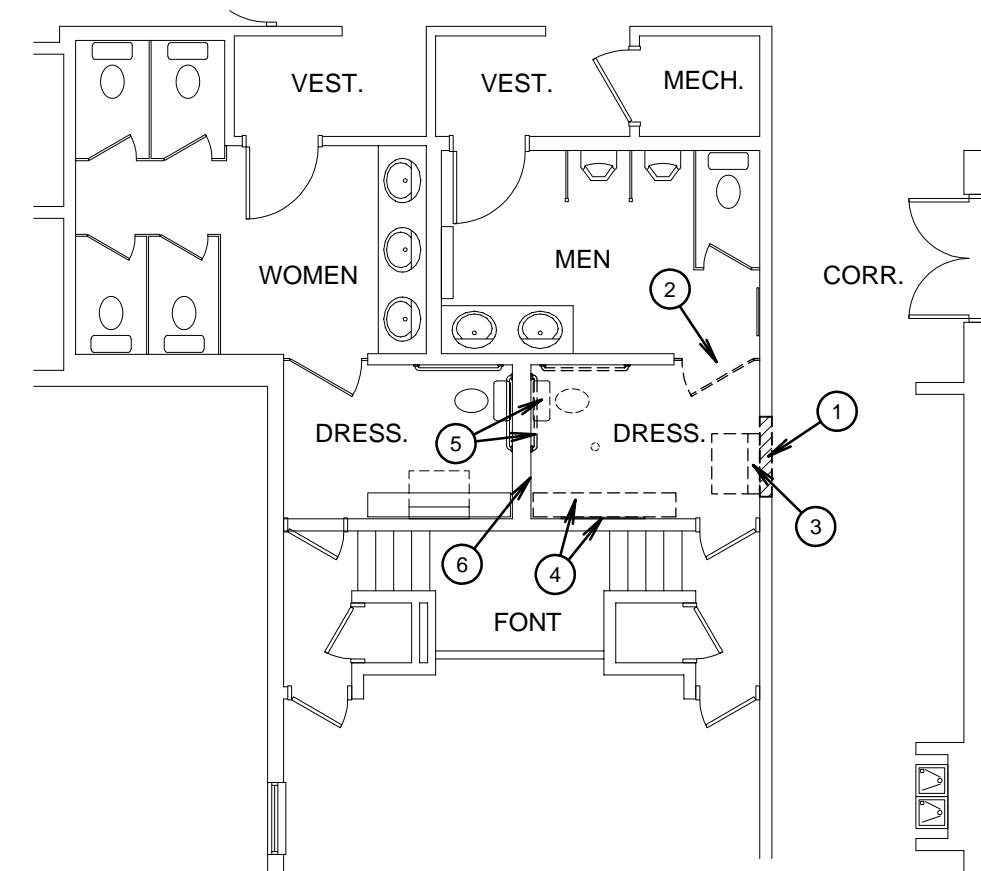



TAYLORSVILLE 12,25 TAYLORSVILLE UT SOUTH STAKE

SITE: 4505 SOUTH BRIANS WAY, TAYLORSVILLE, UTAH
THE CHURCH OF JESUS CHRIST OF LATTER-DAY SAINTS
PROJECT NUMBER: 5141710-19020101

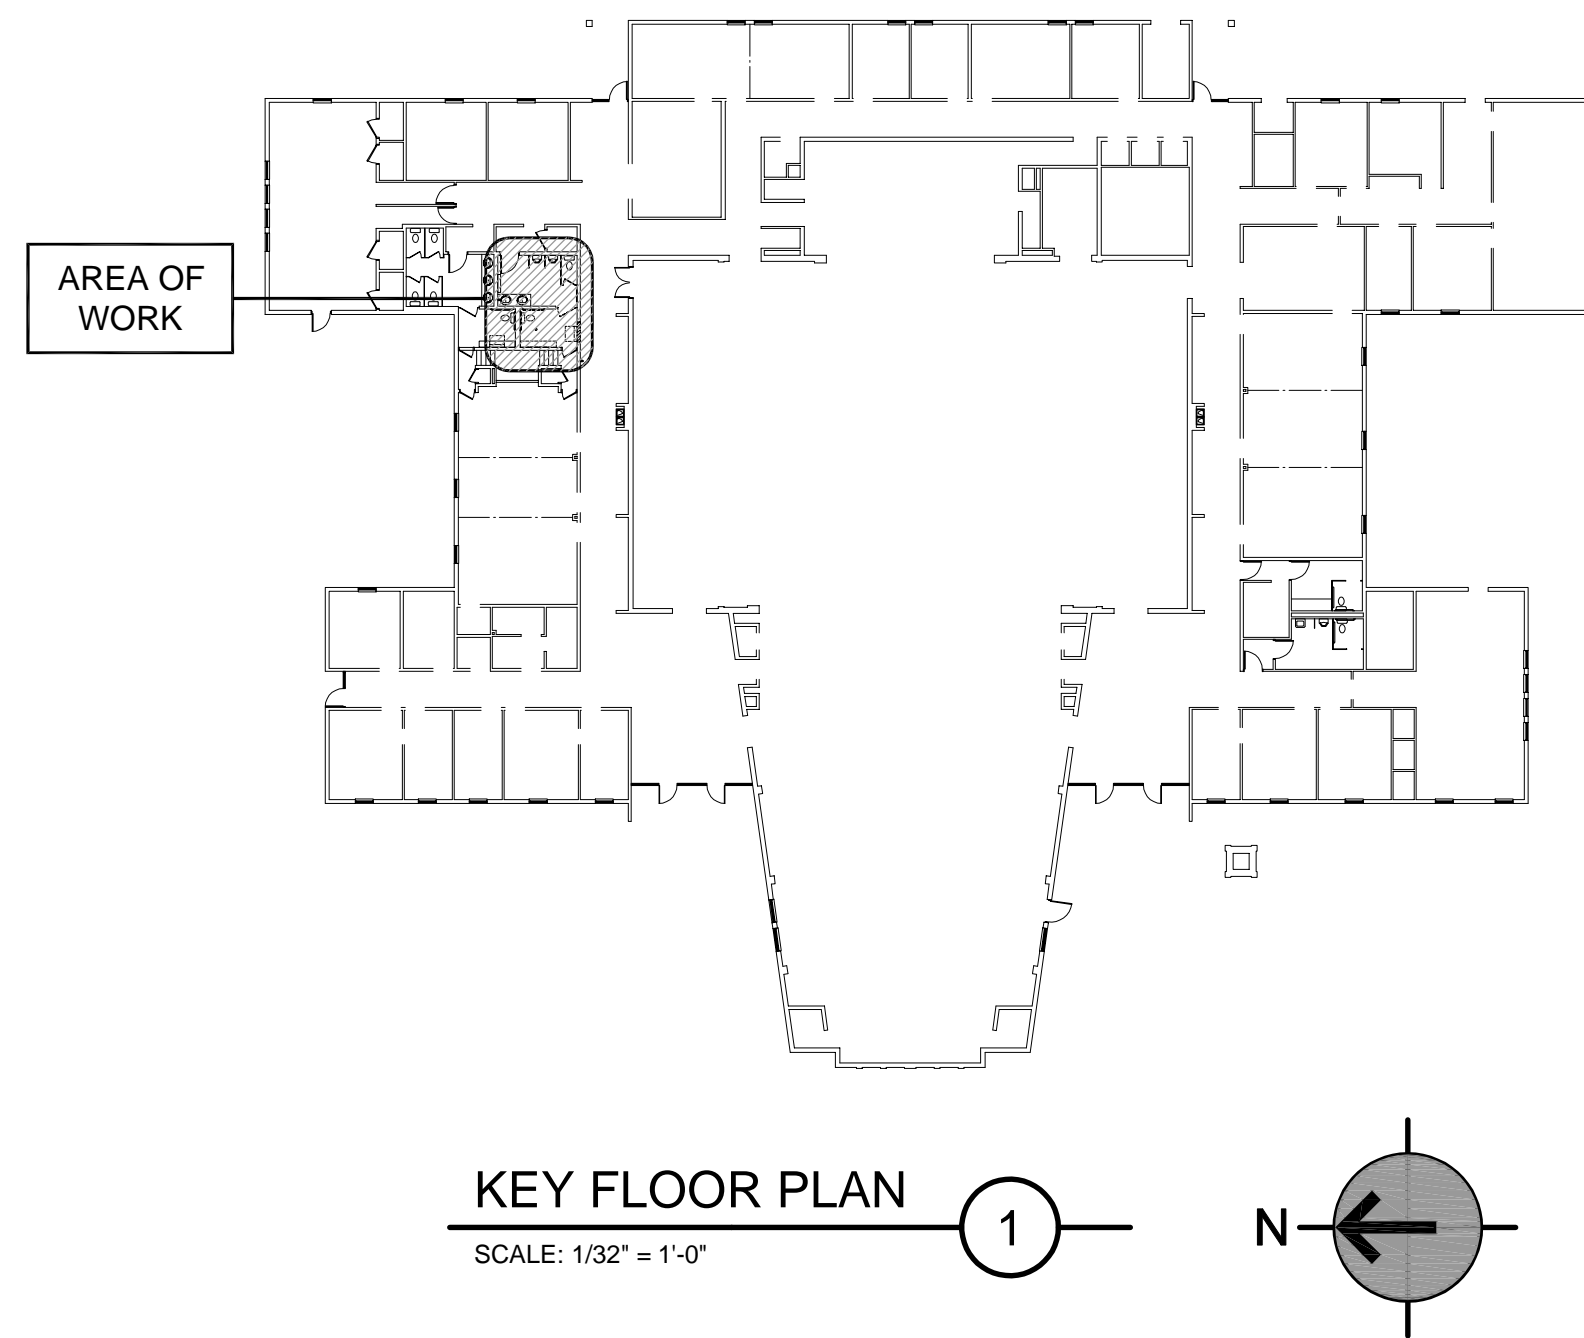

NORTHEAST RESTROOMS
DEMOLITION FLOOR PLAN

SCALE: 1/8" = 1'-0"

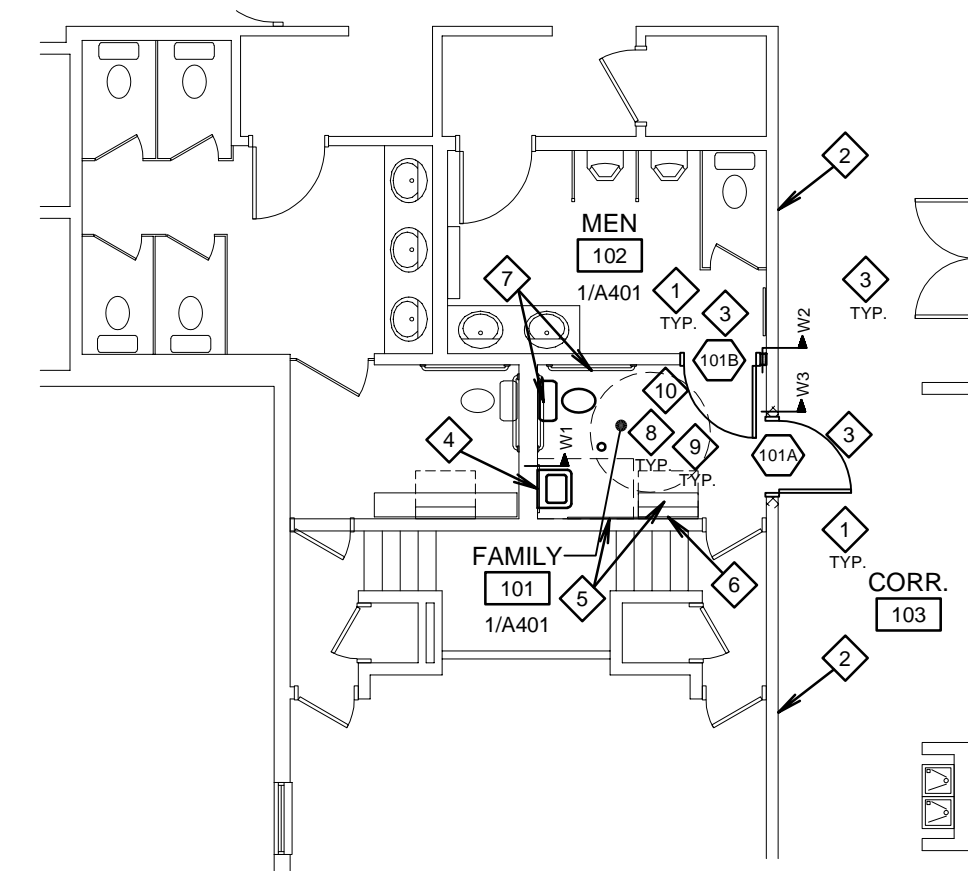


NORTHEAST RESTROOMS
NEW FLOOR PLAN

SCALE: 1/8" = 1'-0"

KEYED DEMOLITION PLAN NOTES	
①	REMOVE EXISTING WALL OR PORTION OF WALL WHERE SHOWN HATCHED.
②	REMOVE EXISTING TOILET PARTITION AND SALVAGE TO OWNER.
③	REMOVE AND SALVAGE EXISTING BABY CHANGING STATION.
④	REMOVE AND SALVAGE EXISTING BENCH AND BRACKETS. EXISTING HOOK STRIP TO REMAIN.
⑤	REMOVE AND SALVAGE EXISTING WATER CLOSET AND GRAB BARS.
⑥	REMOVE PORTION OF EXISTING WALL TILE AND GYPSUM BOARD. SEE SHEET A401.


KEYED FLOOR PLAN NOTES	
◇	PATCH EXISTING WALLS, FLOORS AND CEILINGS TO MATCH WHERE DISTURBED BY NEW WORK.
◇	CLEAN AND PATCH EXISTING CMU WALLS AND PAINT WALL FROM CORNER TO DOOR FRAME.
◇	NEW DOOR, FRAME AND HARDWARE. SEE SHEET A601.
◇	NEW PATCH EXISTING WALL TILE AND GYPSUM BOARD TO MATCH. SEE SHEET A401.
◇	SHORTEN EXISTING BENCH TO 2'-6" LONG AND REINSTALL WITH SALVAGED EXISTING BRACKETS. EXISTING HOOK STRIP TO REMAIN. SEE SHEET A401.
◇	REINSTALL EXISTING SALVAGED BABY CHANGING STATION IN NEW LOCATION.
◇	REINSTALL EXISTING SALVAGED GRAB BARS AND NEW VERTICAL GRAB BAR. SEE SHEET A401.
◇	PLUMBING: REINSTALL EXISTING WATER CLOSET IN EXISTING LOCATION. PROTECT EXISTING FLOOR DRAIN TO REMAIN. INSTALL NEW WALL-MOUNTED LAVATORY WITH WALL CARRIERS. SEE SHEET P101.
◇	PROTECT EXISTING WALL AND FLOOR TILE AND BASE TO REMAIN. REMOVE EXISTING AND RECAULK ALL TILE JOINTS, WALL CORNERS AND WALL/CEILING CORNERS ENTIRE ROOM.
◇	CURB AND FLASHINGS ON ROOF FOR EXHAUST FAN OUTLET. SEE DETAILS D.E.F ON SHEET M101.

GENERAL CEILING NOTES	
EXISTING AREAS:	
1.	CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING PIPING, WIRING, DUCT WORK AND OTHER EXISTING WORK IN EXISTING FRAMING AND ATTIC SPACES AND COORDINATE WITH NEW WORK.
2.	FILL HOLES AND PATCH CEILING WHERE EXISTING LIGHT FIXTURES, GRILLES, DIFFUSERS, FURRING OR OTHER WORK IS REMOVED OR WHERE NEW WORK DOES NOT COVER EXISTING OPENINGS COMPLETELY.
3.	REMOVE AND REINSTALL EXISTING LIGHT FIXTURES, GRILLES, DIFFUSERS, SPEAKERS AND OTHER EXISTING WORK AS REQUIRED TO ACCOMMODATE PAINTING OF CEILING TILE AND OTHER NEW WORK.
KEYED CEILING DEMOLITION NOTES	
①	EXISTING GYPSUM BOARD CEILING TO REMAIN. REMOVE PORTIONS AS REQUIRED TO ACCOMMODATE THIS NEW WORK.
②	REMOVE AND SALVAGE EXISTING LIGHT FIXTURE AND CEILING SENSOR.
CEILING KEYED NOTES	
△	EXISTING GYPSUM BOARD CEILING TO REMAIN. PATCH AND TEXTURE TO MATCH AS REQUIRED WHERE DISTURBED FOR THIS NEW WORK. PAINT CEILING ENTIRE ROOM. REINSTALL OR REPLACE DISTURBED EXISTING ATTIC INSULATION ABOVE.
△	NEW EXHAUST FAN GRILLE. SEE MECHANICAL DRAWINGS.
△	REINSTALL EXISTING SALVAGED LIGHT FIXTURE AND CEILING SENSOR. SEE ELECTRICAL DRAWINGS.

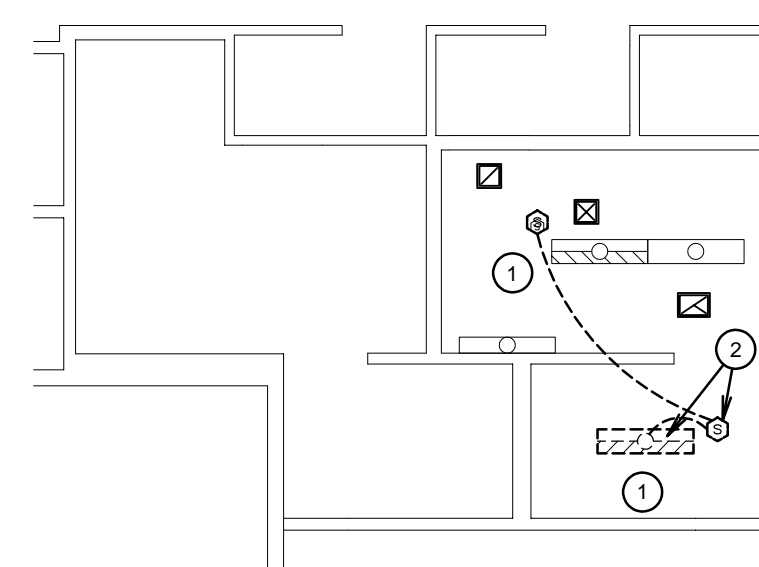

NORTHEAST RESTROOMS
DEMOLITION REFLECTED CEILING PLAN

SCALE: 1/8" = 1'-0"

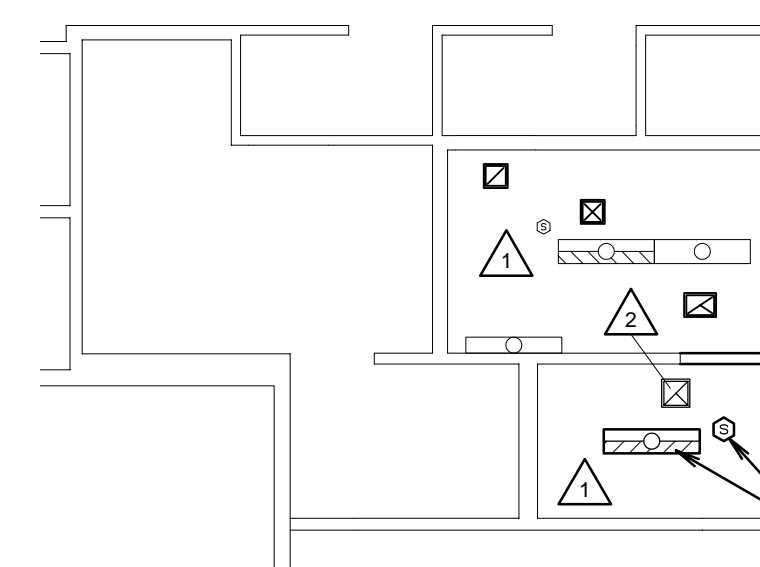

NORTHEAST RESTROOMS
NEW REFLECTED CEILING PLAN

SCALE: 1/8" = 1'-0"

DRAWING INDEX

ARCHITECTURAL	
A101	COVER SHEET, FLOOR PLANS, REFLECTED CEILING PLANS AND NOTES
A401	ENLARGED RESTROOMS
A601	FINISH & DOOR SCHEDULES AND DETAILS
PLUMBING	
P101	PLUMBING PLANS
MECHANICAL	
M101	MECHANICAL PLANS AND ROOFING DETAILS
ELECTRICAL	
E101	ELECTRICAL PLANS

GENERAL DEMOLITION NOTES

- DEMOLITION DRAWINGS ARE SHOWN TO ASSIST CONTRACTOR ONLY, AND ARE NOT INTENDED TO BE ALL-INCLUSIVE OR TO LIMIT EXTENT OF DEMOLITION WORK REQUIRED. CONTRACTOR SHALL VISIT THE SITE PRIOR TO BIDDING AND COORDINATE WITH ALL TRADES AND DRAWINGS TO DEFINE EXTENT OF DEMOLITION WORK REQUIRED TO PERFORM NEW WORK AND TO CARRY OUT THE INTENT OF THESE CONTRACT DRAWINGS.
- OWNER HAS FIRST RIGHTS TO SALVAGE.
- SEE ALL OTHER DOCUMENTS FOR ADDITIONAL DEMOLITION REQUIREMENTS. COORDINATE.
- CONTRACTOR TO MAINTAIN STRUCTURAL INTEGRITY OF EXISTING STRUCTURE. PROVIDE HEADERS, FRAMING OR STRUCTURAL SUPPORT TO ACCOMMODATE NEW OPENINGS, REMOVED STRUCTURE, ETC.
- WHERE SHOWN "POCHED" POCHED ON PLAN, REMOVE EXISTING WALL OR PORTION OF WALL - COMPLETE. REMOVE ALL PIPING, WIRING, EQUIPMENT, AND OTHER ITEMS CONCEALED IN WALL. COORDINATE ITEMS TO BE MAINTAINED AND ABANDONED WITH ALL DISCIPLINES.

GENERAL NOTES

- NEW WALLS ARE SHOWN "POCHED" TYPICAL.
- WHEN EXISTING WORK IS TO REMAIN - MECHANICAL, PLUMBING, ELECTRICAL, SOUND OR OTHER WORK WHICH IS ENCOUNTERED WITH REMOVAL OF FLOORS, WALLS OR CEILINGS, SHALL BE REROUTED INTO NEW OR EXISTING WORK TO MAINTAIN CONTINUITY.
- PROVIDE SOLID BLOCKING/BACKING AT ALL DOOR STOPS, FOLDING PARTITIONS, VANITY BRACKETS, CASEWORK, RAILINGS/GRAB BARS, CHALKBOARDS, PARTITIONS, AND OTHER EQUIPMENT AND ACCESSORIES.
- EXISTING CARPET TO REMAIN. COVER WITH HEAVY REINFORCED VISQUEEN TAPED AT ALL JOINTS AND ALONG EDGES TO PROTECT DURING CONSTRUCTION.
- CONTRACTOR TO MAINTAIN STRUCTURAL INTEGRITY OF EXISTING STRUCTURE. PROVIDE HEADERS, FRAMING OR STRUCTURAL SUPPORT TO ACCOMMODATE NEW OPENINGS, REMOVED STRUCTURE, ETC.
- PATCH ALL WALLS, FLOORS AND CEILINGS TO MATCH WHERE DISTURBED BY DEMOLITION OR NEW WORK.

INTERIOR - PATCHING/FINISHES:

PATCH AND REPAIR ALL EXISTING WORK DISTURBED BY THIS NEW WORK. WALLS, CEILINGS, FLOORS, TRIM AND OTHER WORK SHALL BE FINISHED TO MATCH EXISTING FINISHES FOR SPACE WHERE EXISTING WORK IS TO BE REPLACED AND FURRED OUT. REMOVE AND REINSTALL/EXTEND EXISTING FIXTURES, DEVICES, CONVECTORS, GRILLES, LOUVERS, EQUIPMENT AND OTHER EXISTING WORK TO NEW LOCATION TO ACCOMMODATE NEW WORK.

INSULATION:

CEILINGS: INSTALL EQUIVALENT TO R-38 INSULATION AT ALL NEW ATTIC OR DISTURBED ATTIC AREAS. PROVIDE COMPLETE ENVELOPE.
WALLS: REPLACE REMOVED INSULATION WITH EQUIVALENT TO MATCH EXISTING AT EXISTING WALLS.

CAULKING:

CAULK ALL NEW AND EXISTING DOOR AND WINDOW FRAMES AT AREAS OF NEW WORK. ENTIRE PERIMETER - EXTERIOR AND INTERIOR. CAULK PRIOR TO PAINTING AND FINISH WORK.

FIRESTOPPING:

FIRESTOP ALL WALL, FLOOR AND CEILING PENETRATIONS TO COMPLY WITH CURRENT CODES.


STRUCTURAL:

MAINTAIN STRUCTURAL INTEGRITY OF EXISTING STRUCTURE. PROVIDE HEADERS, FRAMING OR STRUCTURAL SUPPORT TO ACCOMMODATE NEW OPENINGS, REMOVED STRUCTURE, ETC.

WALL TYPES SCHEDULE

MARK	DESCRIPTION
W-1	EXISTING WOOD FRAMED WALL. REMOVE PORTIONS AS REQUIRED TO PROVIDE ACCESS FOR NEW PLUMBING WORK. PATCH TO MATCH.
W-2	EXTEND EXISTING 2x4 WOOD FRAMED WALL WITH 5/8" GYPSUM BOARD AND CERAMIC TILE EACH SIDE. FULL THICK ACOUSTIC INSULATION AT ALL VOIDS.
W-3	EXISTING 6" CMU WALL. 8" HIGH CMU COURSES TO MATCH EXISTING. STACKED BOND. TOOTH-IN TO EXISTING.
NOTE:	ALL WALL TYPES: WHERE WALLS ARE TO RECEIVE CERAMIC WALL TILE, INSTALL 5/8" GLASS MAT GYPSUM TILE BACKER INSTEAD OF 5/8" GYPSUM BOARD.

bradley gygi architect & associates, pllc
2160 South 1300 East, Suite 500
Salt Lake City, Utah 84106
801.747.2451

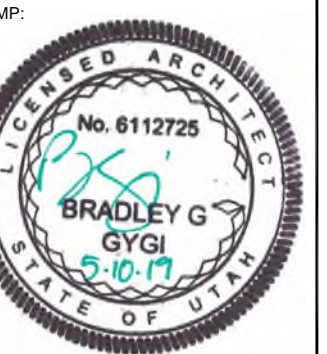

TAYLORSVILLE 12,25
TAYLORSVILLE UT SOUTH STAKE
4505 SOUTH BRIANS WAY
TAYLORSVILLE, UTAH


PROJECT FOR:
THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

PROJECT NUMBER:
5141710-19020101
DATE:
10 MAY 2019
PROPERTY NUMBER:
5141710

DRAWN BY:
BGG
CHECKED:
BGG

SHEET TITLE:
COVER SHEET,
FLOOR PLANS,
REFLECTED
CEILING PLANS
AND NOTES


SHEET:
A101

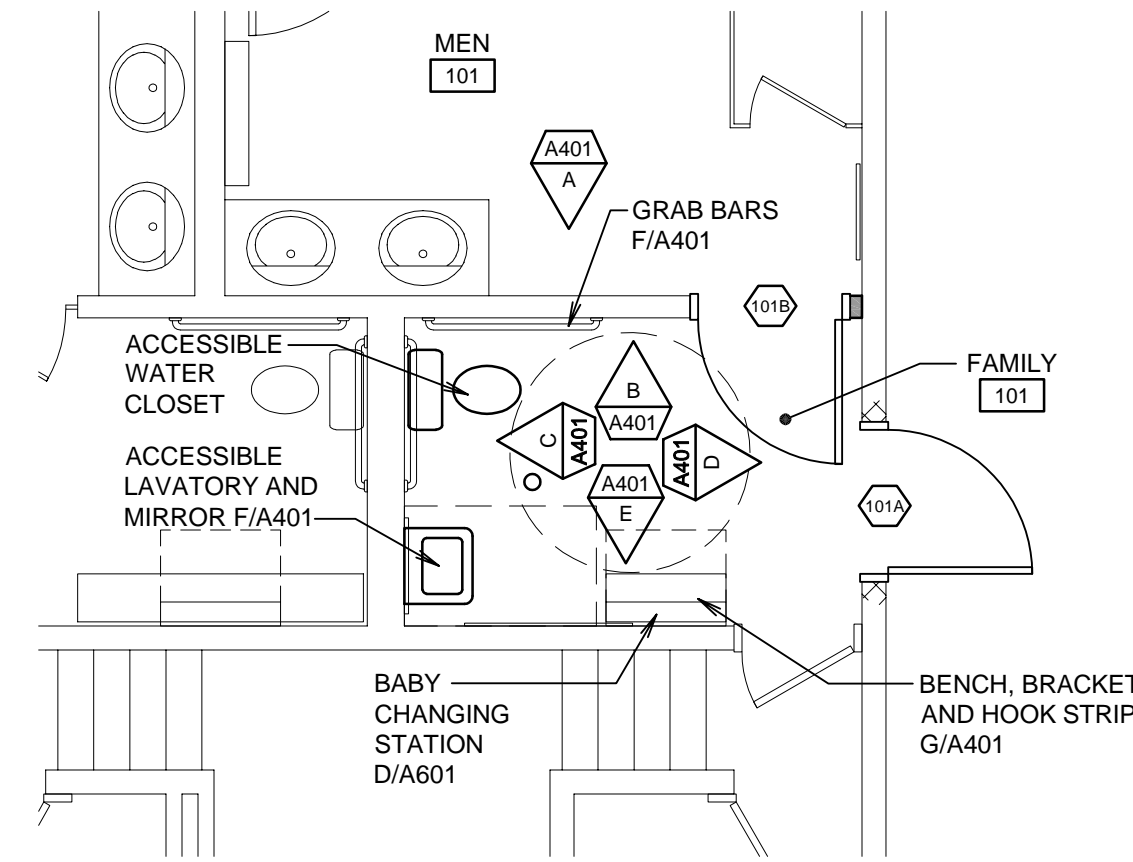

ENLARGED MEN'S 101 PLAN


SCALE: 1/4" = 1'-0"

1

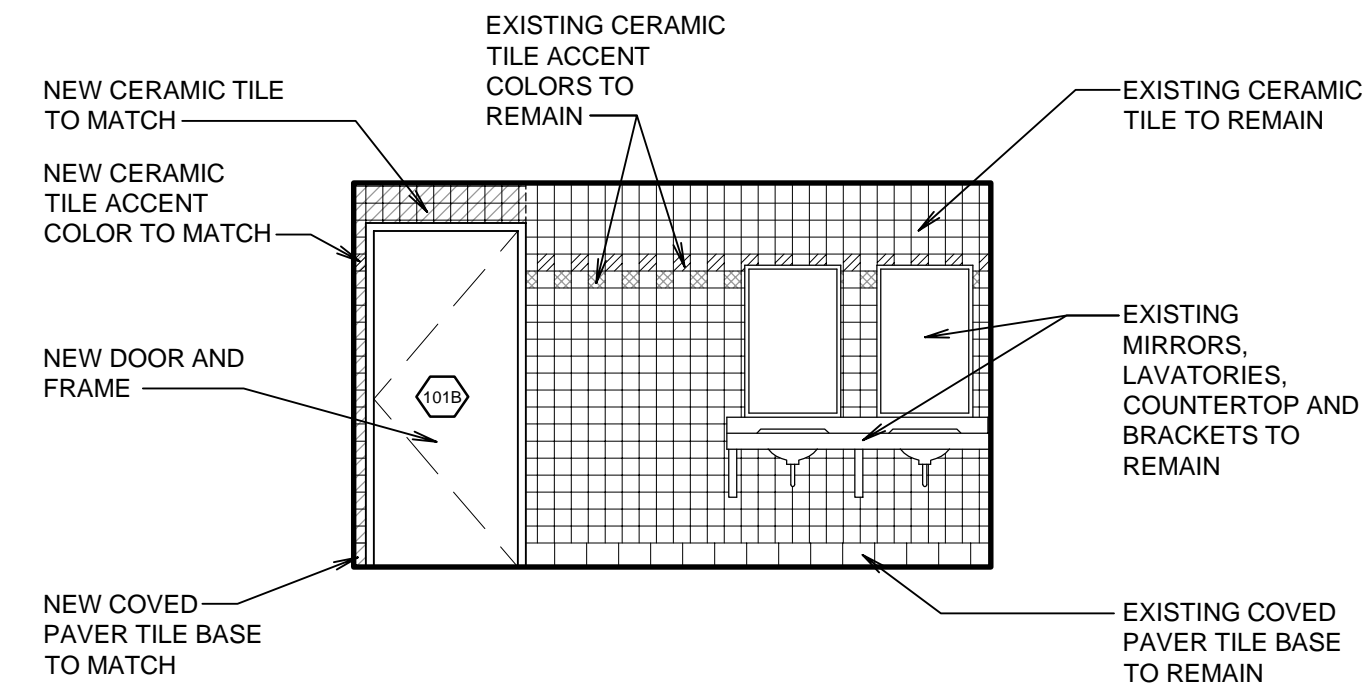


ELEVATION A

SCALE: 1/4" = 1'-0"

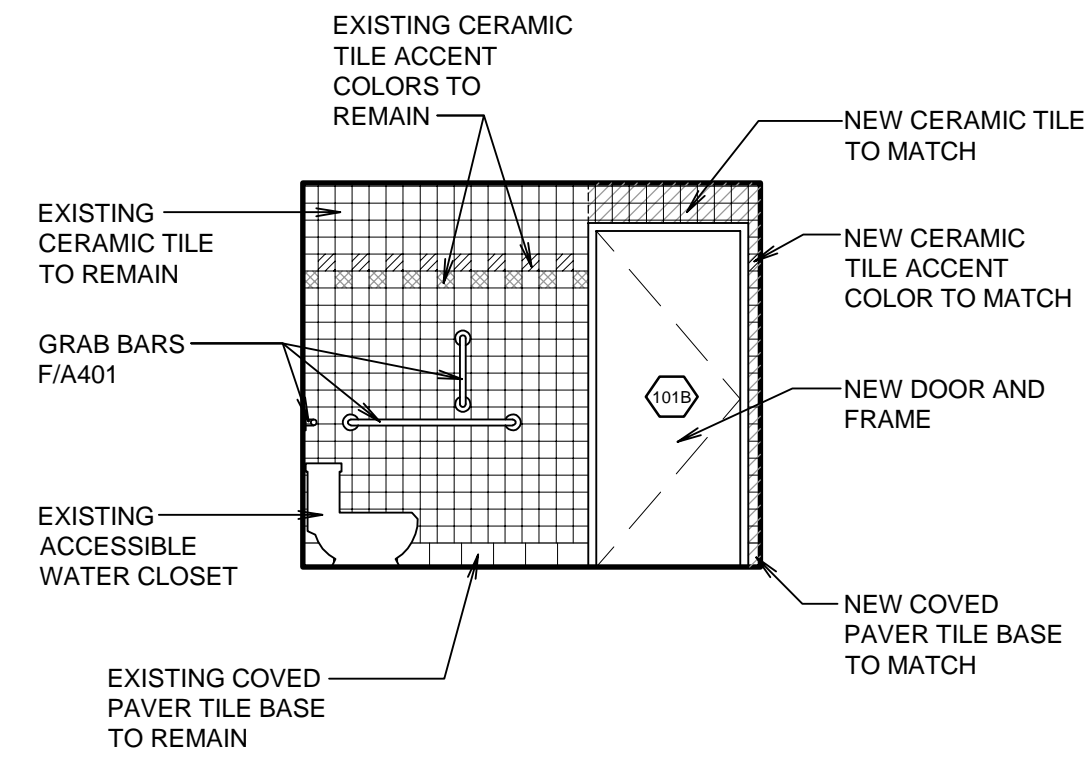


ELEVATION B

SCALE: 1/4" = 1'-0"

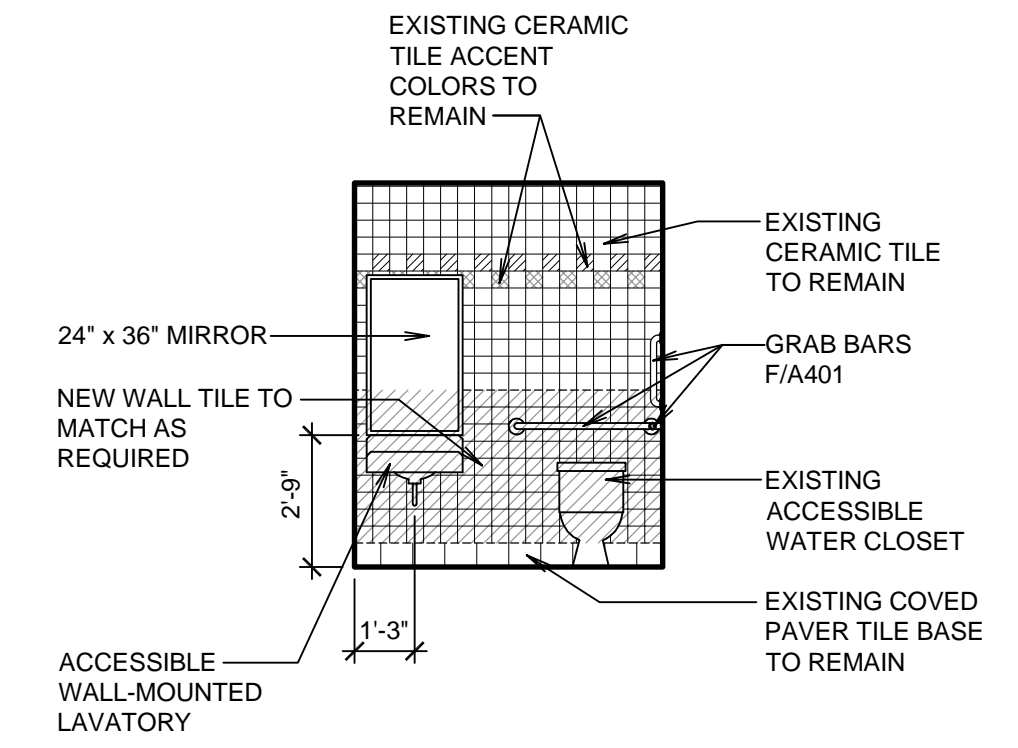


ELEVATION C

SCALE: 1/4" = 1'-0"

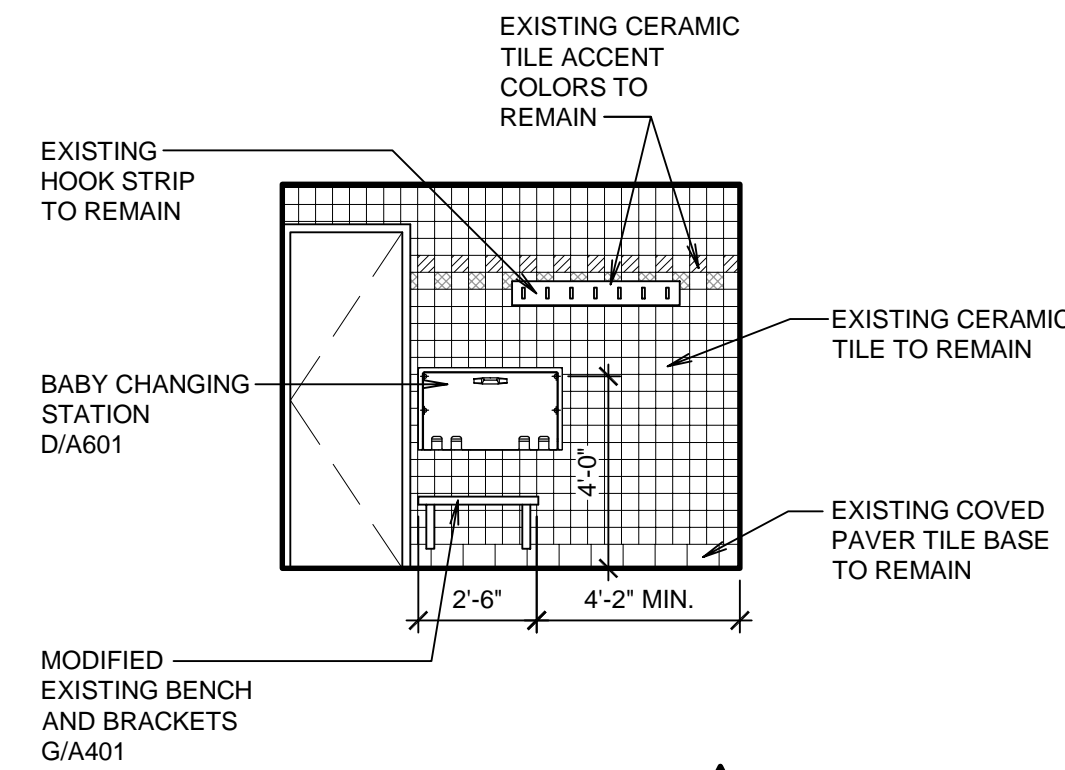


ELEVATION D

SCALE: 1/4" = 1'-0"

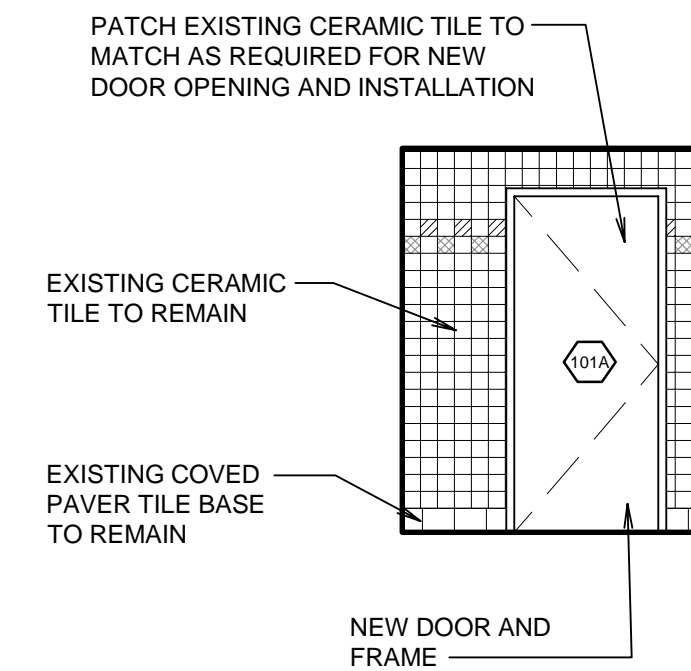

ELEVATION E


SCALE: 1/4" = 1'-0"

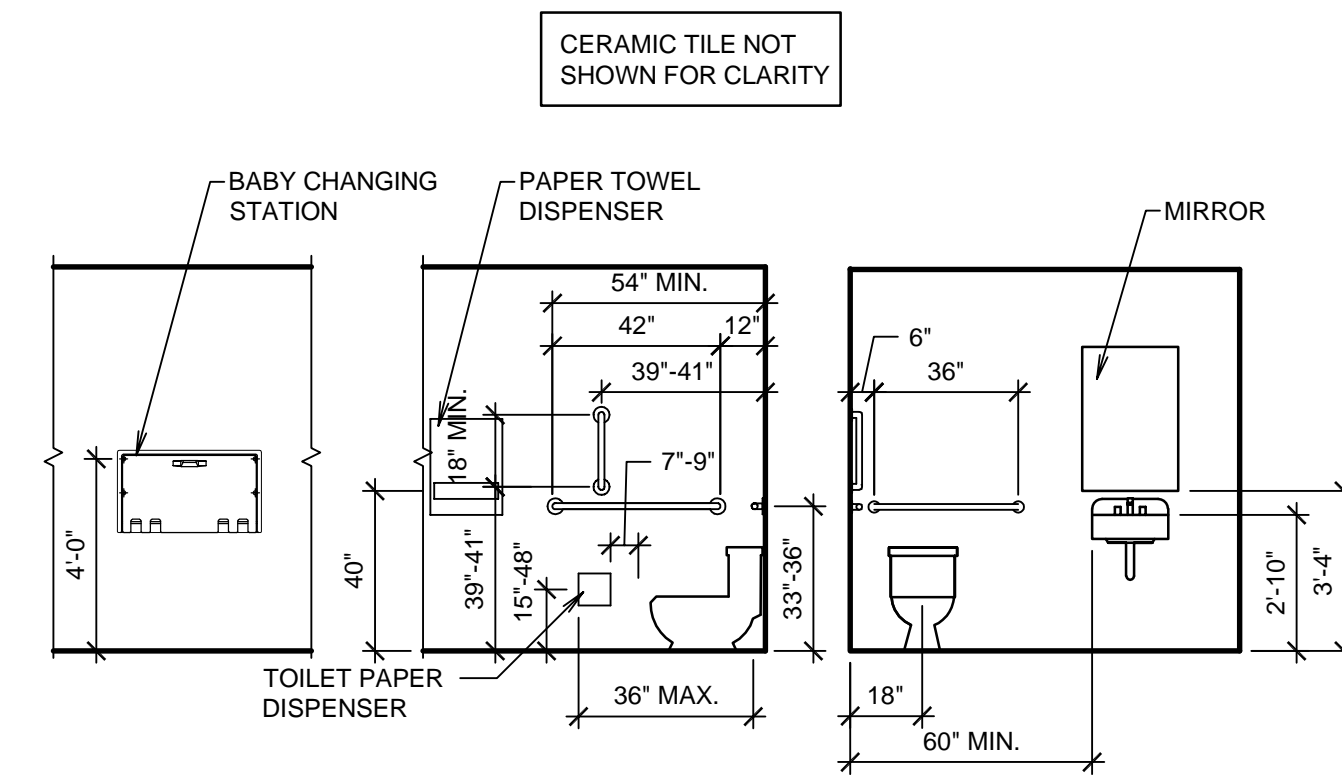

TYPICAL ACCESSORY MOUNTING LOCATIONS

SCALE: 1/4" = 1'-0"



F

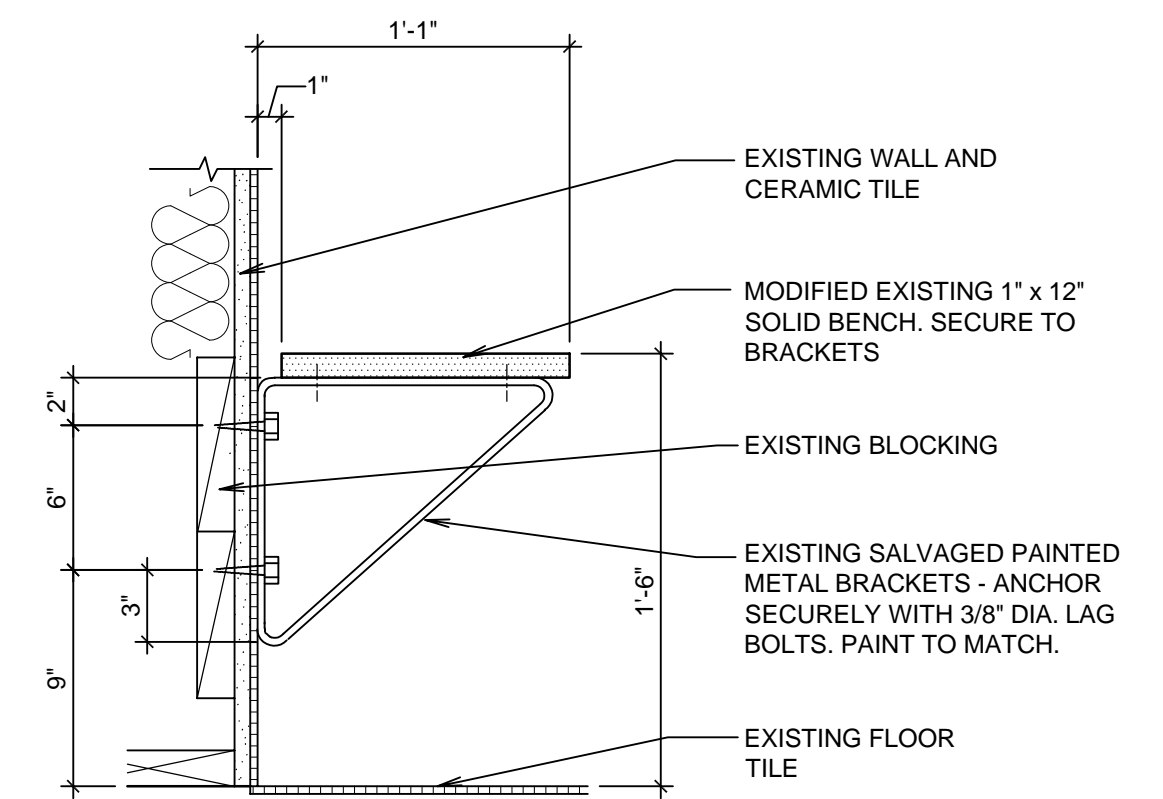

BENCH DETAIL

SCALE: 3/4" = 1'-0"

G

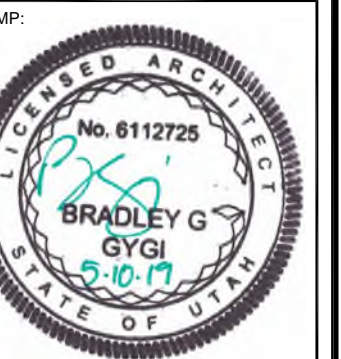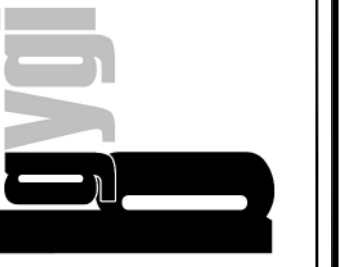

TAYLORSVILLE 12.25
 TAYLORSVILLE UT SOUTH STAKE
 4505 SOUTH BRIANS WAY
 TAYLORSVILLE, UTAH

PROJECT FOR:
THE CHURCH OF JESUS CHRIST OF LATTER-DAY SAINTS


PROJECT NUMBER:
 5141710-19020101
 DATE:
 10 MAY 2019
 PROPERTY NUMBER:
 5141710

DRAWN BY: BGG
 CHECKED: BGG


SHEET TITLE:
ENLARGED RESTROOMS

SHEET:

A401

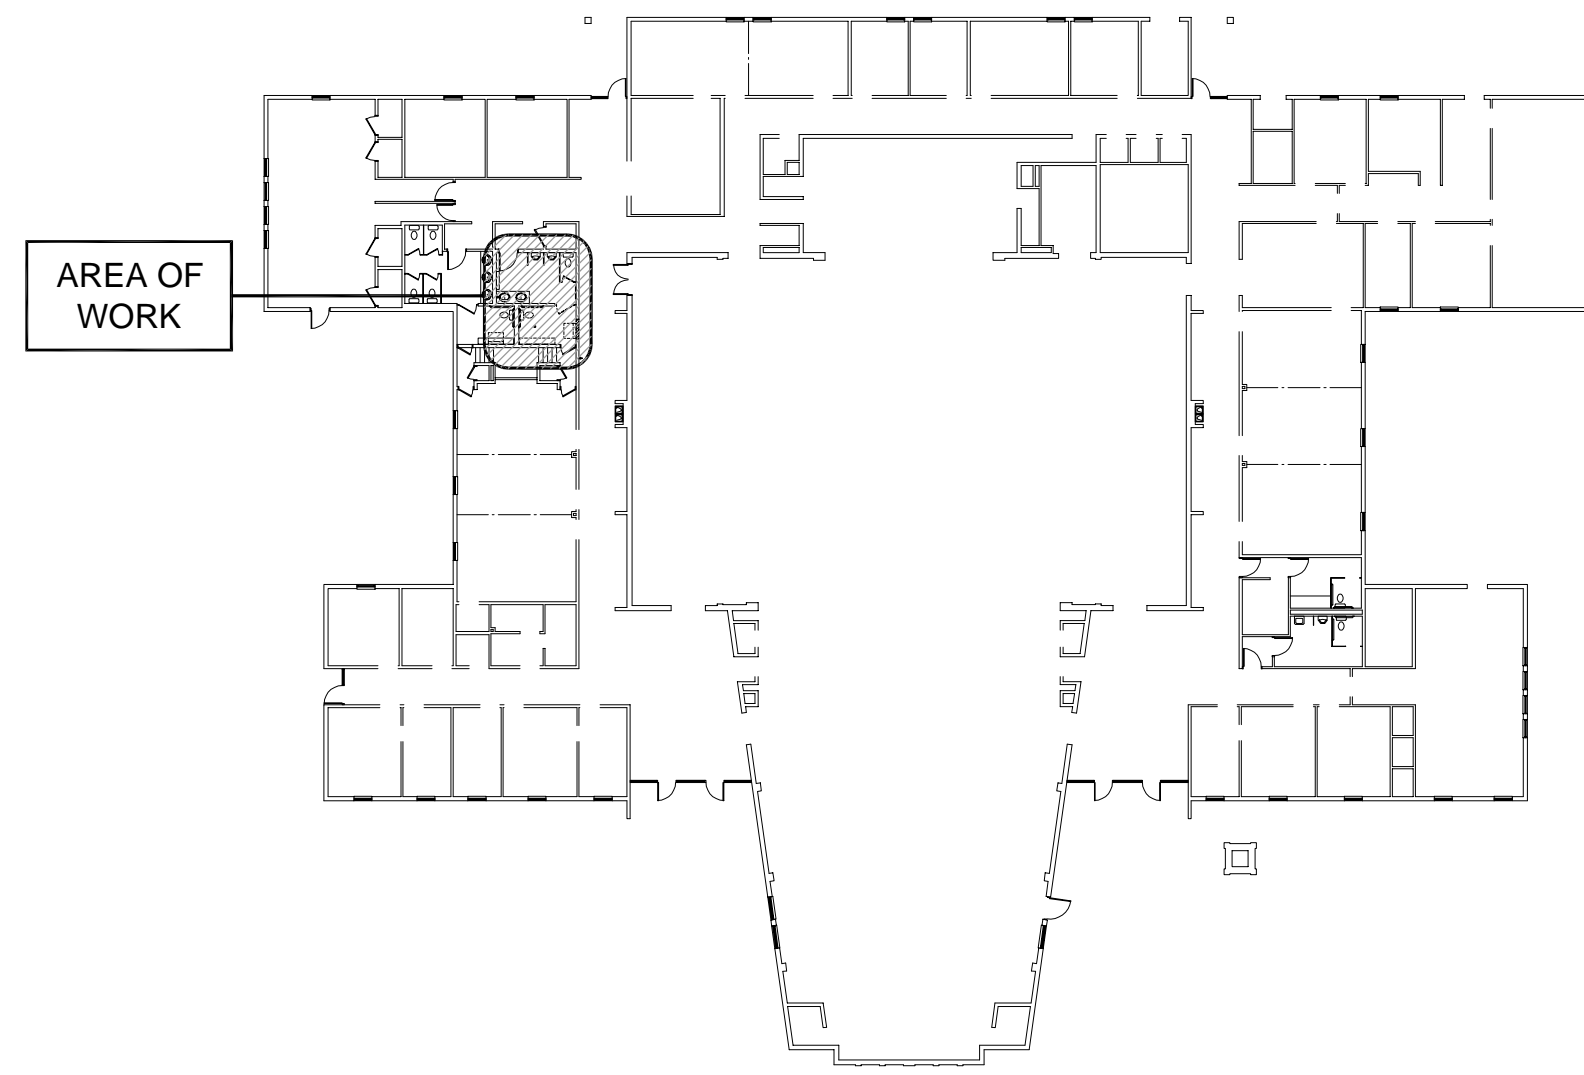


KEY PLAN

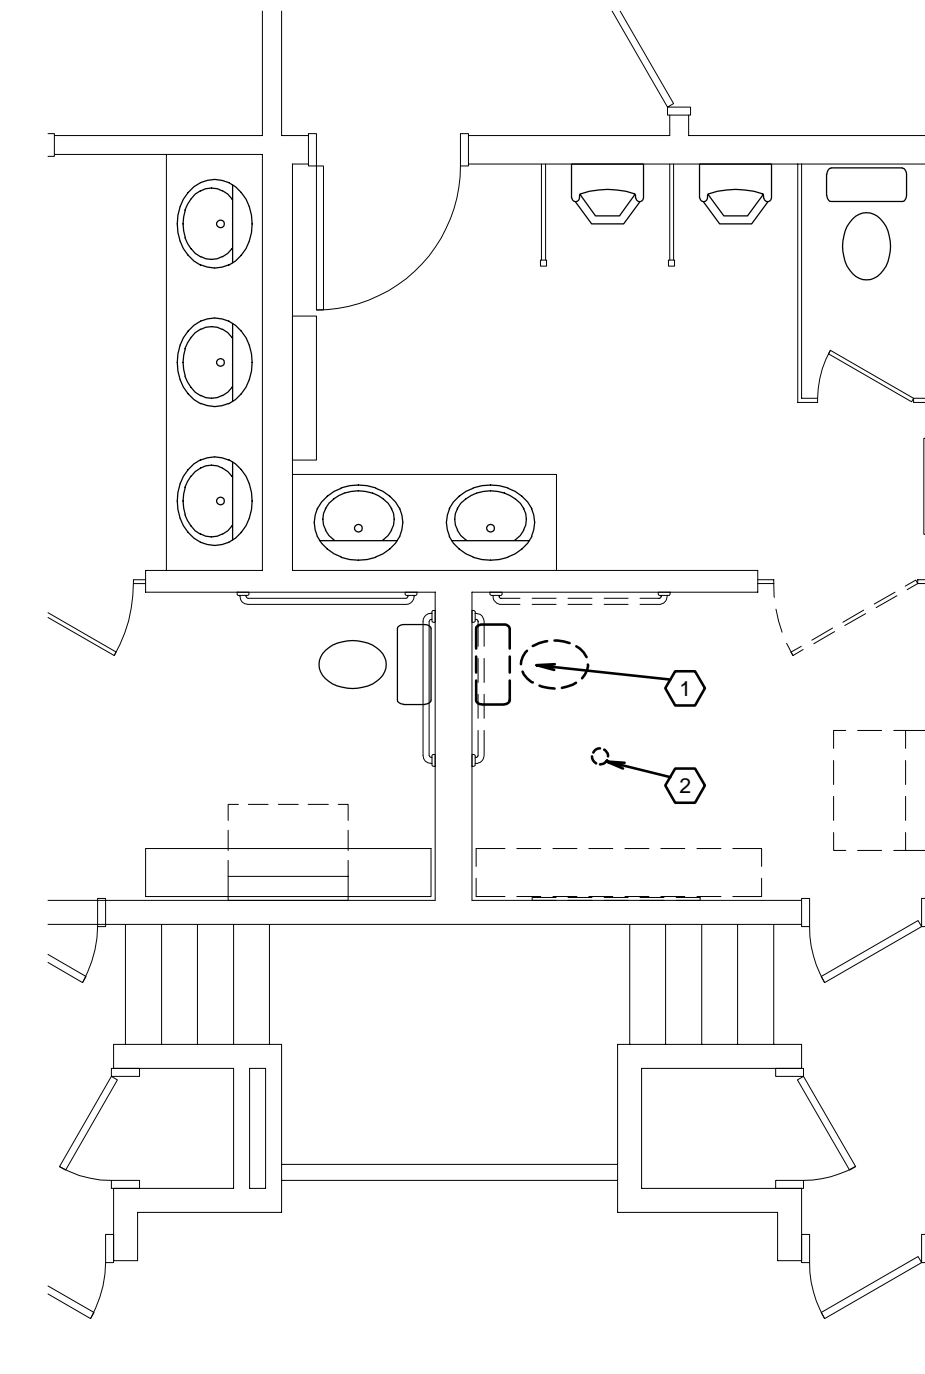

EXISTING / DEMOLITION PLUMBING PLAN

SCALE: 1/4" = 1'-0"


1

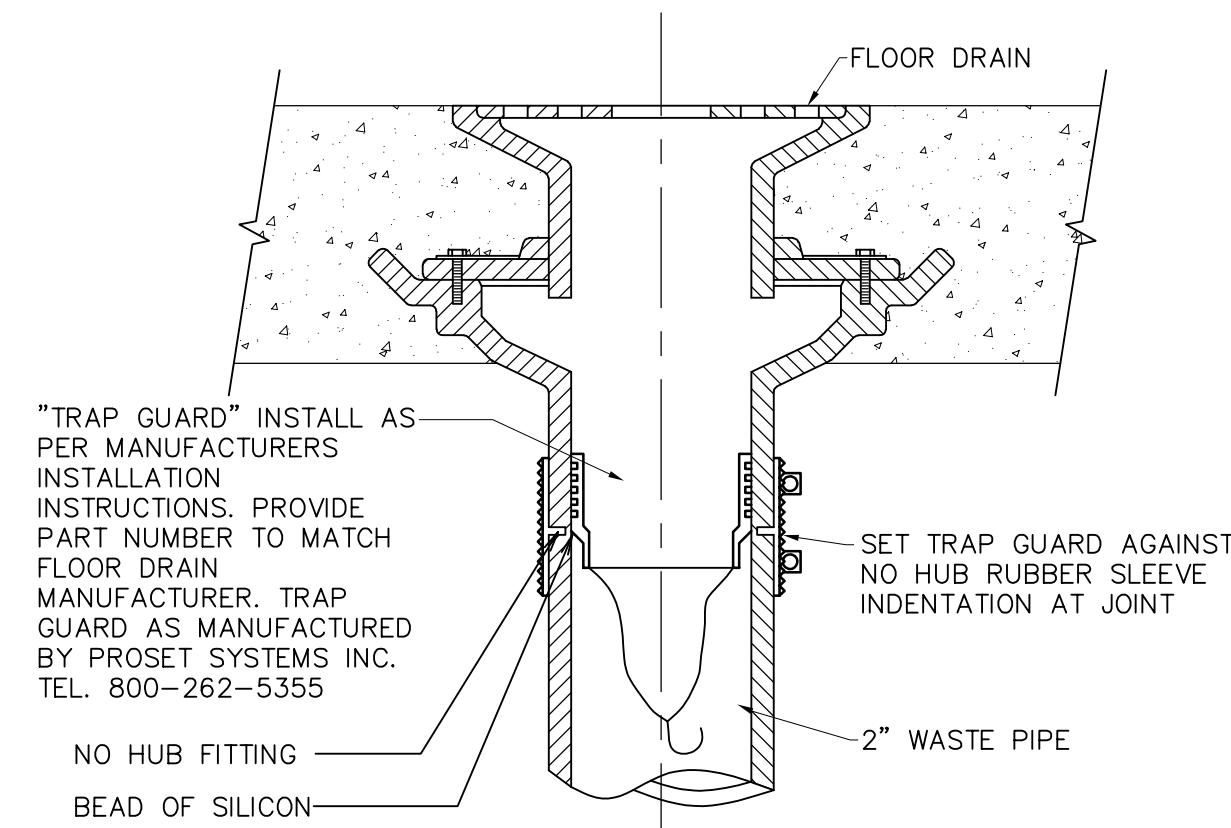

TRAP GUARD TRAP SEAL

SCALE: NONE


A

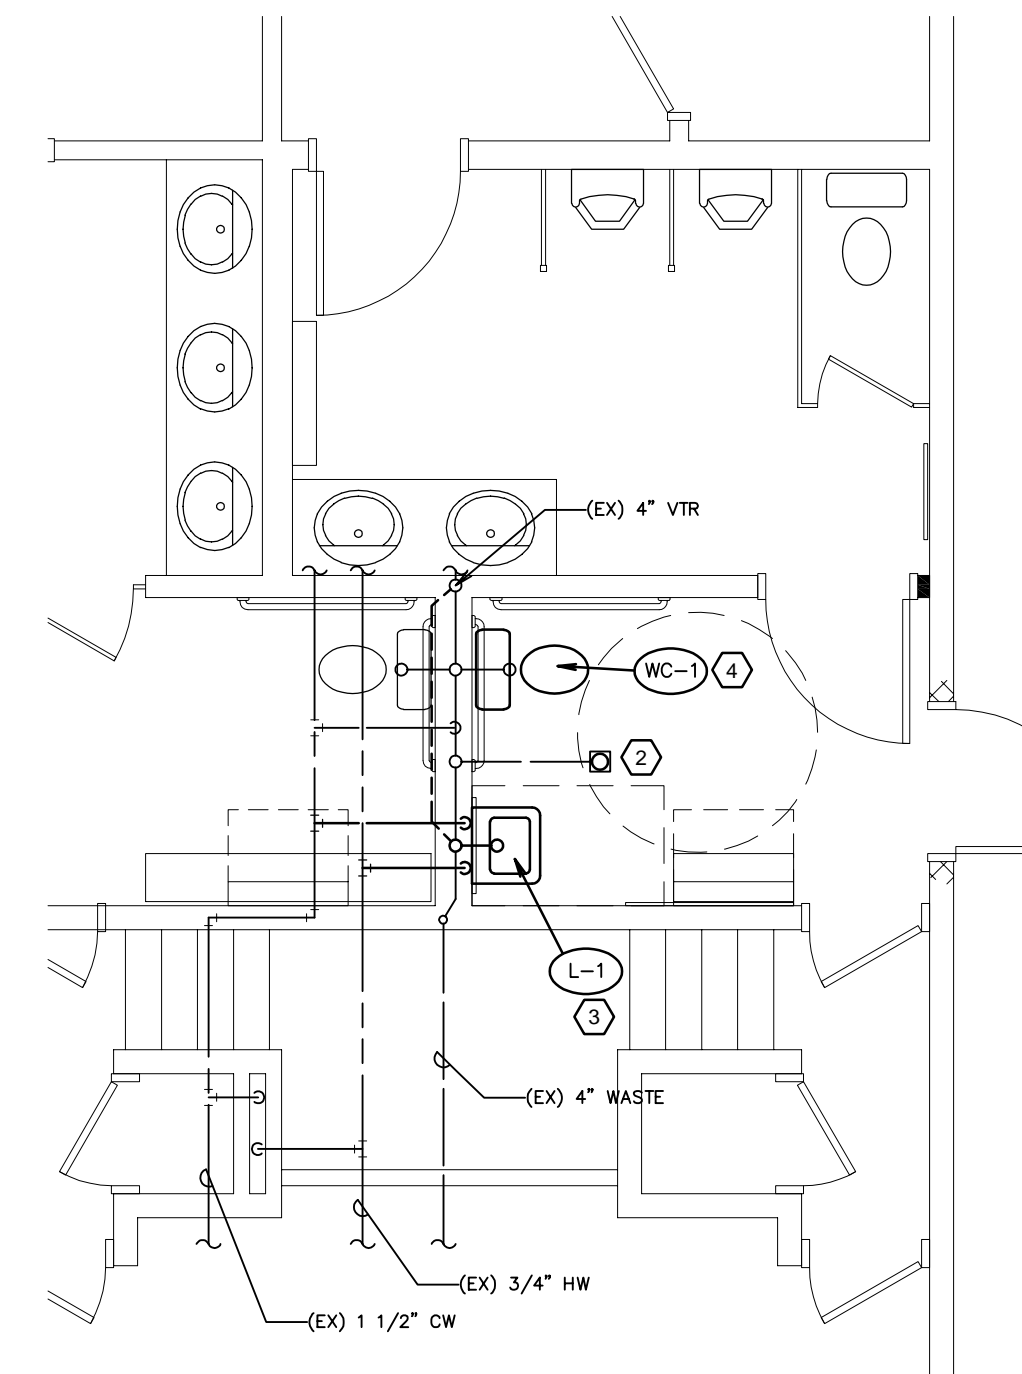

PARTIAL NEW PLUMBING PLAN

SCALE: 1/8" = 1'-0"


2

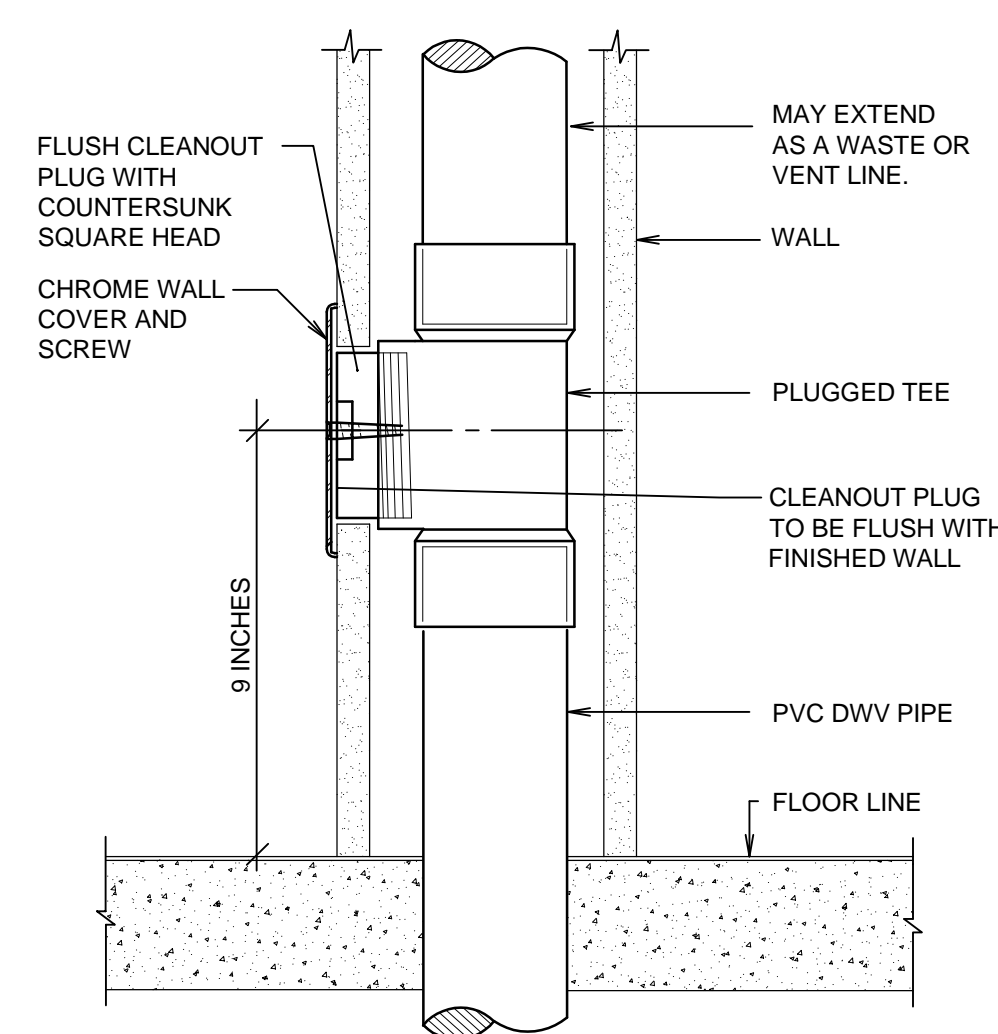

WALL CLEANOUT DETAIL

SCALE: NONE

B

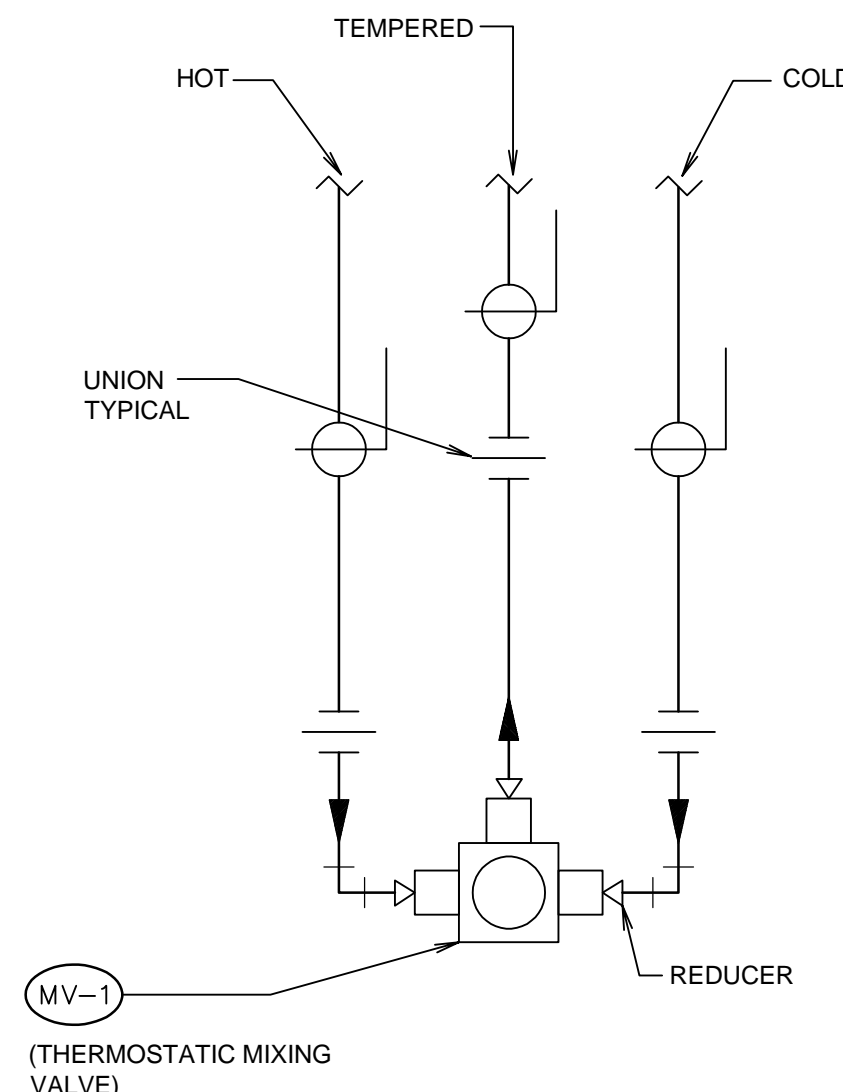

MIXING VALVE PIPING SCHEME

SCALE: NONE

C

PLUMBING FIXTURE SCHEDULE

MARK	FIXTURE	PIPE SIZE					REMARKS
		TRAP	WASTE	VENT	C.W.	H.W.	
(WC-1)	WATER CLOSET	INT.	4"	2"	1/2"	-	FLUSH TANK, 18" RIM HEIGHT (ACCESSIBLE FIXTURE) ① ③
(L-1)	LAVATORY	1-1/4"	1-1/4"	1-1/2"	1/2"	1/2"	SELF-SUPPORTING 20"x18" ① ②

- ① WHEN MOUNTED PER ARCHITECTURAL ELEVATIONS, ADA ACCESSIBILITY REQUIREMENTS ARE SATISFIED.
- ② THERMOSTATIC MIXING VALVE MV-1, MOUNT UNDER LAVATORY, SEE C/P101
- ③ SALVAGE AND REINSTALL EXISTING FIXTURE IN EXISTING LOCATION

LEGEND

SYMBOL OR ABBREVIATION	MEANING	SYMBOL OR ABBREVIATION	MEANING
HOT WATER LINE	-----	WALL CLEANOUT	WCO
COLD WATER LINE	-----	CLEANOUT	CO
VENT LINE	-----	FLOOR CLEANOUT	FCO
WASTE LINE	-----	BALL VALVE	⊕
VENT THRU ROOF	VTR	UNION	— —


GENERAL PLUMBING NOTES

1. IF CONTRACTOR ENCOUNTERS MATERIAL THAT MAY CONTAIN ASBESTOS, HE SHALL IMMEDIATELY STOP WORK IN THIS AREA AND NOTIFY OWNER.
2. EXISTING PIPE LOCATIONS AND PIPE SIZES SHOWN HAVE BEEN TAKEN FROM EXISTING DRAWINGS. CONTRACTOR IS TO FIELD DETERMINE EXACT SIZE, ELEVATION, AND LOCATION OF EXISTING PIPING INSIDE THE BUILDING AT SPECIFIED CONNECTION POINTS PRIOR TO STARTING ANY WORK.
3. SAW CUT OR CORE DRILL ALL NEW PENETRATIONS THROUGH EXISTING MASONRY CONSTRUCTION.
4. PATCH AND REPAIR ALL EXISTING SURFACES DAMAGED BY NEW CONSTRUCTION TO MATCH EXISTING.
5. DEMOLITION - GENERAL:
 - a. REMOVE ALL RELATED PIPING AND APPURTENANCES UNLESS OTHERWISE NOTED.
 - b. REMOVE EXISTING SURFACES (WALL, ROOF, FLOOR, CEILING, ETC.) AS REQUIRED AND REPLACE TO MATCH EXISTING.
 - c. PATCH AND REPAIR ALL EXISTING SURFACES (WALL, ROOF, FLOOR, CEILING, ETC.) TO MATCH EXISTING.
6. REMODEL - GENERAL:
 - a. CONCEAL ALL PIPING, EQUIPMENT, AND APPURTENANCES UNLESS OTHERWISE NOTED.
 - b. REMOVE EXISTING SURFACES (WALL, ROOF, FLOOR, CEILING, ETC.) AS REQUIRED AND REPLACE TO MATCH EXISTING.
 - c. REFER TO MECHANICAL SHEETS FOR ANY ADDITIONAL WORK.
7. ALL PLUMBING SHALL COMPLY WITH THE MOST STRINGENT OF APPLICABLE CODES, ORDINANCES, OR THE SPECIFICATIONS.
8. ALL FIXTURES SHALL BE PROPERLY VENTED TO THE ATMOSPHERE. FOR INDIVIDUAL LINE SIZES TO FIXTURES, SEE SCHEDULE THIS SHEET.
9. DUE TO THE CLOSE PROXIMITY OF THE WATER, DRAIN, AND VENT PIPING AS WELL AS DUCTWORK, EQUIPMENT, AND HVAC PIPING, THE PLUMBING CONTRACTOR SHALL COORDINATE THE INSTALLATION WITH THE MECHANICAL AND SHEET METAL CONTRACTORS.

KEYED PLUMBING NOTES

- ① REMOVE AND SALVAGE EXISTING WATER CLOSET. MAINTAIN EXISTING WATER SUPPLY AND WASTE CONNECTIONS.
- ② PROTECT EXISTING FLOOR DRAIN TO REMAIN.
- ③ NEW WALL-MOUNTED LAVATORY. ADD HOT AND COLD WATER PIPING IN WALL FROM EXISTING PIPING. ADD AND CONNECT TO EXISTING WASTE AND VENT PIPING IN WALL. INSTALL WITH CARRIERS IN WALL. FIELD VERIFY LOCATIONS OF EXISTING PIPING FOR CONNECTIONS.
- ④ REINSTALL EXISTING SALVAGED WATER CLOSET WITH NEW SEAL IN EXISTING LOCATION AND CONNECT TO WATER SUPPLY AND WASTE PIPING.

bradley gygi architect & associates, pllc
 2160 South 1300 East, Suite 500
 Salt Lake City, Utah 84106
 801.747.2451

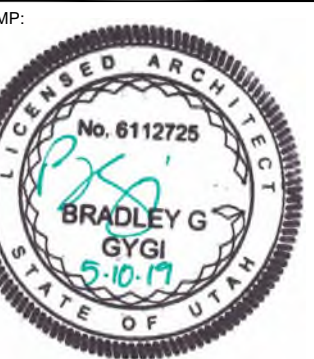


PROJECT FOR:
THE CHURCH OF JESUS CHRIST OF LATTER-DAY SAINTS
 TAYLORSVILLE 12,25
 TAYLORSVILLE UT SOUTH STAKE
 4505 SOUTH BRIANS WAY
 TAYLORSVILLE, UTAH

PROJECT NUMBER:
 5141710-19020101
 DATE:
 10 MAY 2019
 PROPERTY NUMBER:
 5141710

DRAWN BY:
 BGG
 CHECKED:
 BGG

SHEET TITLE:
PLUMBING PLANS


SHEET:
P101

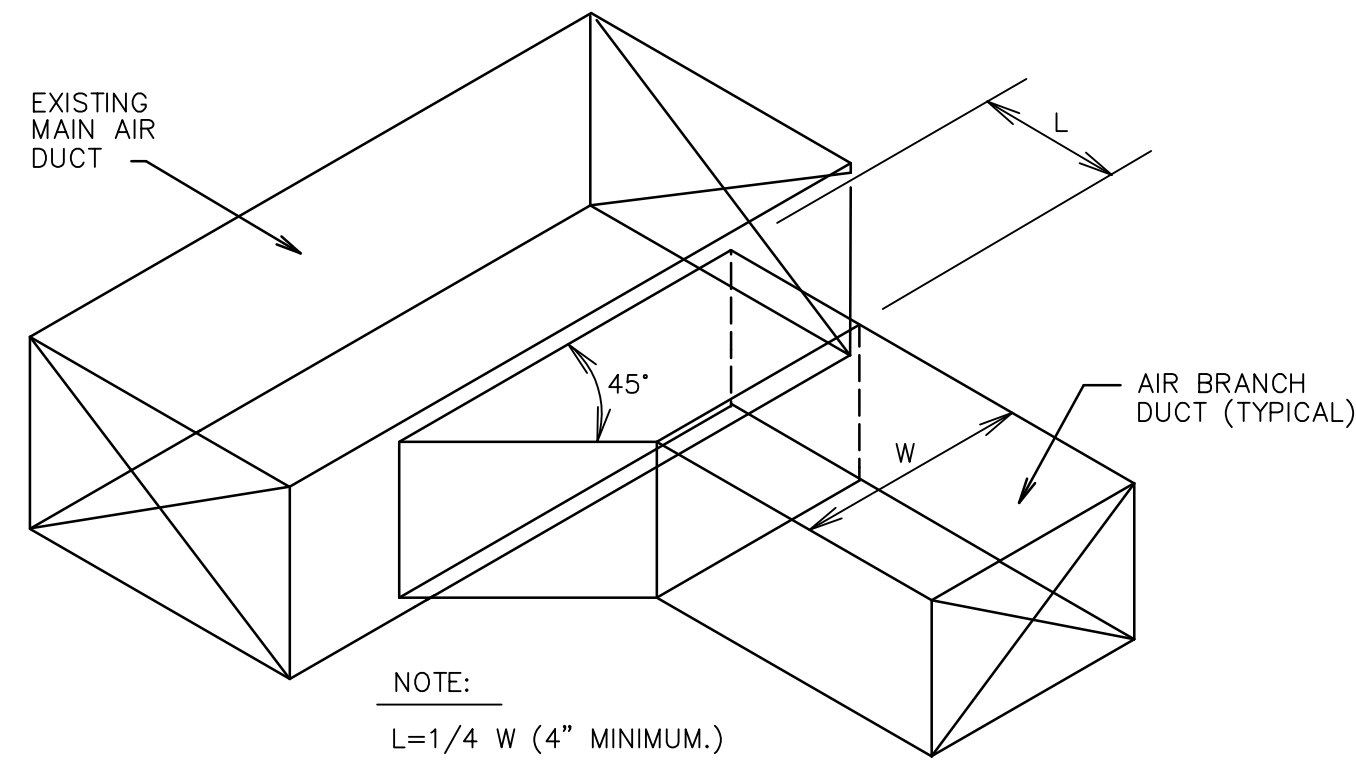

SUPPLY OR RETURN AIR DUCT BRANCH CONNECTION DETAIL

SCALE: NONE


A

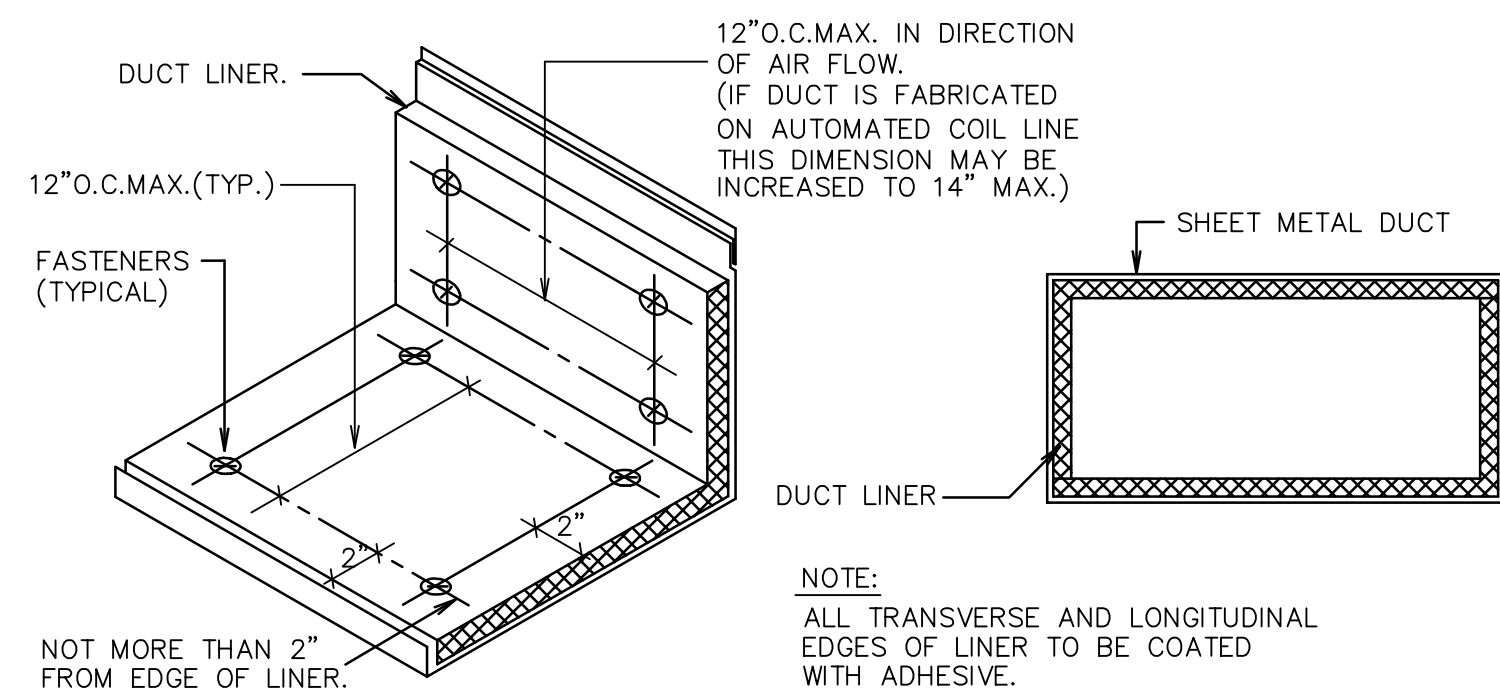

DUCT LINER DETAIL

SCALE: NONE


B

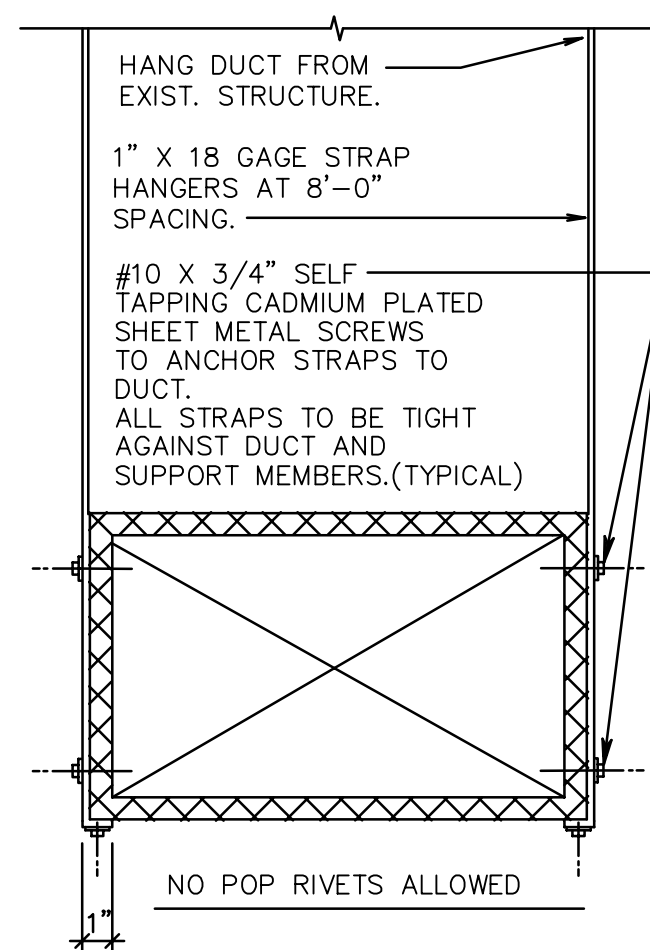

DUCT STRAP HANGER DETAIL

SCALE: NONE


C

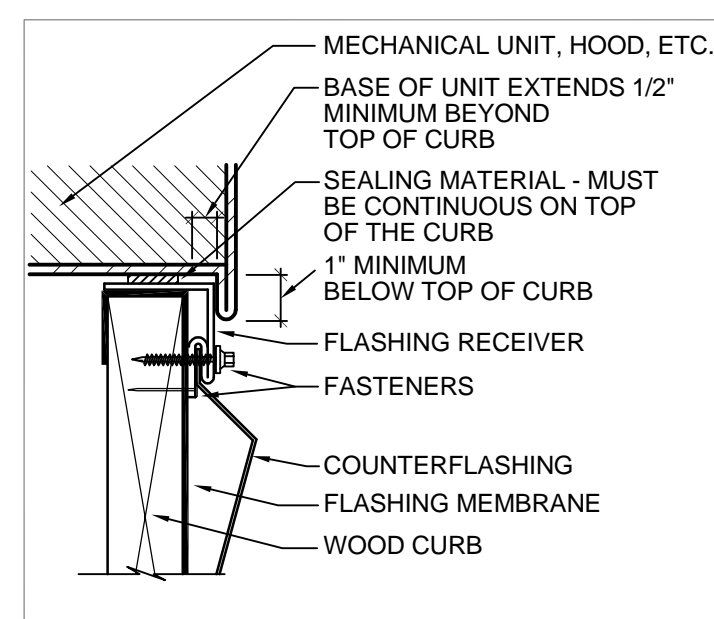


RAISED CURB DETAIL

NOT TO SCALE

D

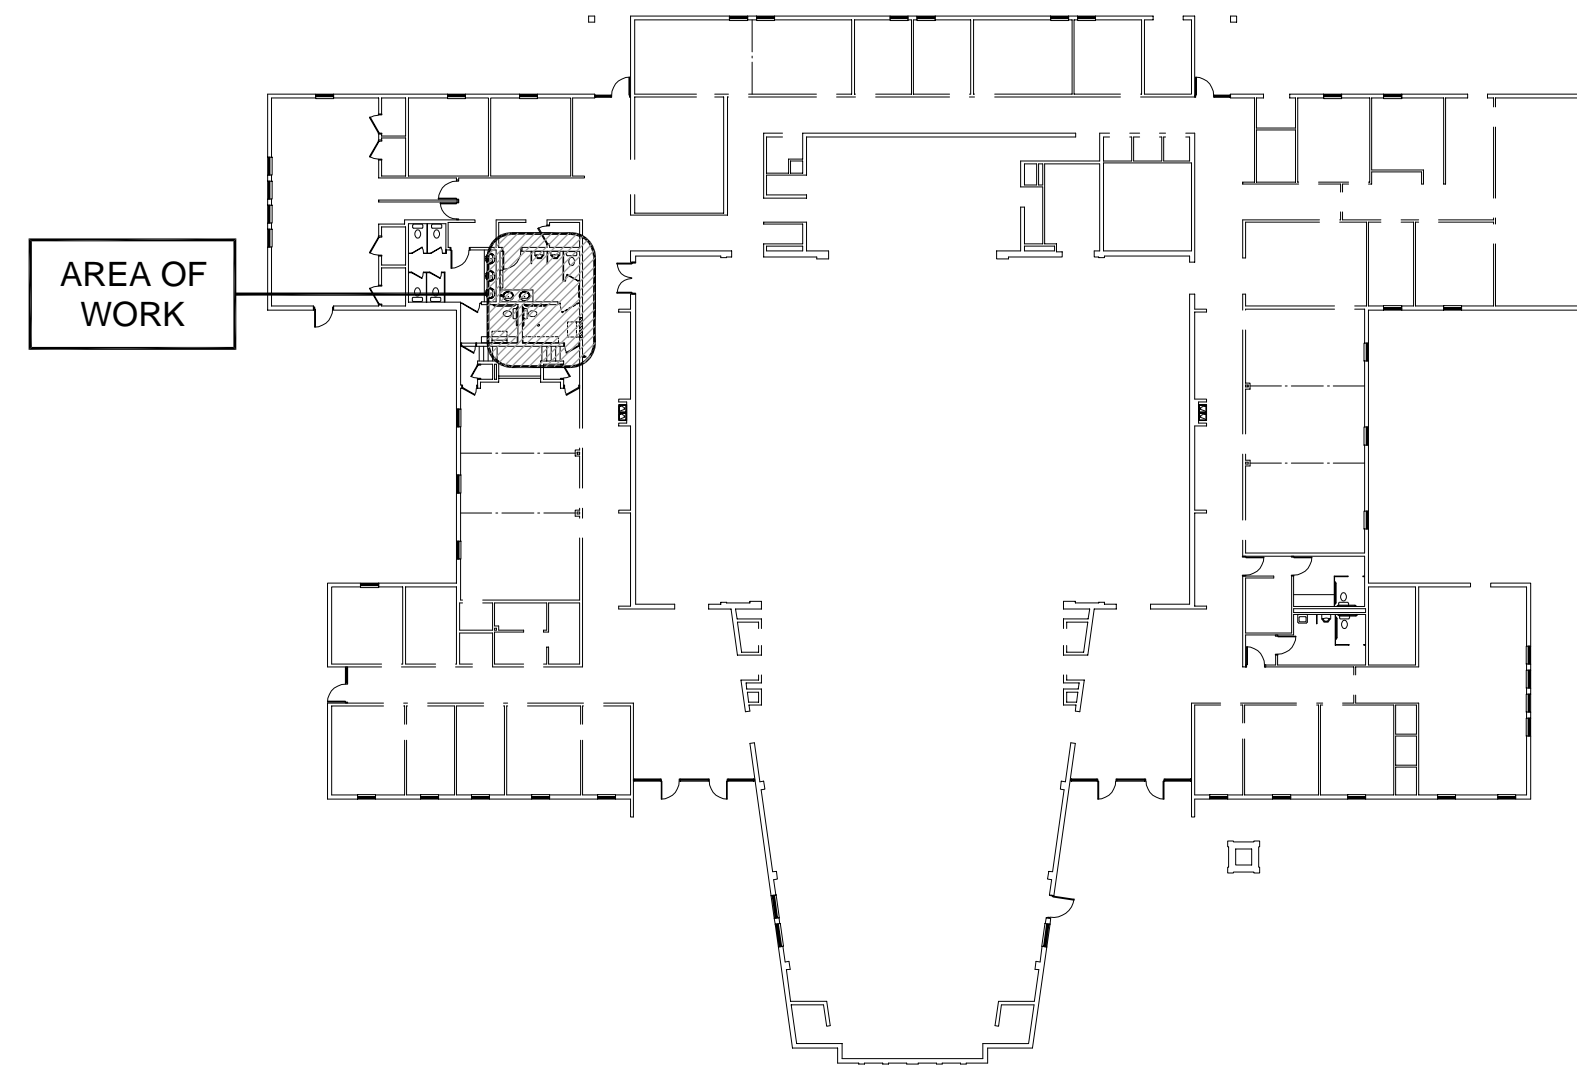

KEY PLAN

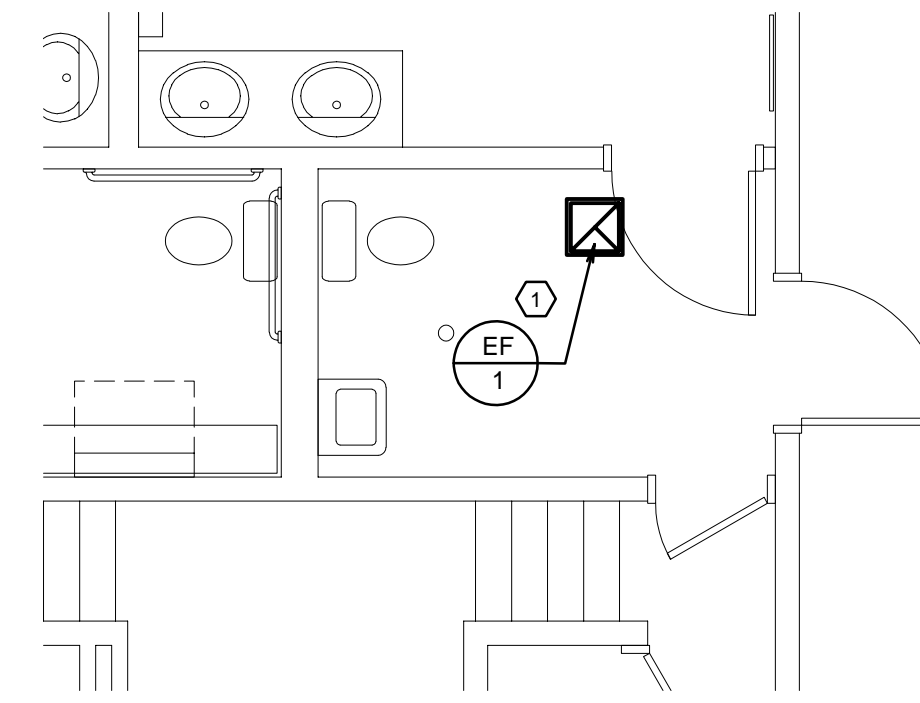

MECHANICAL PLAN


SCALE: 1/4" = 1'-0"

1

EXHAUST FAN SCHEDULE					
MARK	SERVES ROOM	MIN. S.C.F.M.	STATIC PRESSURE IN. W.G.	MINIMUM WATTS	REMARKS
EF 1	RESTROOM 101	95	0.25	81W	2 3 4

- 1 SET BALANCE DAMPERS TO CFM LISTED
- 2 CONTROL BY DIVISION 26.
- 3 VOLTAGE IS 115V / 1 PHASE / 60 HZ
- 4 PROVIDE BACKDRAFT DAMPER AND BALANCING DAMPER.


LEGEND			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	BRANCH DUCT TAKE-OFF. SEE DETAIL E/M3.1		MANUAL VOLUME DAMPER
	SINGLE THICKNESS TURNING VANES		BACKDRAFT DAMPER (INSTALL AT EACH EXHAUST DISCHARGE DUCT)
	DUCT TRANSITION		EXISTING DUCT TO BE REMOVED
SA	SUPPLY AIR		EXISTING DUCT TO REMAIN
RA	RETURN AIR		

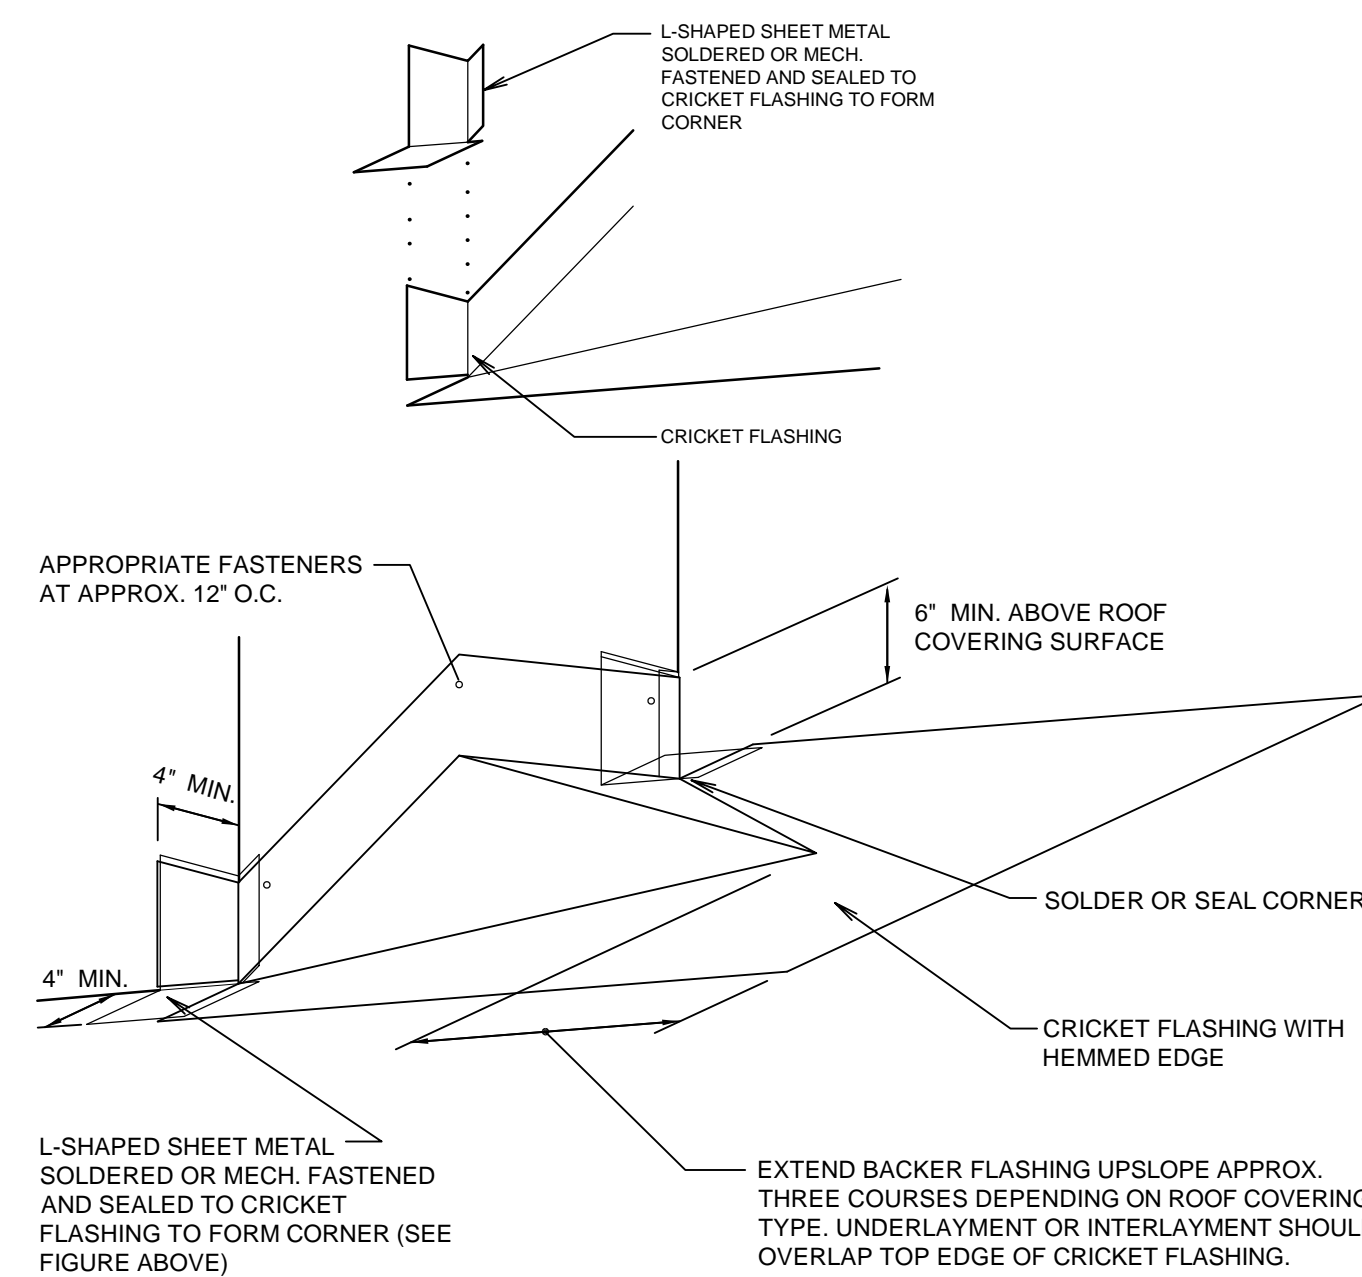

CRICKET FLASHING

SCALE: NONE

E

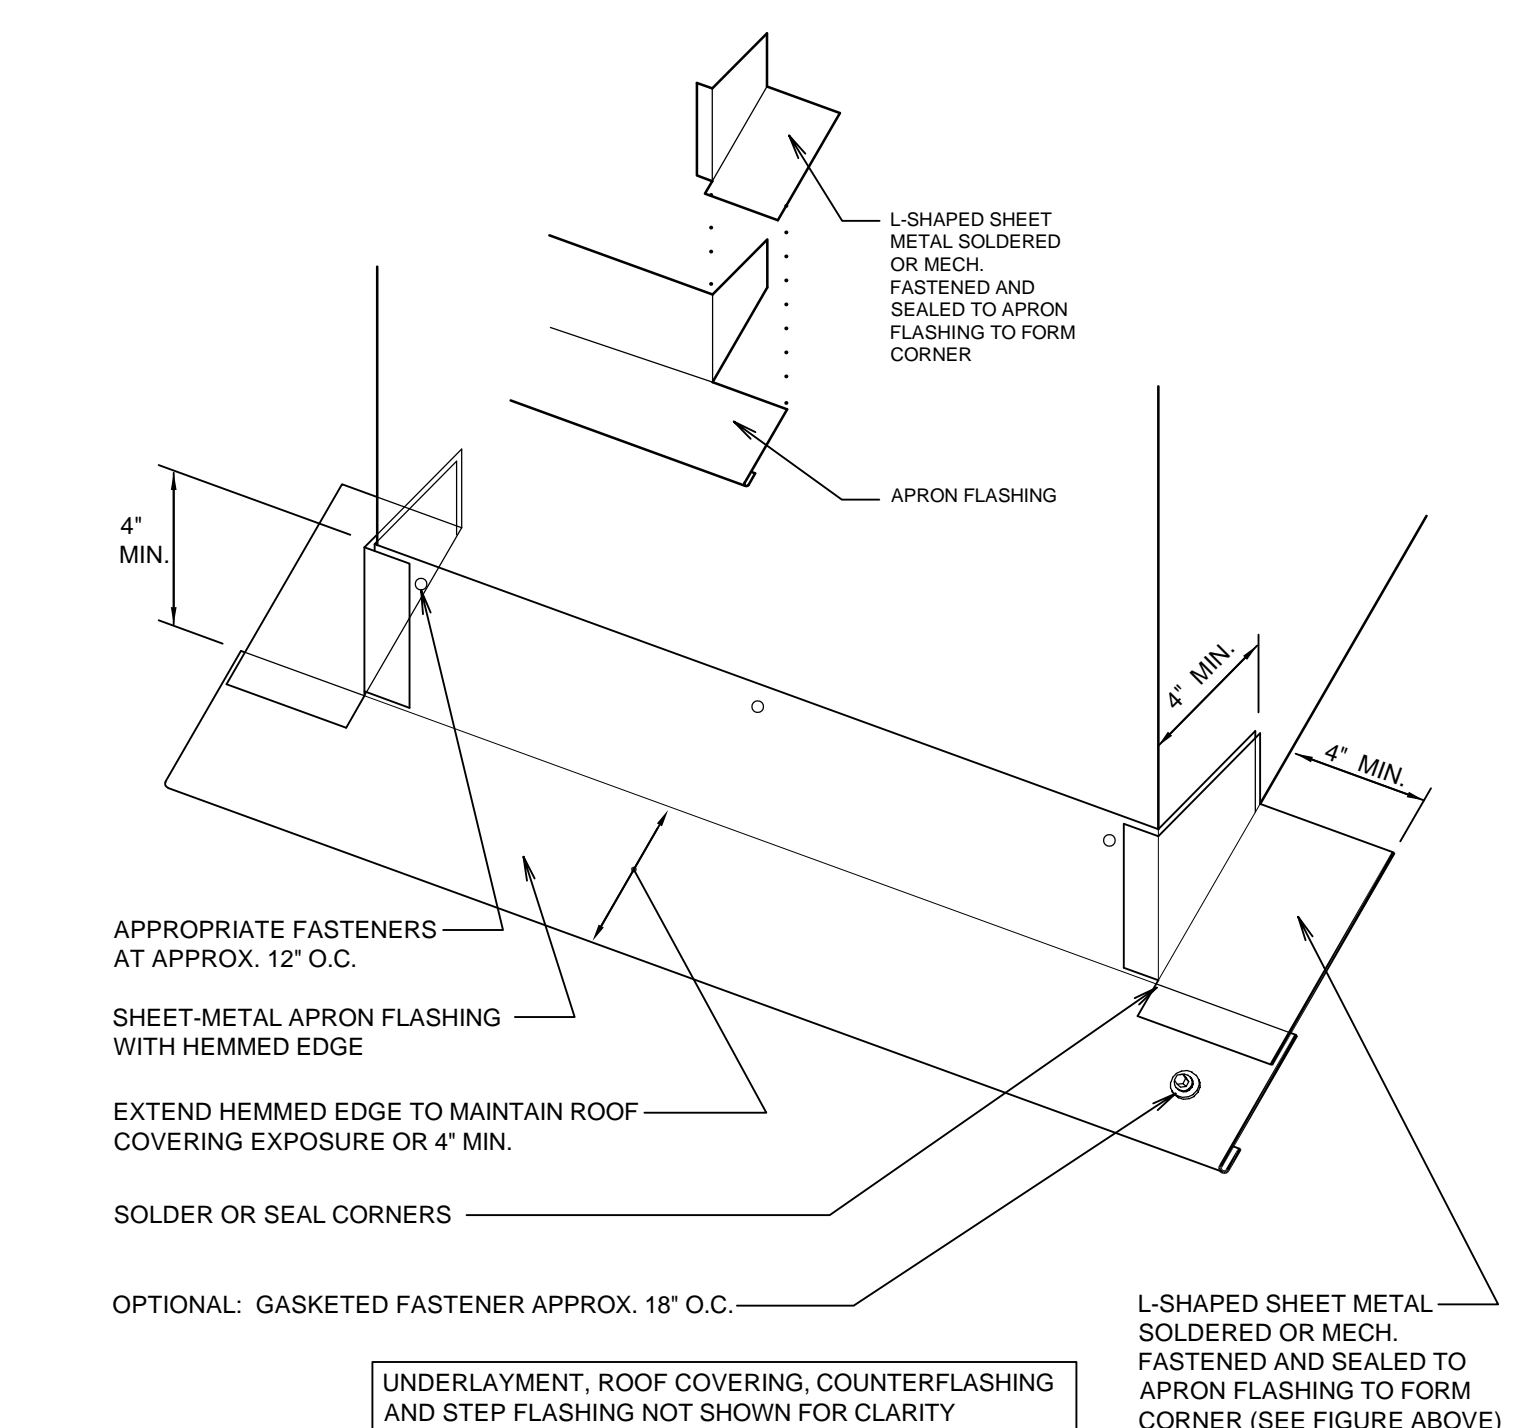

APRON FLASHING

SCALE: NONE

F



GENERAL MECHANICAL NOTES

1. EXISTING DUCTWORK, SIZES, AND EQUIPMENT SHOWN FOR CONTRACTOR'S REFERENCE. FIELD DETERMINE EXACT SIZE, ELEVATION, AND LOCATION OF EXISTING ITEMS, INCLUDING THEIR RELATIONSHIP WITH INTENDED WORK PRIOR TO STARTING ANY WORK.
2. DRAWINGS SHOW GENERAL ARRANGEMENT OF PIPING, DUCTWORK, EQUIPMENT, ETC. FOLLOW AS CLOSELY AS ACTUAL BUILDING CONSTRUCTION AND WORK OF OTHER TRADES WILL PERMIT. BECAUSE OF THE SMALL SCALE OF THE DRAWINGS, IT IS NOT POSSIBLE TO INDICATE ALL OFFSETS, FITTINGS, AND ACCESSORIES THAT MAY BE REQUIRED. INVESTIGATE STRUCTURAL AND FINISH CONDITIONS AFFECTING THIS WORK AND ARRANGE WORK ACCORDINGLY. PROVIDE SUCH FITTINGS, VALVES, AND ACCESSORIES REQUIRED TO MEET CONDITIONS.
3. PATCH AND REPAIR ALL EXISTING SURFACES DAMAGED BY NEW CONSTRUCTION TO MATCH EXISTING.
4. BALANCE SYSTEMS BEING REVISED COMPLETELY TO CFM'S SHOWN. MAKE ADJUSTMENTS NECESSARY TO ACHIEVE AIR FLOW QUANTITIES SHOWN ON DRAWINGS.
5. DUCT DIMENSIONS ARE CLEAR DIMENSIONS INSIDE DUCT LINER. DO NOT ROUTE PIPES ABOVE ELECTRICAL PANELS. MAINTAIN CLEAR ACCESS SPACE IN FRONT OF ALL ELECTRICAL PANELS 4'-0" DEEP AND 6'-6" HIGH.
7. SAW CUT OR CORE DRILL ALL NEW PENETRATIONS THROUGH EXISTING MASONRY CONSTRUCTION.
8. IF CONTRACTOR ENCOUNTERS MATERIAL THAT MAY CONTAIN ASBESTOS, HE SHALL IMMEDIATELY STOP WORK IN THIS AREA AND NOTIFY THE OWNER.
9. DEMOLITION - GENERAL:
 - a. REMOVAL OF EQUIPMENT, PIPING, OR DUCTWORK TO INCLUDE REMOVAL OF ALL RELATED APPURTENANCES SUCH AS WIRING, CONDUIT, SUPPORTS, ETC. AND MODIFICATIONS REQUIRED FOR A COMPLETE OPERATING SYSTEM.
 - b. REMOVE BRANCH CONDUIT AND WIRE COMPLETELY. TERMINATE AT JUNCTION BOX.
 - c. PATCH AND REPAIR ALL EXISTING SURFACES (WALL, ROOF, FLOOR, CEILING, ETC.) TO MATCH EXISTING.
10. REMODEL - GENERAL:
 - a. ALL NEW CONDUIT, PIPING, DUCT, EQUIPMENT, AND APPURTENANCES TO BE CONCEALED UNLESS OTHERWISE NOTED.
 - b. EXISTING SURFACES (WALL, ROOF, FLOOR, CEILING, ETC.) TO BE REMOVED AS REQUIRED AND REPLACED TO MATCH EXISTING.

KEYED MECHANICAL NOTES

- 1 NEW EXHAUST FAN. NEW DUCTWORK PIPING THROUGH ATTIC TO NEW ROOF CURB WITH PENTHOUSE OR MANUFACTURER'S ROOF TERMINATION KIT. PER MANUFACTURER'S RECOMMENDATIONS.

bradley gygi architect & associates, pllc
 2160 South 1300 East, Suite 500
 Salt Lake City, Utah 84106
 801.747.2451

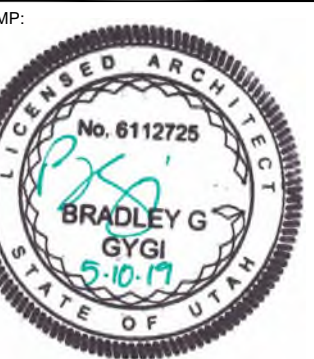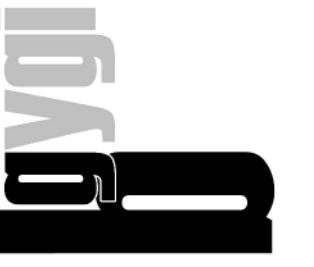


PROJECT FOR:
THE CHURCH OF JESUS CHRIST OF LATTER-DAY SAINTS
 TAYLORSVILLE UT SOUTH STAKE
 4505 SOUTH BRIANS WAY
 TAYLORSVILLE, UTAH

PROJECT NUMBER:
 5141710-19020101
 DATE:
 10 MAY 2019
 PROPERTY NUMBER:
 5141710


DRAWN BY: BGG	CHECKED: BGG
------------------	-----------------

SHEET TITLE:
MECHANICAL PLANS AND ROOFING DETAILS

SHEET:
M101

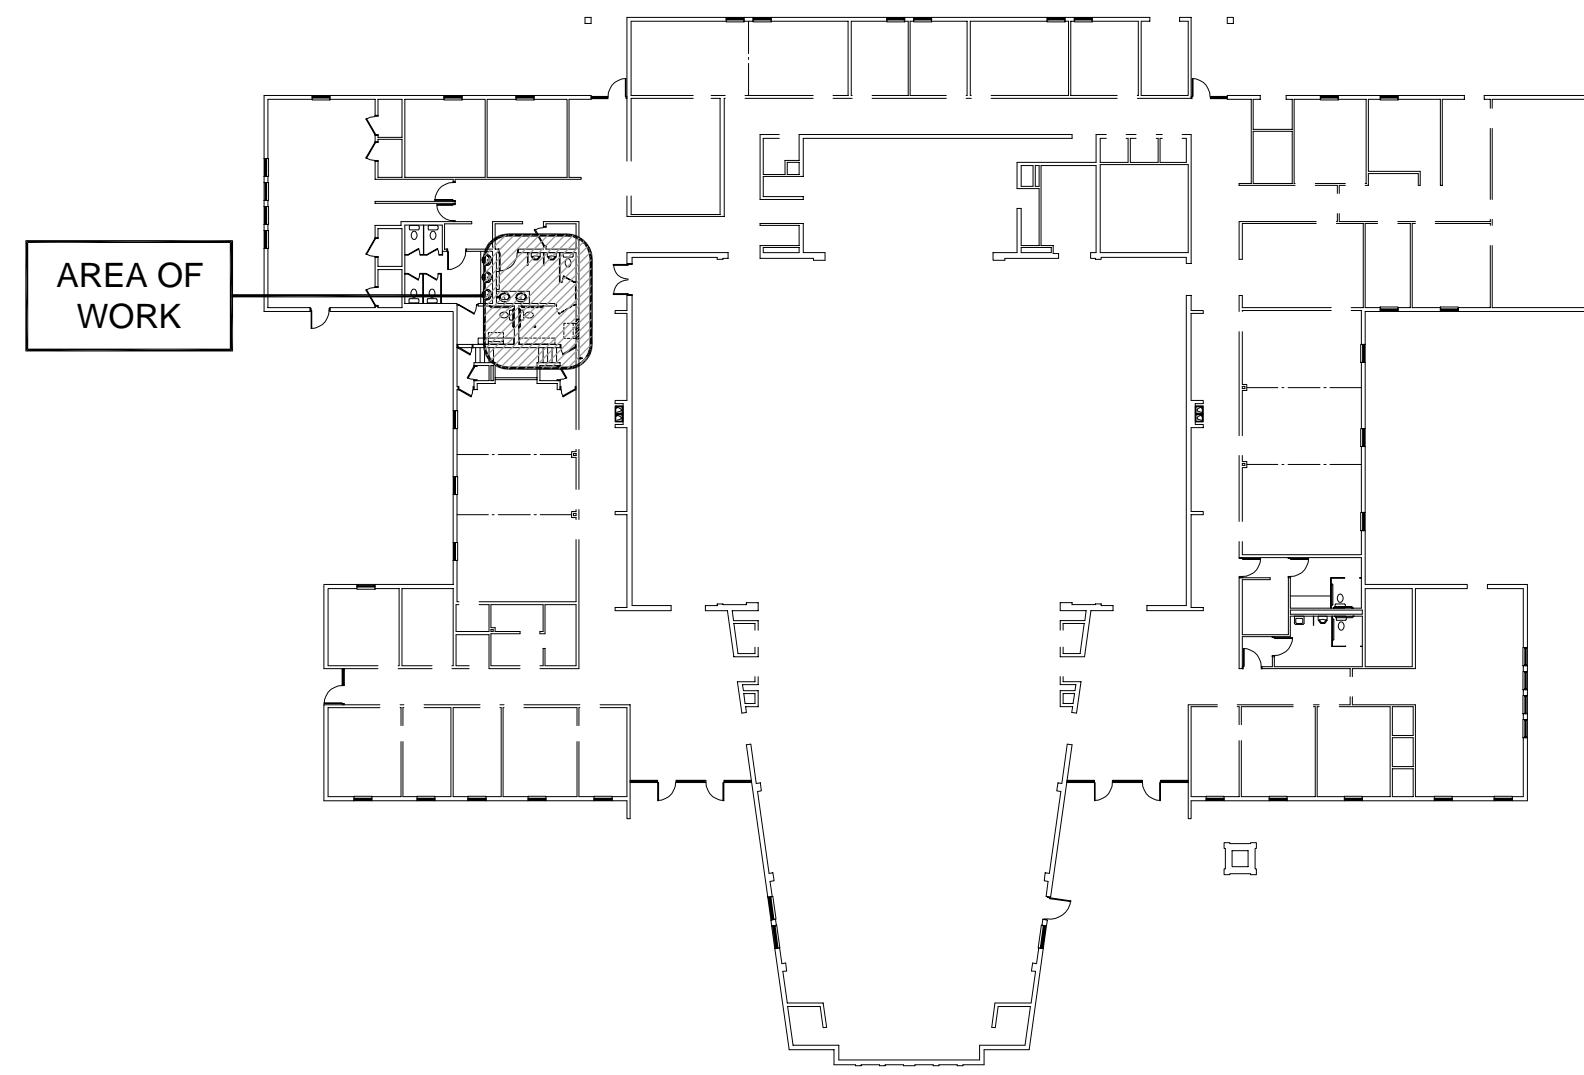


KEY PLAN

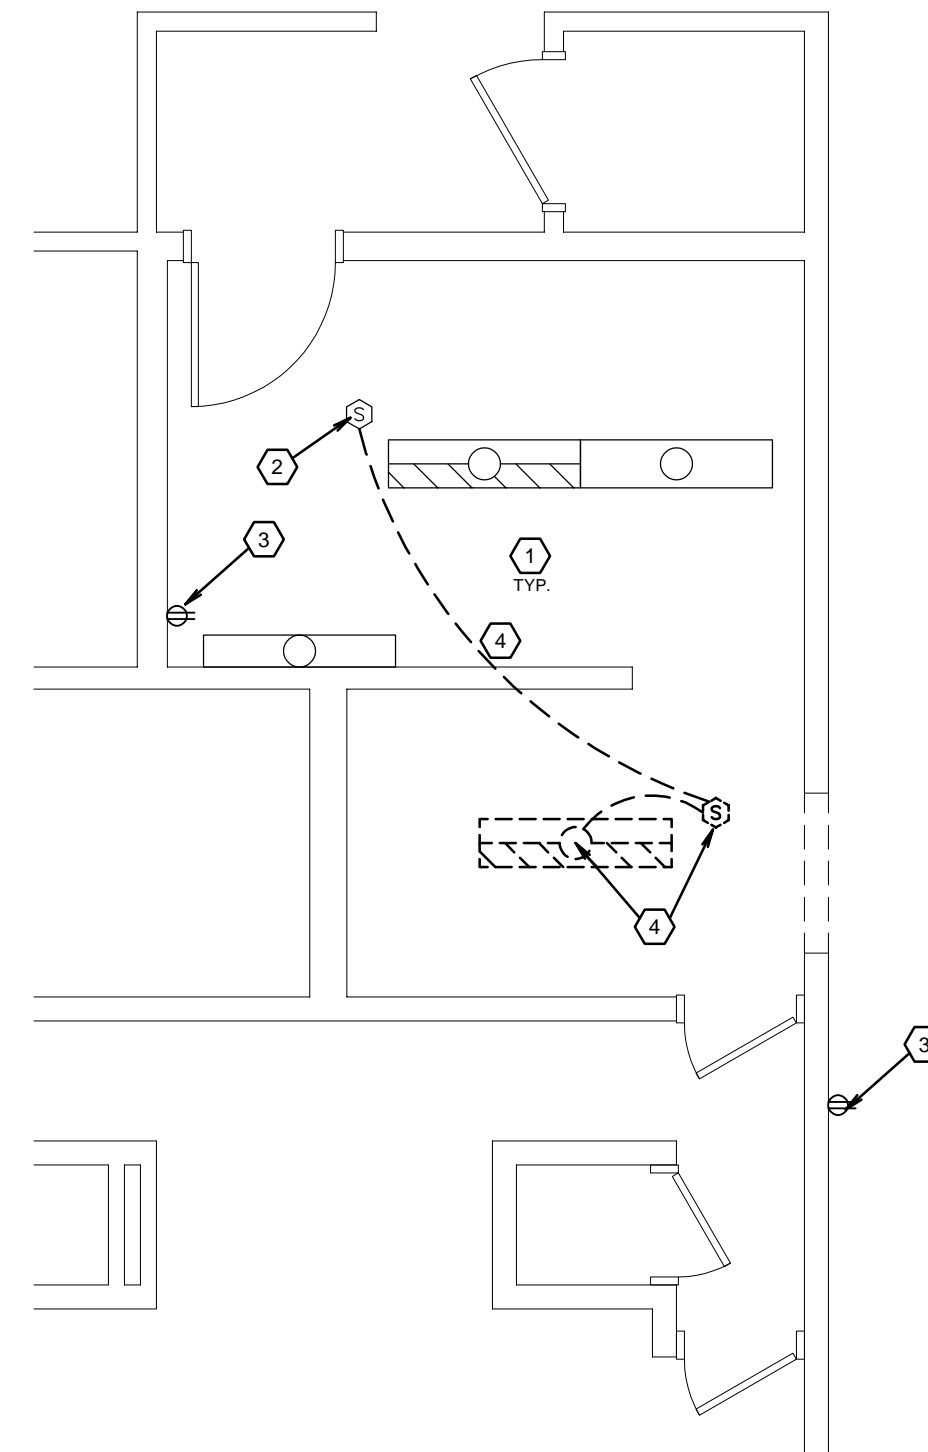

EXISTING / DEMOLITION ELECTRICAL PLAN 1

SCALE: 1/4" = 1'-0"

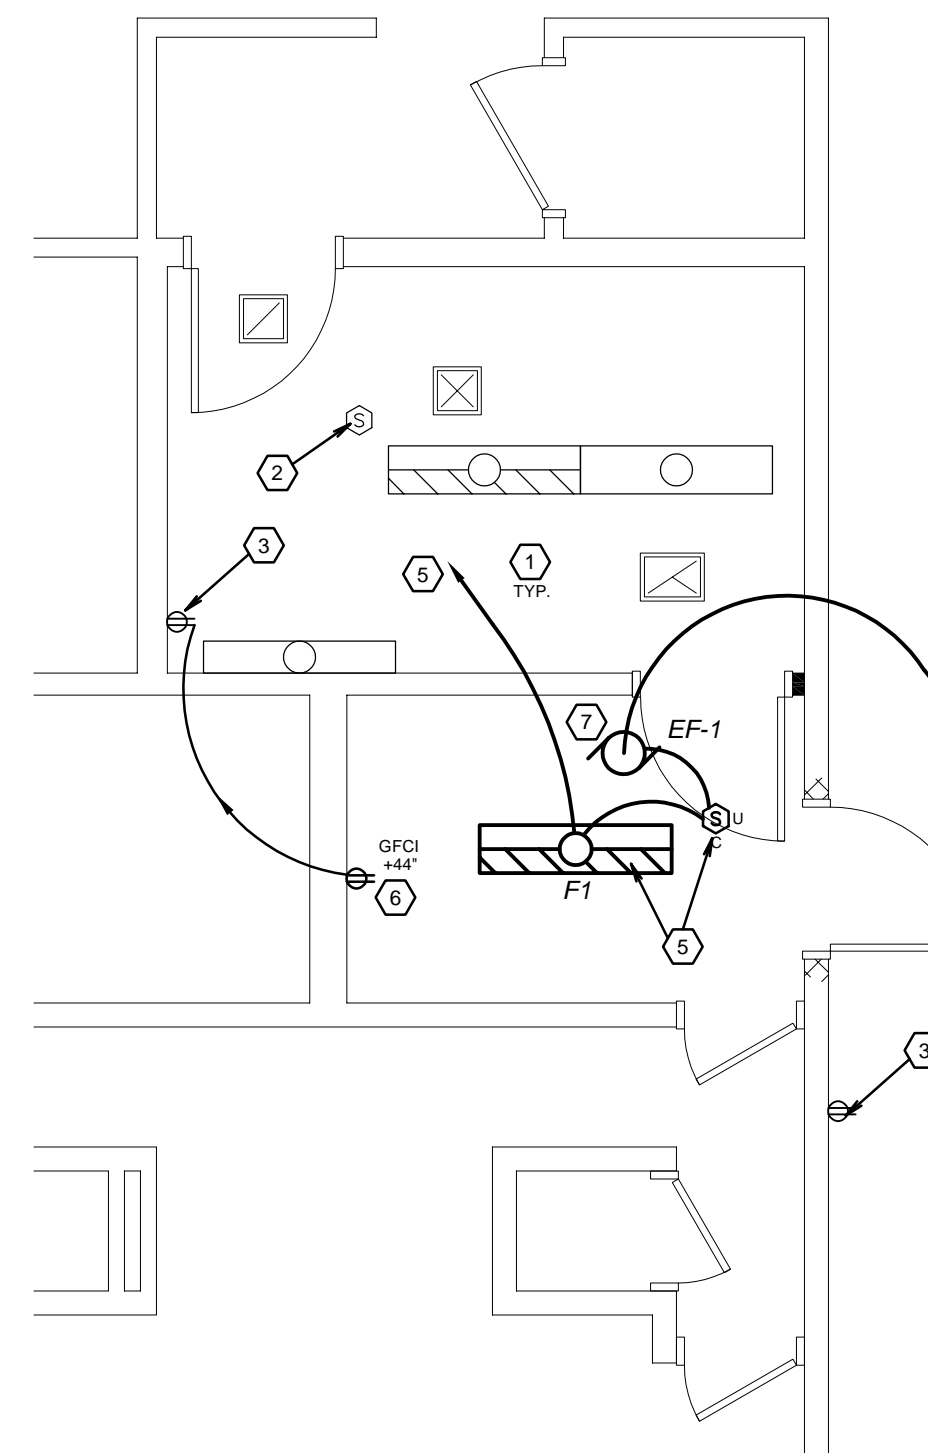

PARTIAL NEW PLUMBING PLAN 2

SCALE: 1/8" = 1'-0"

EXHAUST FAN SCHEDULE						
SYM	DESCRIPTION	CIRCUIT	FEEDER	VOLTS / PHASE	DISCONNECT	HP/WATTS
EF-1	EXHAUST FAN	NEW	2 #12, #12 GR	120 / 1 (VERIFY EXISTING)	INCLUDED	100W

FIXTURE SCHEDULE						
SYM	MANUFACTURER		LOAD (VA)	LAMPS	MOUNTING	REMARKS
	NAME	CATALOG NUMBER				
F1						SALVAGE AND REINSTALL EXISTING FIXTURE SEE SPEC. 285100 *EMERGENCY BATTERY PACK WHERE SHOWN HATCHED ON PLAN

GENERAL ELECTRICAL NOTES

- WHERE AFFECTED BY DEMOLITION OR NEW CONSTRUCTION, RELOCATE, EXTEND OR REPAIR RACEWAYS, CONDUCTORS, OUTLETS AND APPARATUS TO ALLOW CONTINUED USE OF ELECTRICAL SYSTEM. USE METHODS AND MATERIALS AS SPECIFIED FOR NEW CONSTRUCTION.
- REROUTE ANY EXISTING CONDUIT OR ELECTRICAL FIXTURES OR DEVICES WHICH ARE ENCOUNTERED DURING THE DEMOLITION OR WHICH ARE CONFLICTING WITH NEW CONSTRUCTION FOR THIS PROJECT. REROUTE THE CONDUIT AND MAINTAIN THE SERVICE OR MOVE FIXTURES AND APPLIANCES AS REQUIRED TO ACCOMMODATE THE WORK OF OTHER TRADES DURING THIS CONSTRUCTION. MOVE OR REMOVE FIXTURES AND DEVICES TO ACCOMMODATE OTHER TRADES DURING THIS CONSTRUCTION AND REINSTALL THE SAME AT THE CONCLUSION OF THE PROJECT.
- CIRCUIT NEW LIGHT FIXTURES, DEVICES, MOTORS AND FIXTURES TO EXISTING PANEL. PROVIDE NEW BREAKERS, CONDUIT AND WIRE AS REQUIRED FOR INSTALLATION.
- PROVIDE RACEWAYS AND BOXES CALLED OUT IN MECHANICAL DRAWINGS. SEE MECHANICAL DRAWINGS AND COORDINATE WITH MECHANICAL CONTRACTOR.
- NO SURFACE-MOUNTED CONDUIT WILL BE ALLOWED ON PROJECT. PATCH AND REPAIR WALLS AND CEILINGS THAT ARE DAMAGED BY ELECTRICAL DEMOLITION AND INSTALLATION. SAW-CUT THROUGH WALLS AS REQUIRED TO CONCEAL ALL CONDUIT. FIELD VERIFY EXISTING CONDITIONS.
- AT REMODELED ROOMS, REPLACE ALL EXISTING OUTLETS, SWITCHES, COVER PLATES AND OTHER DEVICES WHICH ARE NOT REMOVED FOR THIS WORK WITH NEW. ALL NEW DEVICES AND COVER PLATES TO BE WHITE COLOR.
- MAINTAIN POWER AND SWITCHES FOR EXISTING LIGHTING AND OUTLETS AT ALL ADJACENT AREAS.


ELECTRICAL KEYED NOTES

- EXISTING LIGHT FIXTURES TO REMAIN - TYPICAL.
- EXISTING CEILING SENSOR TO REMAIN.
- EXISTING OUTLET(S) TO REMAIN, TYPICAL.
- REMOVE AND SALVAGE EXISTING LIGHT FIXTURE. REMOVE EXISTING CEILING SENSOR. MAINTAIN EXISTING WIRING FOR MODIFICATION.
- REINSTALL EXISTING SALVAGED LIGHT FIXTURE. WIRE WITH NEW CEILING SENSOR(S). MODIFY EXISTING WIRING TO SEPARATE FROM EXISTING MEN'S LIGHT FIXTURES AND SENSOR. CIRCUIT TO EXISTING LIGHT FIXTURE CIRCUIT.
- NEW GROUND FAULT OUTLET. CIRCUIT TO NEW 20A SINGLE PHASE BREAKER IN NEAREST EXISTING PANEL.
- NEW EXHAUST FAN. SWITCH WITH NEW LIGHT FIXTURE SENSOR. CONNECT TO NEW 20A CIRCUIT BREAKER FOR EXHAUST FAN IN NEAREST PANEL.

ELECTRICAL SYMBOLS LEGEND

- FLUORESCENT LIGHT FIXTURE
- FLUORESCENT LIGHT FIXTURE WITH EMERGENCY BATTERY PACK
- EXHAUST FAN (MOTOR OUTLET)
- OCCUPANCY SENSOR CEILING MOUNT, ULTRASONIC
- OCCUPANCY SENSOR WALL SWITCH, PASSIVE INFRARED
- SINGLE POLE SWITCH
- DUPLEX RECEPTACLE OUTLET
- GFCI DUPLEX RECEPTACLE OUTLET

bradley gygi architect & associates, pllc
 2160 South 1300 East, Suite 500
 Salt Lake City, Utah 84106
 801.747.2451

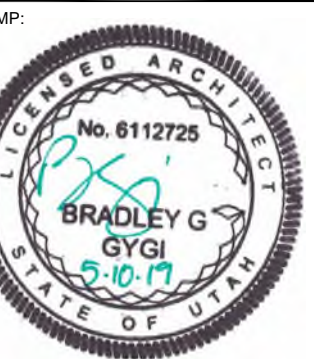

PROJECT FOR:
THE CHURCH OF JESUS CHRIST OF LATTER-DAY SAINTS
 TAYLORSVILLE 12,25
 TAYLORSVILLE UT SOUTH STAKE
 4505 SOUTH BRIANS WAY
 TAYLORSVILLE, UTAH

PROJECT NUMBER:
 5141710-19020101
 DATE:
 10 MAY 2019
 PROPERTY NUMBER:
 5141710

DRAWN BY: BGG	CHECKED: BGG
------------------	-----------------

SHEET TITLE:
ELECTRICAL PLANS

SHEET:
E101